


## Female Crimp Reverse Fix


- ❖ Mates with male connectors shown on page 62.
- ❖ Allows for further flexibility in system design.
- ❖ Crimp contacts supplied loose and are inserted from rear.
- ❖ Large bore 22 AWG, small bore 24 – 28 AWG.
- ❖ Part numbers are for housings and the equivalent number of contacts.
- ❖ Spare contacts are available – see page 51.
- ❖ Version also available for 28 – 32 AWG cable – see page 47.

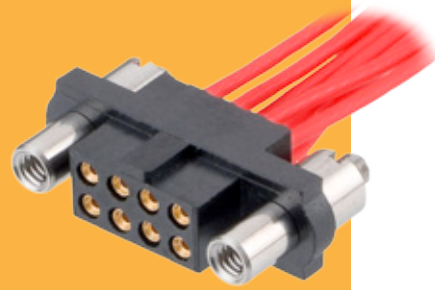

### WITH JACKSCREWS

### CALCULATION


<b>A</b>	B + 12
<b>B</b>	Total no. of contacts - 2
<b>C</b>	B + 7

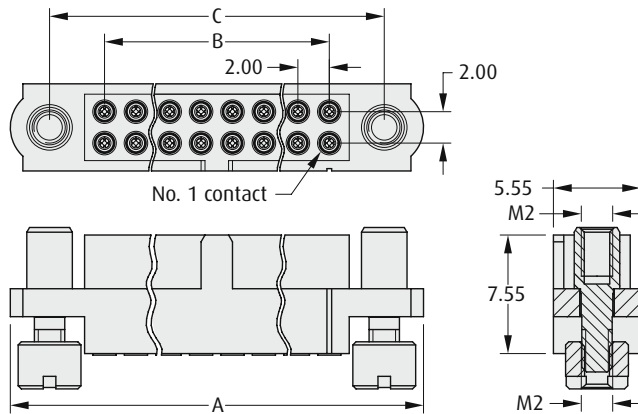

### TOOLS

**Recommended Crimp Tool** – M22520/2-01  
**Positioner** – T5747  
**Contact Insertion/Removal Tool** – Z80-280  
 See pages 87 to 89  
 ❖ Instruction sheets available at [www.harwin.com/downloads/instructions](http://www.harwin.com/downloads/instructions)

### WIRE STRIPPING DETAILS

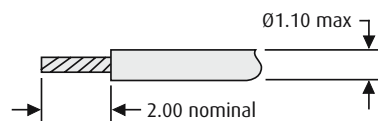

### HOW TO ORDER

**M80 - XXX XX XX**

**SERIES CODE**

**TYPE**

<b>462</b>	Large Bore Connector
<b>463</b>	Small Bore Connector

**FINISH**

<b>05</b>	Gold	
<b>42</b>	Gold + Tin	

**TOTAL NO. OF CONTACTS**

**04 to 50**

Even numbers only

All dimensions in mm.