


# HD10164

## 8 Line Multiplexer

The HD10164 can be used whenever data multiplexing or parallel to serial conversion is desirable. Full parallel gating permits equal delays through any data path. The output of the HD10164 incorporates a buffer gate with eight data inputs

and an enable. A high level on the enable forces the output low. The HD10164 can be connected directly to a data bus, due to its open emitter output and output enable.

### ■ PIN ARRANGEMENT

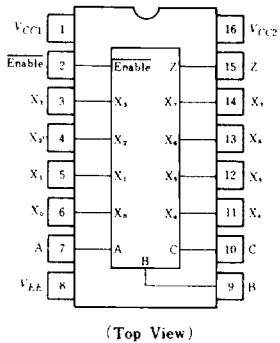


### ■ FUNCTION TABLE

Enable	Address Inputs			Z
	C	B	A	
L	L	L	L	X <sub>0</sub>
L	L	L	H	X <sub>1</sub>
L	L	H	L	X <sub>2</sub>
L	L	H	H	X <sub>3</sub>
L	H	L	L	X <sub>4</sub>
L	H	L	H	X <sub>5</sub>
L	H	H	L	X <sub>6</sub>
L	H	H	H	X <sub>7</sub>
H	×	×	×	L

× : Don't Care

### ■ BLOCK DIAGRAM

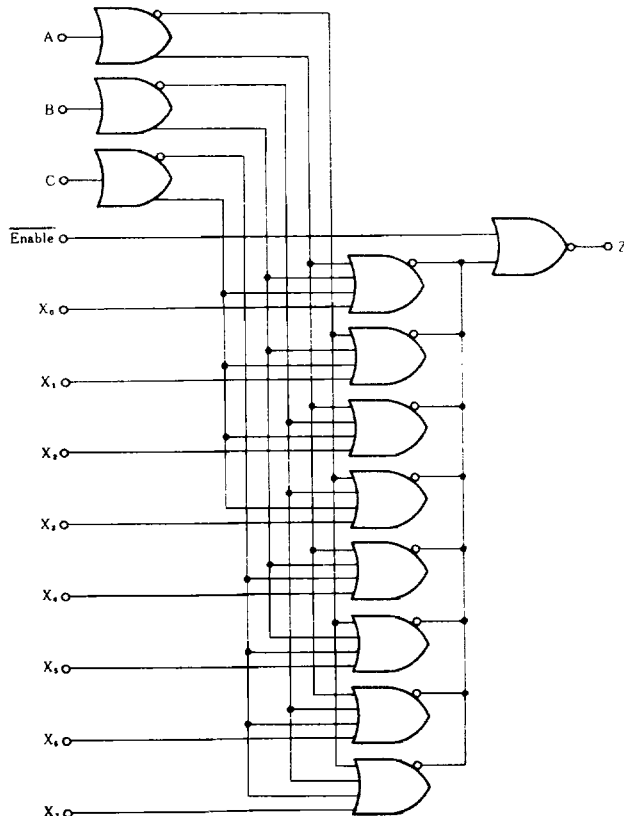



■ DC CHARACTERISTICS ( $V_{EE} = -5.2V$ ,  $T_a = -30 \sim +85^\circ C$ )

Item	Symbol	Test Condition		min	typ	max	Unit
Supply Current	$I_{EE}$		25°C	—	60	75	mA
Input Current	$I_{IH}$	$V_{IH} = -0.810V$	25°C	—	—	265	$\mu A$
	$I_{II}$	$V_{IL} = -1.850V$	25°C	0.5	—	—	$\mu A$
Output Voltage	$V_{OH}$	$V_{IH} = -0.890V$ or $V_{IL} = -1.890V$	-30°C	-1.060	—	-0.890	V
		$V_{IH} = -0.810V$ or $V_{IL} = -1.850V$	25°C	-0.960	—	-0.810	
		$V_{IH} = -0.700V$ or $V_{IL} = -1.825V$	85°C	-0.890	—	-0.700	
	$V_{OL}$	$V_{IL} = -1.890V$ or $V_{IH} = -0.890V$	-30°C	-1.890	—	-1.675	V
		$V_{IL} = -1.850V$ or $V_{IH} = -0.810V$	25°C	-1.850	—	-1.650	
		$V_{IL} = -1.825V$ or $V_{IH} = -0.700V$	85°C	-1.825	—	-1.615	
Output Threshold Voltage	$V_{ONA}$	$V_{INA} = -1.205V$ or $V_{ILA} = -1.500V$	-30°C	-1.080	—	—	V
		$V_{INA} = -1.105V$ or $V_{ILA} = -1.475V$	25°C	-0.980	—	—	
		$V_{INA} = -1.035V$ or $V_{ILA} = -1.440V$	85°C	-0.910	—	—	
	$V_{OLA}$	$V_{ILA} = -1.500V$ or $V_{INA} = -1.205V$	-30°C	—	—	-1.655	V
		$V_{ILA} = -1.475V$ or $V_{INA} = -1.105V$	25°C	—	—	-1.630	
		$V_{ILA} = -1.440V$ or $V_{INA} = -1.035V$	85°C	—	—	-1.595	

■ AC CHARACTERISTICS ( $V_{EE} = -3.2V$ ,  $V_{CC} = +2.0V$ ,  $T_a = -30 \sim +85^\circ C$ )

Item	Symbol	Input	Output	Test Condition	min	typ	max	Unit			
Propagation Delay Time	$t_{PLH}$	data	Z	$R_L = 50\Omega$	-30°C	1.5	—	4.7	ns		
					25°C	1.5	3.0	4.5			
					85°C	1.6	—	4.8			
	$t_{PHL}$				address	Z	-30°C	1.5	—	4.7	ns
							25°C	1.5	3.0	4.5	
							85°C	1.6	—	4.8	
	$t_{PLH}$	Enable	Z				-30°C	1.9	—	6.3	ns
							25°C	2.0	4.0	6.0	
							85°C	2.2	—	6.5	
	$t_{PHL}$				—	—	-30°C	1.9	—	6.3	ns
							25°C	2.0	4.0	6.0	
							85°C	2.2	—	6.5	
Rise/Fall Time	$t_{PLH}$	—	Z	-30°C			0.9	—	3.3	ns	
				25°C			1.0	2.0	2.9		
				85°C			1.0	—	3.1		
	$t_{PHL}$			—	—	-30°C	0.9	—	3.3	ns	
						25°C	1.0	2.0	2.9		
						85°C	1.0	—	3.1		

SWITCHING TIME TEST CIRCUIT

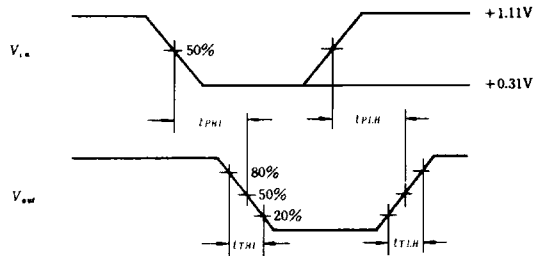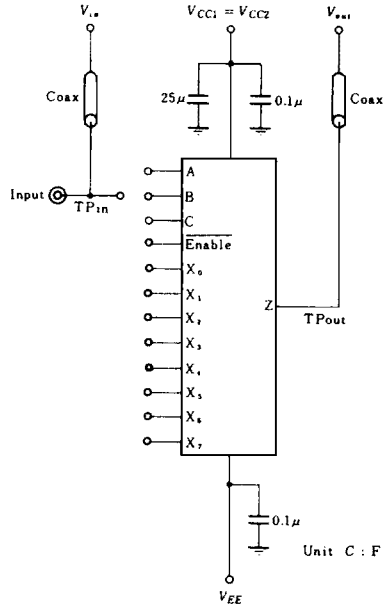

- Notes)
1. 50Ω termination to ground located in each scope channel input. All input and output cables to the scope are equal lengths of 50Ω coaxial cable.
  2. Wire length should be <6.35mm (1/4 inch) from TP<sub>in</sub> to input pin and TP<sub>out</sub> to output pin.
  3. Unused outputs connected in a 50Ω resistor to ground.