

## CTMLP100804BF

### Series

From 0.47 $\mu$ H to 4.7 $\mu$ H




### SPECIFICATIONS

Please specify tolerance code when ordering.  
CTMLP100804BF-R47\_ ← M =  $\pm$ 20%, N =  $\pm$ 30%

Part Number	Inductance ( $\mu$ H)	Test Frequency	DCR $\pm$ 25% ( $\Omega$ )	Isat Max. (mA)	Irms Max. (mA)
CTMLP100804BF-R47_	0.47	3.0MHz, 200mV	0.04	1500	1800
CTMLP100804BF-1R0_	1.0	3.0MHz, 200mV	0.055	900	1600
CTMLP100804BF-1R5_	1.5	3.0MHz, 200mV	0.07 $\pm$ 30%	800	1400
CTMLP100804BF-2R2_	2.2	3.0MHz, 200mV	0.08	500	1300
CTMLP100804BF-3R3_	3.3	3.0MHz, 200mV	0.10	400	1200
CTMLP100804BF-4R7_	4.7	3.0MHz, 200mV	0.11	300	1100

### PHYSICAL DIMENSIONS

Size	A	B	C Max.	D
mm	2.5 $\pm$ 0.20	2.0 $\pm$ 0.20	1.00	0.6 $\pm$ 0.2
inches	0.098 $\pm$ 0.008	0.079 $\pm$ 0.008	0.039	0.024 $\pm$ 0.008

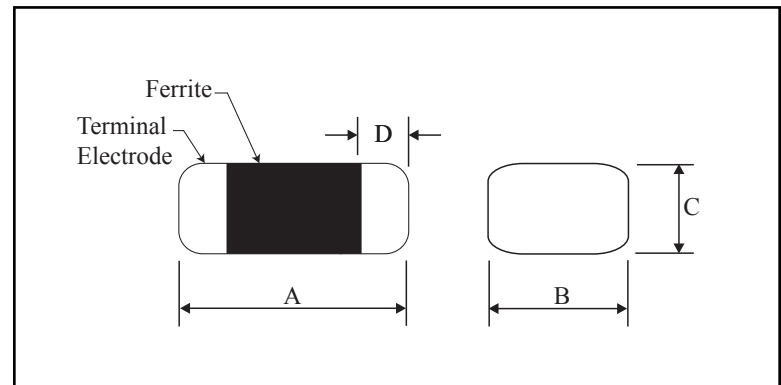

### CHARACTERISTICS

**Description:** SMD Multi-layer Power Chip Inductor. Magnetically shielded.

**Applications:** Cellular phones, Power modules, DC/DC converters, Digital cameras, DVD, Portable devices, etc.

**Operating Temperature:** -55°C to 125°C (including self - temp. rise).

**Isat:** Inductance drop 30% from its value with current.

**Irms:** 40°C temperature rise from 25°C ambient with current.

**Inductance Tolerance:**  $\pm$ 20% (M),  $\pm$ 30% (N)

**Packaging:** Tape & Reel.

**Miscellaneous:** **RoHS Compliant.**

**Additional Information:** Additional electrical & physical information available upon request.

**Samples available. See website for ordering information.**

### PAD LAYOUT

