

800mA Bipolar Linear Regulator

LR1117S

DESCRIPTION

LR1117S is a series of low dropout three-terminal regulators with a dropout of 1.2V at 0.8A load current.LR1117S features a very low standby current 2mA compared to 5mA of competitor. Other than a fixed version, Vout = 1.2V,1.5V, 1.8V, 2.5V, 3.3V, 5V, LR1117S has an adjustable version.

LR1117S offers thermal shut down and current limit functions, to assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

LR1117S is available in SOT-223, TO-252, power package.


FEATURES

- Other than a fixed version and an adjustable version, output value can be customized on demand.
- Maximum output current is 800mA
- Standby current: 2mA (typ.)
- Line regulation: 0.1%/V (typ.)
- Load regulation: 10mV (typ.)
- Environment Temperature: -40°C~85°C

APPLICATIONS

- Power Management for Computer Mother Board, Graphic Card
- BLD Monitor and BLD TV
- DVD Decode Board
- ADSL Modem
- Post Regulators for Switching Supplies

TYPICAL APPLICATION



Application circuit of LR1117S fixed version

NOTE: Input capacitor (Cin=10uF) and Output capacitor (Cout=22uF) are recommended in all application circuit. Tantalum capacitor is recommended.



TO-252-2L



SOT-223-3L

Ver1.3 1/10




ORDERING INFORMATION

PIN CONFIGURATION AND MARKING

SOT-223

TO-252

1




Pin Description:

Fixed Version

	Pin No.	Symbol	Definition
1117	1	Gnd	Ground
XX YYZZD	2	Vout	Output
	3	Vin	Input
1 0 0			

Adjustable Version

1			
	Pin No.	Symbol	Definition
1117 XX YYZZD	1 Adj. Adj		Adjustable
	2	Vout	Output
H 2 H	3	Vin	Input



Marking	Designator	Description		
1117 XX YYZZD	1117	Product code		
	XX	Output Voltage		
	YY	assemble year and week		
	ZZ	Manufacture Lot No. (the end two number)		
	D	Version please fixed		

ABSOLUTE MAXIMUM RATING

Parameter		Value	
Max Input Voltage		15V [™]	
Max Operating Junction Temperature(Tj)		150°C	
Ambient Operating Temperature(Ta)		-40°C – 85°C	
Package Thermal Resistance SOT-223		20°C / W	
	TO-252	10°C / W	
Storage Temperature(Ts)		-65°C - 150°C	
Lead Temperature & Time		260°C, 10S	

Note: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

RECOMMENDED WORK CONDITIONS

Parameter	Value
Input Voltage Range	Max. 12V [©]
Operating Junction Temperature(Tj)	-40°C –125°C

Ver1.3 2/10



ELECTRICAL CHARACTERISTICS

Tj=25°C

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
,		LR1117-ADJ				V
Vref	Reference Voltage	10mA≤lout≤0.8A , Vin=3.25V	1.225	1.25	1.275	V
		LR1117-1.2V	1.176	1.2	1.224	V
		0≤lout≤0.8A , Vin=3.2V	1.170	1.2	1.22	•
		LR1117-1.5V	1.47	1.5	1.53	V
		0≤lout≤0.8A , Vin=3.5V LR1117-1.8V				
		0≤lout≤0.8A , Vin=3.8V	1.764	1.8	1.836	V
		LR1117-2.5V	2.45	2.5	2.55	.,
Vout	Output Voltage	0≤lout≤0.8A , Vin=4.5V	2.45 2.5	2.55	V	
		LR1117-3.3V	3.234	3.3	3.366	V
		0≤lout≤0.8A , Vin=5.3V	3.234	5.5	3.300	V
		LR1117-5.0V	4.9	5	5.1	V
		0≤lout≤0.8A , Vin=7.0V				
		LR1117-ADJ		0.1	0.2	%/V
		lout=10mA, 2.75V ≤ Vin ≤ 12V LR1117-1.2V				
		lout=10mA, 2.7V ≤ Vin ≤ 10V		0.1	0.2	%/V
		LR1117-1.5V				
		out=10mA, 3.0V≤Vin≤12V		0.1	0.2	%/V
		LR1117-1.8V				
		lout=10mA, 3.3V≤Vin≤12V		0.1	0.2	%/V
ΔVout	ΔVout Line Regulation	LR1117-2.5V		0.4	0.0	0//
		lout=10mA, 4.0V≤Vin≤12V		0.1	0.2	%/V
		LR1117-3.3V		_		
		lout=10mA, 4.8V≤Vin≤12V		0.1	0.2	%/V
		LR1117-5.0V	0.1	0.1	0.2	%/V
		lout=10mA, 6.5V≤Vin≤12V		0.1		
		LR1117-ADJ				
		Vin =2.75V, 10mA ≤ lout ≤ 0.8A		10	30	mV
		LR1117-1.2V				
		Vin =2.7V, $10\text{mA} \le \text{lout} \le 0.8\text{A}$		10	30	mV
		LR1117-1.5V		40	20	
		Vin=3.0V, $10\text{mA} \le \text{lout} \le 0.8\text{A}$		10	30	mV
		LR1117-1.8V		10	30	mV
		Vin=3.3V, 10mA ≤ lout ≤ 0.8A		10	30	111V
ΔVout	Load Regulation	LR1117-2.5V		4.0	2.2	
		Vin=4.0V, 10mA ≤ lout ≤ 0.8A		10	30	mV
		LR1117-3.3V			_	
		Vin=4.8V, 10mA ≤ lout ≤ 0.8A		10	30	mV
		LR1117-5.0V	10		30	mV
		Vin=6.5V, $10\text{mA} \le \text{lout} \le 0.8\text{A}$		10		
	<u> </u>	VIII-0.3V, 10IIIA - 10UL - 0.0A				

Ver1.3 3/10



ELECTRICAL CHARACTERISTICS continued


Tj=25°C

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Vdrop Dropout Voltage	lout=100mA		1.23	1.3	V	
	Dropout Voltage	lout=1A		1.3	1.5	V
Ilimit	Current Limit	Vin-Vout=2V, Tj=25°C	1.2			А
SVR	Supply Voltage Rejection	f = 120Hz, VIN – VOUT = 3V + 1VPP Ripple		60		dB
Imin	Minimum Load Current	LR1117-ADJ		2	10	mA
		LR1117-1.2V, Vin =10V	1	2	5	mA
	LR1117-1.5V, Vin =11V	1	2	5	mA	
		LR1117-1.8V, Vin =12V	1	2	5	mA
Iq	Iq Quiescent Current	LR1117-2.5V,Vin =12V	1	2	5	mA
		LR1117-3.3V, Vin =12V	1	2	5	mA
		LR1117-5.0V, Vin =12V	1	2	5	mA
IAdj	Adjust Pin Current	LR1117-ADJ Vin =5V, 10mA≤Iout≤0.8A	35	55	120	uA
Ichange	ladj change	LR1117-ADJ Vin =5V, 10mA≤Iout≤0.8A		0.2	10	uA
ΔV/ΔΤ	Temperature coefficient			±100		ppm
		SOT-223		20		
θ_{JC}	Thermal Resistance	TO-252		10		°C/W
	Thermal Resistance	SOT-223 (No heat sink)		120		00/11
$\theta_{\sf JA}$	Junction-to-Ambient (No air flow)	TO-252 (No heat sink)		100		°C/W

Note1: All test are conducted under ambient temperature 25°C and within a short period of time 20ms

Note2: Load current smaller than minimum load current of LR1117S-ADJ will lead to unstable or oscillation output.

BLOCK DIAGRAM

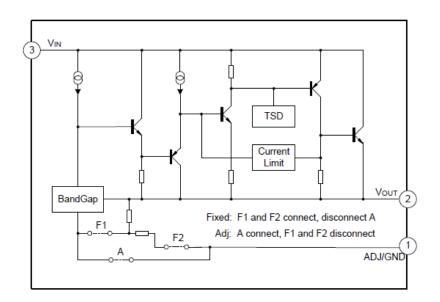

Ver1.3 4/10



DETAILED DESCRIPTION

LR1117S is a series of low dropout voltage, three terminal regulators. Its application circuit is very simple: the fixed version only needs two capacitors and the adjustable version only needs two resistors and two capacitors to work. It is composed of some modules including start-up circuit, bias circuit, bandgap, thermal shutdown, current limit, power transistors and its driver circuit and so on.


The thermal shut down modules can assure chip and its application system working safety when the junction temperature is larger than 140°C.

The bandgap module provides stable reference voltage, whose temperature coefficient is compensated by careful design considerations. The temperature coefficient is under 100 ppm/°C. And the accuracy of output voltage is guaranteed by trimming technique.

TYPICAL APPLICATION

LR1117S has an adjustable version and fixed versions (1.2V, 1.5V, 1.8V, 2.5V, 3.3V, 5V)

Fixed Output Voltage Version




Application circuit of LR1117S fixed version

- 1) Recommend using 10uF tan capacitor or MLCC capacitor as bypass capacitor (C1) for all application circuit.
- 2) Recommend using 22uF tan capacitor MLCC capacitor to assure circuit stability.
- 3) Capacitor ESR range: $3m\Omega \sim 22\Omega$

Adjustable Output Voltage Version

LR1117S-ADJ provides a 1.25V reference voltage. Any output voltage between 1.25V~10V can be achievable by choosing two external resistors (schematic is shown below), R1 and R2



Application Circuit of LR1117S-ADJ

The output voltage of adjustable version follows the equation: Vout= $1.25 \times (1+R2/R1)+IAdj \times R2$. We can ignore IAdj because IAdj (about 50uA) is much less than the current of R1 (about 2~10mA).

Ver1.3 5/10



- 1) To meet the minimum load current (>10mA) requirement, R1 is recommended to be 125ohm or lower. As LR1117S-ADJ can keep itself stable at load current about 2mA, R1 is not allowed to be higher than 625ohm.
- 2) Using a bypass capacitor (C_{ADJ}) between the ADJ pin and ground can improve ripple rejection. This bypass capacitor prevents ripple from being amplified as the output voltage is increased. The impedance of C_{ADJ} should be less than R1 to prevent ripple from being amplified. As R1 is normally in the range of $100\Omega^{\sim}500\Omega$, the value of C_{ADJ} should satisfy this equation: $1/(2\pi x_{fripple} \times C_{ADJ}) < R1$.


THERMAL CONSIDERATIONS

We have to take heat dissipation into great consideration when output current or differential voltage of input and output voltage is large. Because in such cases, the power dissipation consumed by LR1117 is very large. LR1117 series uses SOT-223 package type and its thermal resistance is about 20°C/W. And the copper area of application board can affect the total thermal resistance. If copper area is 5cm*5cm (two sides), the resistance is about 30°C/W. So the total thermal resistance is about 20°C/W + 30°C/W. We can decrease total thermal resistance by increasing copper area in application board. When there is no good heat dissipation copper are in PCB, the total thermal resistance will be as high as 120°C/W, then the power dissipation of LR1117 could allow on itself is less than 1W. And furthermore, LR1117 will work at junction temperature higher than 125°C under such condition and no lifetime is guaranteed.


TYPICAL PERFORMANCE CHARACTERISTICS

T=25°C unless specified.


Line Regulation




Dropout Voltage



Load Regulation




Thermal performance with OTP




Ver1.3 6/10




PACKAGE OUTLINE

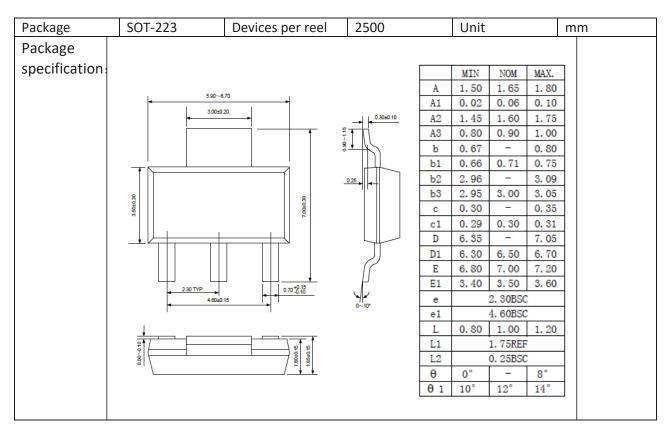


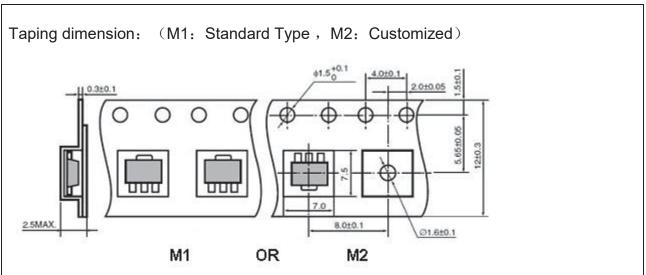

Ver1.3 7/10




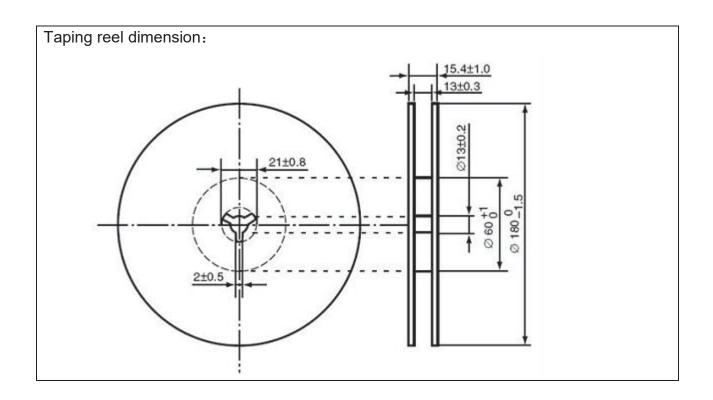


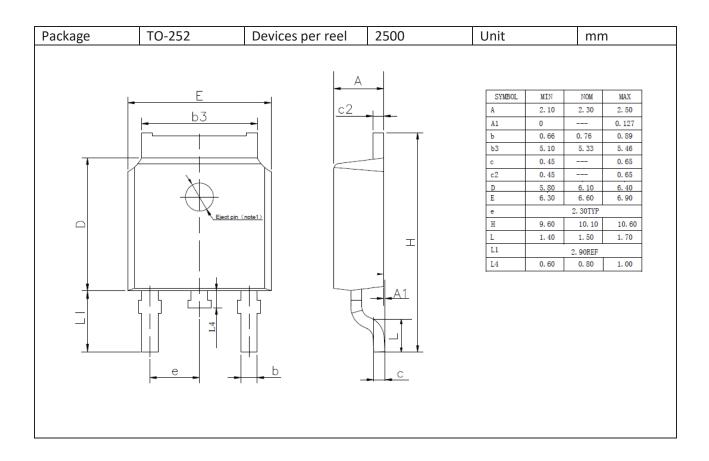

Ver1.3 8/10



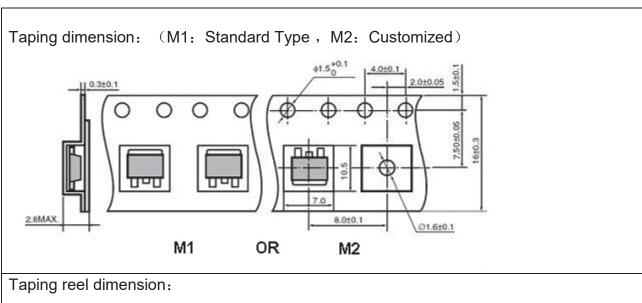

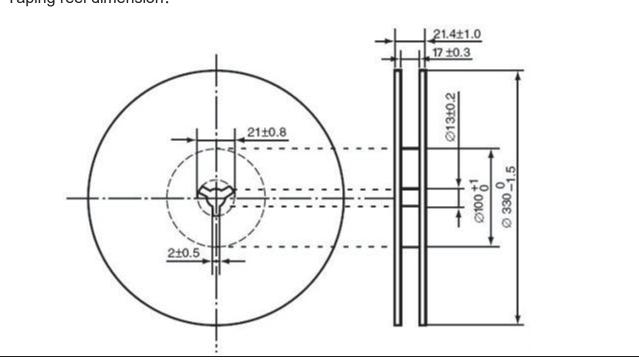

Ver1.3 9/10



Disclaimer

The product information and the selection guides facilitate the selection of LRC's best suited devices for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet the performance parameters for your application. The information furnished on LRC's Website, due to the constraint of time and certain conditions, may not be updated timely and is only for customer's reference. Therefore, LRC does not assume responsibility arising from inaccuracies or incomplete information. If necessary, customer is requested to contact LRC's service support for confirmation and accurate information. Furthermore, LRC does not assume liability whatsoever, arising out of the improper application or use of any LRC product; neither does it convey any license under its patent rights nor rights of other intellectual properties. LRC strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



No. 287 West People Road, Leshan, Sichuan, China. Telephone: + 86-833-2150227 Fax: + 86-833-2150003

Website: www.lrc.cn

E-mail: market@lrc.cn

Ver1.3 10/10