

DESCRIPTION

BL8065 is a three-terminal positive regulator with an output voltage of 5.0V and output current up to 150mA. The device features a typical output tolerance of $\pm 3\%$. And its input voltage can stand a voltage as high as 36V.

BL8065 includes high accuracy voltage reference, error amplifier, TSD circuit and output driver module.

BL8065 offers thermal shut down functions to assure the stability of chip and power system.

BL8065 is available in SOT89-3, TO-92 and TO-220 power packages.


FEATURES

- Maximum output current up to 150mA
- Output voltage tolerances of $\pm 3\%$ over the temperature range
- Internal thermal over-temperature protection
- High input voltage (up to 36V)
- Low Power Consumption: 100uA (Typ.)
- Available in plastic TO-92 and plastic TO-220 packages
- No external components

APPLICATIONS

- Battery Powered equipment
- Communication equipment
- Audio/Video equipment


TYPICAL APPLICATION

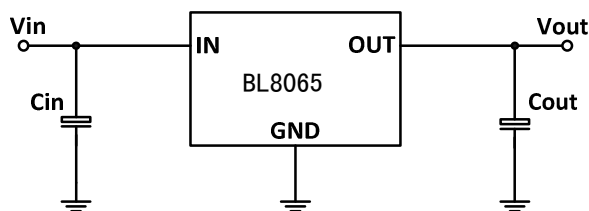

Note: Input capacitor ($C1=0.33\mu F$) and Output capacitor ($C2=0.1\mu F$) are recommended in all application circuit. Tantalum capacitor is recommended.

ELECTRICAL CHARACTERISTICS

Line Regulation

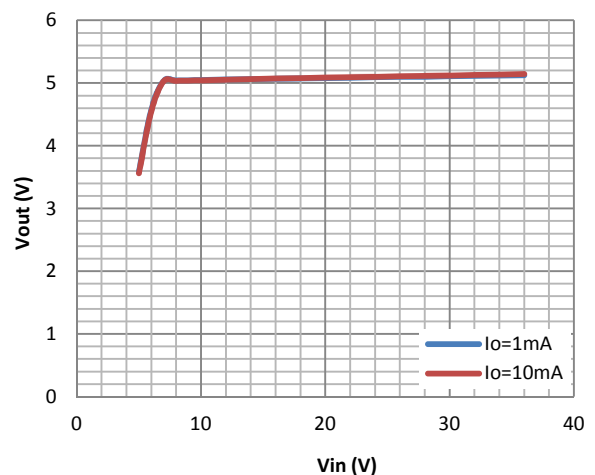



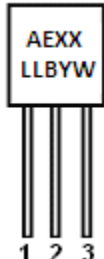
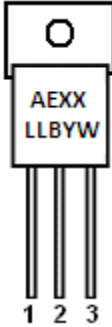
BL8065

ORDERING INFORMATION

BL8065 1 2 3 4 5

Code	Description
1	Temperature&Rohs: C:-40~85°C ,Pb Free Rohs Std.
2	Package type: C3:SOT-89-3 H:TO-92 N: TO220
3	Packing type: TR:Tape&Reel (Standard) BG:Bag (TO-92)
4	Output voltage: e.g. 33=3.3V 50=5.0V AD=Output adjustable
5	Voltage accuracy: 2=±2% Blank(default)=±3%

PIN CONFIGURATION

Product Classification		BL8065CC3TR□□
AEXX LLBYW	N: Product Code	SOT-89-3 
	XX: Output Voltage	
	LL: LOT NO.	
	B: FAB Code	
YW: Date Code		
Product Classification		BL8065CC3BTR□□
AEXX LLBYW	N: Product Code	SOT-89-3 
	XX: Output Voltage	
	LL: LOT NO.	
	B: FAB Code	
YW: Date Code		
Product Classification		BL8065CHBG□□
AEXX LLBYW	N: Product Code	TO-92 
	XX: Output Voltage	
	LL: LOT NO.	
	B: FAB Code	
YW: Date Code		
Product Classification		BL8065CNBG□□
AEXX LLBYW	N: Product Code	TO-220 
	XX: Output Voltage	
	LL: LOT NO.	
	B: FAB Code	
YW: Date Code		
GND	Ground	
IN	Supply Voltage Input	
OUT	Output Voltage	

ABSOLUTE MAXIMUM RATING

Parameter		Value
Max Input Voltage		40V
Max Output Current		150mA
Operating Junction Temperature(Tj)		150°C
Ambient Temperature(Ta)		-40°C –85°C
Power Dissipation	TO-92	0.5 W
	TO-220	1.0 W
	SOT-89-3	0.5W
Storage Temperature(Ts)		-40°C -150°C
Lead Temperature & Time		260°C, 10s

Note:

Exceed these limits may cause damage to the device.

Exposure to absolute maximum rating conditions may affect device reliability.

RECOMMENDED WORK CONDITIONS

Parameter	Value
Input Voltage Range	Max 36V
Operating Junction Temperature(Tj)	-20°C –85°C

ELECTRICAL CHARACTERISTICS

Test Conditions: $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$, $T_A=25^\circ C$, Unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Vin	Input Voltage				36	V
Vout	Output Voltage	1mA ≤ Iout ≤ 40mA 7V ≤ Vin ≤ 30V	4.85	5.0	5.15	V
		1mA ≤ Iout ≤ 40mA 5.3V ≤ Vin ≤ 30V	3.2	3.3	3.4	V
ΔVout	Line Regulation	7V ≤ Vin ≤ 30V	-	-	200	mV
ΔVout	Load Regulation	1mA ≤ Iout ≤ 100mA	-	-	150	mV
Iout(Max.)	Maximum Output Current	Vin - Vout = 1.5V	150			mA
Iq	Quiescent Current	Vin - Vout = 1.25V	-	0.1	0.15	mA
		ADJ version		10	20	uA
ΔV/ΔT	Temperature coefficient	Vin = 6.5V, 25°C ≤ Temp ≤ 85°C			±100	ppm
TSD	Over Temperature Protection	Vin = 6.5V, Iout = 1mA	150			°C
θ _{JC}	Thermal Resistor	TO-92		10		°C / W
		TO-220		4.5		
		SOT89-3		20		

Note: All test are conducted under ambient temperature 25°C and within a short period of time 20ms

BLOCK DIAGRAM

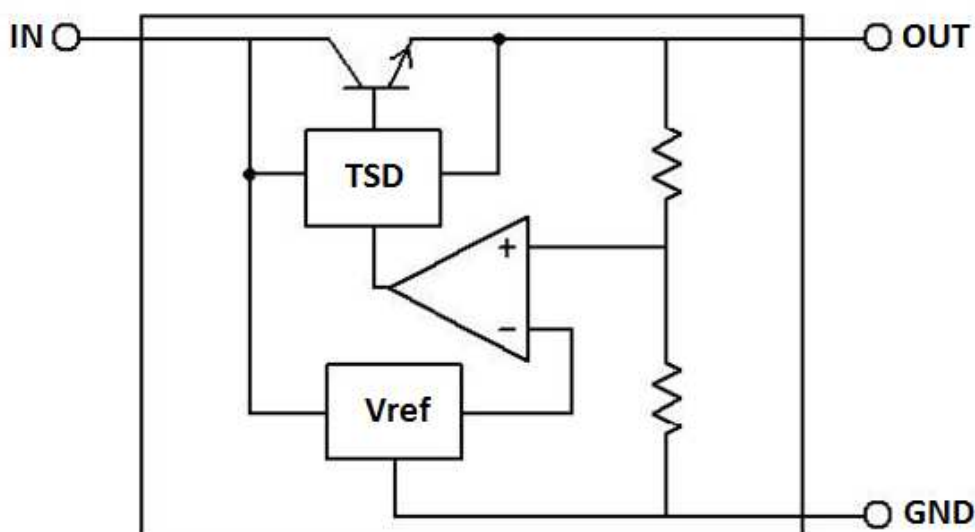


Fig.1 Block Diagram

EXPLANATION and THERMAL CONSIDERATION


BL8065 is a series of low dropout voltage and low power consumption regulator. Its application circuit is very simple, which only needs two outside capacitors.

We have to take heat dissipation into great consideration when voltage of input is high. Because in such cases, the power dissipation consumed by BL8065 is very large. BL8065 uses SOT-89-3 package type and its thermal resistance is about $20^{\circ}\text{C}/\text{W}$. And the copper area of application board can affect the total thermal resistance. If copper area is $5\text{cm} \times 5\text{cm}$ (two sides), the resistance is about $30^{\circ}\text{C}/\text{W}$. So the total thermal resistance is about $20^{\circ}\text{C}/\text{W} + 30^{\circ}\text{C}/\text{W}$. We can decrease total thermal resistance by increasing copper area in application board. When there is no good heat dissipation copper are in PCB, the total thermal resistance will be as high as $120^{\circ}\text{C}/\text{W}$, then the power dissipation of BL8065 could allow on itself is less than 1W. And furthermore, BL8065 will work at junction temperature higher than 125°C under such condition and no lifetime is guaranteed.


TYPICAL PERFORMANCE CHARACTERISTICS

($T=25^{\circ}\text{C}$ unless specified.)


Line Regulation

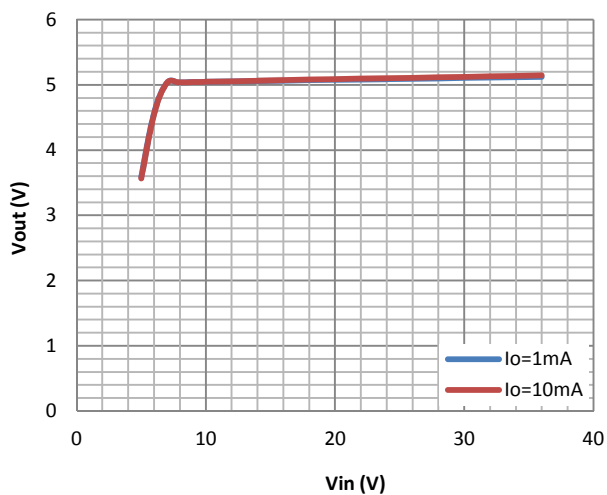


Load Regulation

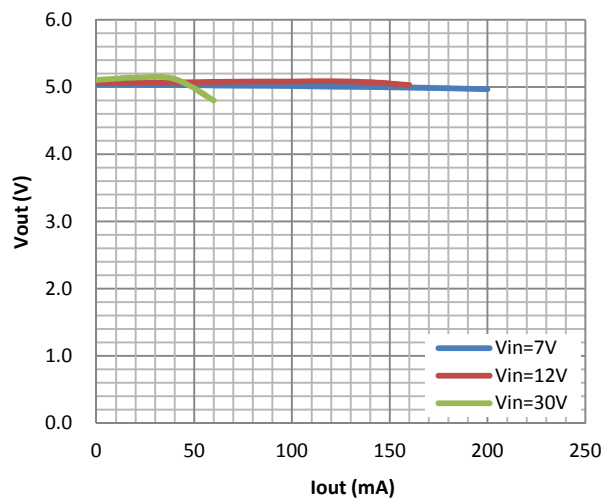

Temperature Coefficient

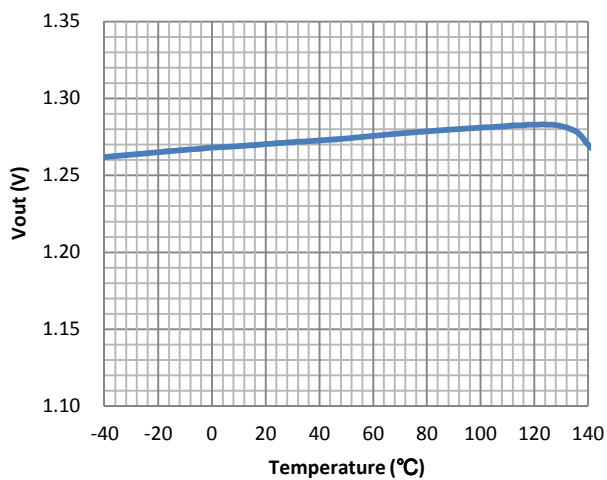

TSD (Thermal Shutdown)

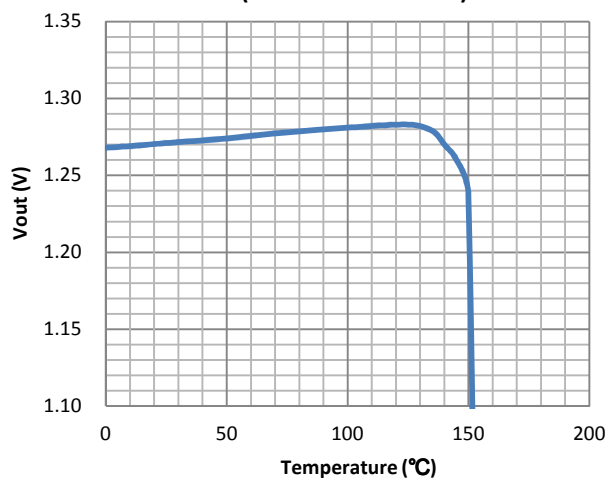

PACKAGE OUTLINE

Package	TO-92	Device per Box	1000	Unit	mm
Package specification:					
<p style="text-align: center;">DIMENSIONS ARE IN MILLIMETERS</p>					

Package	SOT-89-3	Devices per reel	1000	Unit	mm
Package specification:					

