# SR220 THRU SR2100

SCHOTTKY BARRIER RECT	TIFIER
REVERSE VOLTAGE:	20 to


FORWARD CURRENT:

## 20 to 100 VOLTS 2.0 AMPERE

http://www.njzrg.com

GROWC

ELECTRO

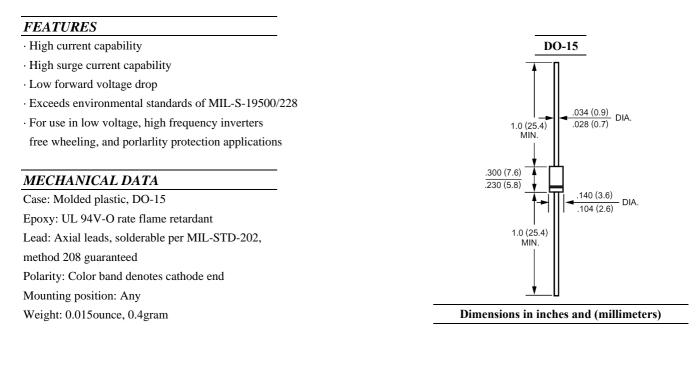

### Maximum Ratings and Electrical Characteristics

Ratings at 25 ambient temperature unless otherwise specified. Single phase, half wave,  $60H_Z$ , resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	SR220	SR230	SR240	SR250	SR260	SR280	SR2100	Units
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	50	60	80	100	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	35	42	56	70	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	30	40	50	60	80	100	Volts
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length	I <sub>(AV)</sub>	2.0							Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	50							Amp
Maximum Forward Voltage at 2.0A DC and 25	V <sub>F</sub>	0.55 0.70 0.85					85	Volts	
Maximum Reverse Currentat T_A=25at Rated DC Blocking VoltageT_A=100	I <sub>R</sub>	0.5 20							mAmp
Typical Junction Capacitance (Note 1)	CJ	180							pF
Typical Thermal Resistance (Note 2)	R <sub>0JA</sub>	45							/W
Operating Junction Temperature Range	TJ	-55 to +125 -55 to +150							
Storage Temperature Range	Tstg	-55 to +150							

#### NOTES:

1- Measured at 1  $\ensuremath{\text{MH}}_{Z}$  and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance From Junction to Ambient 0.375"(9.5mm) lead length P.C.B. Mounted

# **SR220 THRU SR2100** SCHOTTKY BARRIER RECTIFIER


### RATINGS AND CHARACTERISTIC CURVES


FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE


AVERAGE FORWARD CURRENT,(A) 2.4 2.0 1.6 1.2 0.8 0.4 0 40 180 20 60 140 160 80 100 120 200 0 AMBIENT TEMPERATURE,(°C)

SURGE CURRENT 50 PEAK FORWARD SURGE CURRENT,(A) 40 30 8.3m nale Hal Tj=25°C Sine Wave 20 JEDEC method 10 0 5 50 100 1 10 NUMBER OF CYCLES AT 60Hz

FIG.3-MAXIMUM NON-REPETITIVE FORWARD

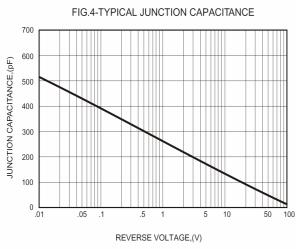

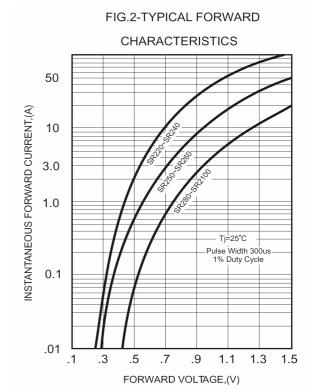

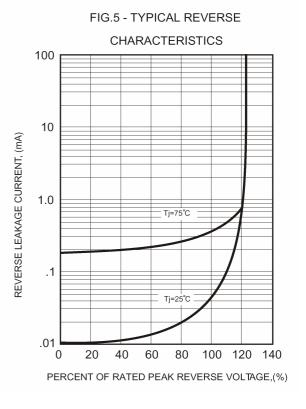

#### http://www.njzrg.com