

# MC74AC32, MC74ACT32

## Quad 2-Input OR Gate

- Outputs Source/Sink 24 mA
- 'ACT32 Has TTL Compatible Inputs

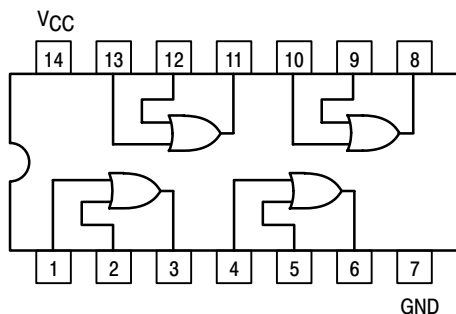


Figure 1. Pinout: 14-Lead Packages Conductors (Top View)

### MAXIMUM RATINGS\*


| Rating                                    | Symbol    | Value                  | Unit        |
|---|-----------|------------------------|-------------|
| DC Supply Voltage (Referenced to GND)     | $V_{CC}$  | -0.5 to +7.0           | V           |
| DC Input Voltage (Referenced to GND)      | $V_{in}$  | -0.5 to $V_{CC} + 0.5$ | V           |
| DC Output Voltage (Referenced to GND)     | $V_{out}$ | -0.5 to $V_{CC} + 0.5$ | V           |
| DC Input Current, per Pin                 | $I_{in}$  | $\pm 20$               | mA          |
| DC Output Sink/Source Current, per Pin    | $I_{out}$ | $\pm 50$               | mA          |
| DC $V_{CC}$ or GND Current per Output Pin | $I_{CC}$  | $\pm 50$               | mA          |
| Storage Temperature                       | $T_{stg}$ | -65 to +150            | $^{\circ}C$ |

\*Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the Recommended Operating Conditions.




ON Semiconductor™


<http://onsemi.com>




PDIP-14  
N SUFFIX  
CASE 646



SO-14  
D SUFFIX  
CASE 751A



TSSOP-14  
DT SUFFIX  
CASE 948G



EIAJ-14  
M SUFFIX  
CASE 965

### ORDERING INFORMATION

| Device        | Package  | Shipping         |
|---------------|----------|------------------|
| MC74AC32N     | PDIP-14  | 25 Units/Rail    |
| MC74ACT32N    | PDIP-14  | 25 Units/Rail    |
| MC74AC32D     | SOIC-14  | 55 Units/Rail    |
| MC74AC32DR2   | SOIC-14  | 2500 Tape & Reel |
| MC74ACT32D    | SOIC-14  | 55 Units/Rail    |
| MC74ACT32DR2  | SOIC-14  | 2500 Tape & Reel |
| MC74AC32DT    | TSSOP-14 | 96 Units/Rail    |
| MC74AC32DTR2  | TSSOP-14 | 2500 Tape & Reel |
| MC74ACT32DT   | TSSOP-14 | 96 Units/Rail    |
| MC74ACT32DTR2 | TSSOP-14 | 2500 Tape & Reel |
| MC74AC32M     | EIAJ-14  | 50 Units/Rail    |
| MC74AC32MEL   | EIAJ-14  | 2000 Tape & Reel |
| MC74ACT32M    | EIAJ-14  | 50 Units/Rail    |
| MC74ACT32MEL  | EIAJ-14  | 2000 Tape & Reel |

### DEVICE MARKING INFORMATION

See general marking information in the device marking section on page 93 of this data sheet.

# MC74AC32, MC74ACT32

## RECOMMENDED OPERATING CONDITIONS

| Symbol                             | Parameter   | Min                     | Typ | Max             | Unit |      |
|------------------------------------|---|-------------------------|-----|-----------------|------|------|
| V <sub>CC</sub>                    | Supply Voltage  | 'AC                     | 2.0 | 5.0             | 6.0  | V    |
|                                    |   | 'ACT                    | 4.5 | 5.0             | 5.5  |      |
| V <sub>in</sub> , V <sub>out</sub> | DC Input Voltage, Output Voltage (Ref. to GND)                          | 0                       | –   | V <sub>CC</sub> | V    |      |
| t <sub>r</sub> , t <sub>f</sub>    | Input Rise and Fall Time (Note 1)<br>'AC Devices except Schmitt Inputs  | V <sub>CC</sub> @ 3.0 V | –   | 150             | –    | ns/V |
|                                    |   | V <sub>CC</sub> @ 4.5 V | –   | 40              | –    |      |
|                                    |   | V <sub>CC</sub> @ 5.5 V | –   | 25              | –    |      |
| t <sub>r</sub> , t <sub>f</sub>    | Input Rise and Fall Time (Note 2)<br>'ACT Devices except Schmitt Inputs | V <sub>CC</sub> @ 4.5 V | –   | 10              | –    | ns/V |
|                                    |   | V <sub>CC</sub> @ 5.5 V | –   | 8.0             | –    |      |
| T <sub>J</sub>                     | Junction Temperature (PDIP)   | –                       | –   | 140             | °C   |      |
| T <sub>A</sub>                     | Operating Ambient Temperature Range                                     | –40                     | 25  | 85              | °C   |      |
| I <sub>OH</sub>                    | Output Current – High   | –                       | –   | –24             | mA   |      |
| I <sub>OL</sub>                    | Output Current – Low  | –                       | –   | 24              | mA   |      |

1. V<sub>in</sub> from 30% to 70% V<sub>CC</sub>; see individual Data Sheets for devices that differ from the typical input rise and fall times.
2. V<sub>in</sub> from 0.8 V to 2.0 V; see individual Data Sheets for devices that differ from the typical input rise and fall times.

## DC CHARACTERISTICS

| Symbol           | Parameter                         | V <sub>CC</sub><br>(V) | 74AC                   |                   | 74AC                            |    | Unit  | Conditions |
|------------------|-----------------------------------|------------------------|------------------------|-------------------|---------------------------------|----|---|------------|
|                  |                                   |                        | T <sub>A</sub> = +25°C |                   | T <sub>A</sub> = –40°C to +85°C |    |   |            |
|                  |                                   |                        | Typ                    | Guaranteed Limits |                                 |    |   |            |
| V <sub>IH</sub>  | Minimum High Level Input Voltage  | 3.0                    | 1.5                    | 2.1               | 2.1                             | V  | V <sub>OUT</sub> = 0.1 V<br>or V <sub>CC</sub> – 0.1 V  |            |
|                  |                                   | 4.5                    | 2.25                   | 3.15              | 3.15                            |    |   |            |
|                  |                                   | 5.5                    | 2.75                   | 3.85              | 3.85                            |    |   |            |
| V <sub>IL</sub>  | Maximum Low Level Input Voltage   | 3.0                    | 1.5                    | 0.9               | 0.9                             | V  | V <sub>OUT</sub> = 0.1 V<br>or V <sub>CC</sub> – 0.1 V  |            |
|                  |                                   | 4.5                    | 2.25                   | 1.35              | 1.35                            |    |   |            |
|                  |                                   | 5.5                    | 2.75                   | 1.65              | 1.65                            |    |   |            |
| V <sub>OH</sub>  | Minimum High Level Output Voltage | 3.0                    | 2.99                   | 2.9               | 2.9                             | V  | I <sub>OUT</sub> = –50 μA   |            |
|                  |                                   | 4.5                    | 4.49                   | 4.4               | 4.4                             |    |   |            |
|                  |                                   | 5.5                    | 5.49                   | 5.4               | 5.4                             |    |   |            |
|                  |                                   | 3.0                    | –                      | 2.56              | 2.46                            | V  | *V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>–12 mA<br>I <sub>OH</sub> –24 mA<br>–24 mA |            |
|                  |                                   | 4.5                    | –                      | 3.86              | 3.76                            |    |   |            |
|                  |                                   | 5.5                    | –                      | 4.86              | 4.76                            |    |   |            |
| V <sub>OL</sub>  | Maximum Low Level Output Voltage  | 3.0                    | 0.002                  | 0.1               | 0.1                             | V  | I <sub>OUT</sub> = 50 μA  |            |
|                  |                                   | 4.5                    | 0.001                  | 0.1               | 0.1                             |    |   |            |
|                  |                                   | 5.5                    | 0.001                  | 0.1               | 0.1                             |    |   |            |
|                  |                                   | 3.0                    | –                      | 0.36              | 0.44                            | V  | *V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>12 mA<br>I <sub>OL</sub> 24 mA<br>24 mA    |            |
|                  |                                   | 4.5                    | –                      | 0.36              | 0.44                            |    |   |            |
|                  |                                   | 5.5                    | –                      | 0.36              | 0.44                            |    |   |            |
| I <sub>IN</sub>  | Maximum Input Leakage Current     | 5.5                    | –                      | ±0.1              | ±1.0                            | μA | V <sub>I</sub> = V <sub>CC</sub> , GND  |            |
| I <sub>OLD</sub> | †Minimum Dynamic Output Current   | 5.5                    | –                      | –                 | 75                              | mA | V <sub>OLD</sub> = 1.65 V Max   |            |
| I <sub>OHD</sub> |                                   | 5.5                    | –                      | –                 | –75                             | mA | V <sub>OHD</sub> = 3.85 V Min   |            |
| I <sub>CC</sub>  | Maximum Quiescent Supply Current  | 5.5                    | –                      | 4.0               | 40                              | μA | V <sub>IN</sub> = V <sub>CC</sub> or GND  |            |

\*All outputs loaded; thresholds on input associated with output under test.

†Maximum test duration 2.0 ms, one output loaded at a time.

NOTE: I<sub>IN</sub> and I<sub>CC</sub> @ 3.0 V are guaranteed to be less than or equal to the respective limit @ 5.5 V V<sub>CC</sub>.

# MC74AC32, MC74ACT32

## AC CHARACTERISTICS (For Figures and Waveforms – See Section 3 of the ON Semiconductor FACT Data Book, DL138/D)

| Symbol           | Parameter         | V <sub>CC</sub> *<br>(V) | 74AC   |            |            | 74AC   |             | Unit | Fig. No. |
|------------------|-------------------|--------------------------|--|------------|------------|--|-------------|------|----------|
|                  |                   |                          | T <sub>A</sub> = +25°C<br>C <sub>L</sub> = 50 pF |            |            | T <sub>A</sub> = –40°C<br>to +85°C<br>C <sub>L</sub> = 50 pF |             |      |          |
|                  |                   |                          | Min  | Typ        | Max        | Min  | Max         |      |          |
| t <sub>PLH</sub> | Propagation Delay | 3.3<br>5.0               | 1.5<br>1.5                                       | 7.0<br>5.5 | 9.0<br>7.5 | 1.5<br>1.0   | 10.0<br>8.5 | ns   | 3–5      |
| t <sub>PHL</sub> | Propagation Delay | 3.3<br>5.0               | 1.5<br>1.5                                       | 7.0<br>5.0 | 8.5<br>7.0 | 1.0<br>1.0   | 9.0<br>7.5  | ns   | 3–5      |

\*Voltage Range 3.3 V is 3.3 V ±0.3 V.  
Voltage Range 5.0 V is 5.0 V ±0.5 V.

## DC CHARACTERISTICS

| Symbol             | Parameter                              | V <sub>CC</sub><br>(V) | 74ACT                  |                   | 74ACT                                 |                   | Unit  | Conditions |
|--------------------|--|------------------------|------------------------|-------------------|---------------------------------------|-------------------|---|------------|
|                    |  |                        | T <sub>A</sub> = +25°C |                   | T <sub>A</sub> =<br>–40°C to<br>+85°C |                   |   |            |
|                    |  |                        | Typ                    | Guaranteed Limits | Typ                                   | Guaranteed Limits |   |            |
| V <sub>IH</sub>    | Minimum High Level<br>Input Voltage    | 4.5                    | 1.5                    | 2.0               | 2.0                                   | V                 | V <sub>OUT</sub> = 0.1 V<br>or V <sub>CC</sub> – 0.1 V                                    |            |
|                    |  | 5.5                    | 1.5                    | 2.0               | 2.0                                   |                   |   |            |
| V <sub>IL</sub>    | Maximum Low Level<br>Input Voltage     | 4.5                    | 1.5                    | 0.8               | 0.8                                   | V                 | V <sub>OUT</sub> = 0.1 V<br>or V <sub>CC</sub> – 0.1 V                                    |            |
|                    |  | 5.5                    | 1.5                    | 0.8               | 0.8                                   |                   |   |            |
| V <sub>OH</sub>    | Minimum High Level<br>Output Voltage   | 4.5                    | 4.49                   | 4.4               | 4.4                                   | V                 | I <sub>OUT</sub> = –50 μA   |            |
|                    |  | 5.5                    | 5.49                   | 5.4               | 5.4                                   |                   |   |            |
|                    |  | 4.5                    | –                      | 3.86              | 3.76                                  | V                 | *V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>–24 mA<br>I <sub>OH</sub> –24 mA |            |
|                    |  | 5.5                    | –                      | 4.86              | 4.76                                  |                   |   |            |
| V <sub>OL</sub>    | Maximum Low Level<br>Output Voltage    | 4.5                    | 0.001                  | 0.1               | 0.1                                   | V                 | I <sub>OUT</sub> = 50 μA  |            |
|                    |  | 5.5                    | 0.001                  | 0.1               | 0.1                                   |                   |   |            |
|                    |  | 4.5                    | –                      | 0.36              | 0.44                                  | V                 | *V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>24 mA<br>I <sub>OL</sub> 24 mA   |            |
|                    |  | 5.5                    | –                      | 0.36              | 0.44                                  |                   |   |            |
| I <sub>IN</sub>    | Maximum Input<br>Leakage Current       | 5.5                    | –                      | ±0.1              | ±1.0                                  | μA                | V <sub>I</sub> = V <sub>CC</sub> , GND  |            |
| ΔI <sub>CCCT</sub> | Additional Max. I <sub>CC</sub> /Input | 5.5                    | 0.6                    | –                 | 1.5                                   | mA                | V <sub>I</sub> = V <sub>CC</sub> – 2.1 V  |            |
| I <sub>OLD</sub>   | †Minimum Dynamic<br>Output Current     | 5.5                    | –                      | –                 | 75                                    | mA                | V <sub>OLD</sub> = 1.65 V Max   |            |
| I <sub>OHD</sub>   |  | 5.5                    | –                      | –                 | –75                                   | mA                | V <sub>OHD</sub> = 3.85 V Min   |            |
| I <sub>CC</sub>    | Maximum Quiescent<br>Supply Current    | 5.5                    | –                      | 4.0               | 40                                    | μA                | V <sub>IN</sub> = V <sub>CC</sub> or GND  |            |

\*All outputs loaded; thresholds on input associated with output under test.

†Maximum test duration 2.0 ms, one output loaded at a time.

## MC74AC32, MC74ACT32

**AC CHARACTERISTICS** (For Figures and Waveforms – See Section 3 of the ON Semiconductor FACT Data Book, DL138/D)

| Symbol           | Parameter         | V <sub>CC</sub> *<br>(V) | 74ACT  |     |     | 74ACT  |      | Unit | Fig. No. |
|------------------|-------------------|--------------------------|--|-----|-----|--|------|------|----------|
|                  |                   |                          | T <sub>A</sub> = +25°C<br>C <sub>L</sub> = 50 pF |     |     | T <sub>A</sub> = -40°C<br>to +85°C<br>C <sub>L</sub> = 50 pF |      |      |          |
|                  |                   |                          | Min  | Typ | Max | Min  | Max  |      |          |
| t <sub>PLH</sub> | Propagation Delay | 5.0                      | 1.0  | –   | 9.0 | 1.0  | 10.0 | ns   | 3–6      |
| t <sub>PHL</sub> | Propagation Delay | 5.0                      | 1.0  | –   | 9.0 | 1.0  | 10.0 | ns   | 3–6      |







\*Voltage Range 5.0 V is 5.0 V ±0.5 V.

### CAPACITANCE

| Symbol          | Parameter                     | Value<br>Typ | Unit | Test Conditions         |
|-----------------|-------------------------------|--------------|------|-------------------------|
| C <sub>IN</sub> | Input Capacitance             | 4.5          | pF   | V <sub>CC</sub> = 5.0 V |
| C <sub>PD</sub> | Power Dissipation Capacitance | 20           | pF   | V <sub>CC</sub> = 5.0 V |

# MC74AC32, MC74ACT32

## MARKING DIAGRAMS



A = Assembly Location  
WL, L = Wafer Lot  
YY, Y = Year  
WW, W = Work Week