



SANYO Semiconductors

DATA SHEET

NPN Epitaxial Planar Silicon Transistor

80GN01F — UHF Wide-band Low-noise Amplifier Applications

Features

- High cut-off frequency : $f_T = 8.0\text{GHz}$ typ.
- High gain : $|S_{21e}|^2 = 12.0\text{dB}$ typ ($f = 1\text{GHz}$).
- Ultrasmall package permitting applied sets to be small and slim.

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CB0}		11	V
Collector-to-Emitter Voltage	V_{CEO}		5.5	V
Emitter-to-Base Voltage	V_{EBO}		2	V
Collector Current	I_C		80	mA
Collector Dissipation	P_C		250	mW
Junction Temperature	T_J		150	$^\circ\text{C}$
Storage Temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CB0}	$V_{CB} = 10\text{V}, I_E = 0$			0.1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 1\text{V}, I_C = 0$			1	μA
DC Current Gain	h_{FE}	$V_{CE} = 3\text{V}, I_C = 10\text{mA}$	100		160	
Gain-Bandwidth Product	f_T1	$V_{CE} = 1\text{V}, I_C = 5\text{mA}$		4.5		GHz
	f_T2	$V_{CE} = 3\text{V}, I_C = 30\text{mA}$	6.0	8.0		GHz
Output Capacitance	C_{ob}	$V_{CB} = 1\text{V}, f = 1\text{MHz}$		1.25	1.55	pF
Reverse Transfer Capacitance	C_{re}	$V_{CB} = 1\text{V}, f = 1\text{MHz}$		0.9		pF
Forward Transfer Gain	$ S_{21e} ^2 1$	$V_{CE} = 1\text{V}, I_C = 5\text{mA}, f = 1\text{GHz}$		9.0		dB
	$ S_{21e} ^2 2$	$V_{CE} = 3\text{V}, I_C = 30\text{mA}, f = 1\text{GHz}$	9.5	12.0		dB
Noise Figure	NF	$V_{CE} = 3\text{V}, I_C = 5\text{mA}, f = 1\text{GHz}$		1.2	1.9	dB

Marking : ZF

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.






SANYO Electric Co., Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN








Package Dimensions

unit : mm

2159A

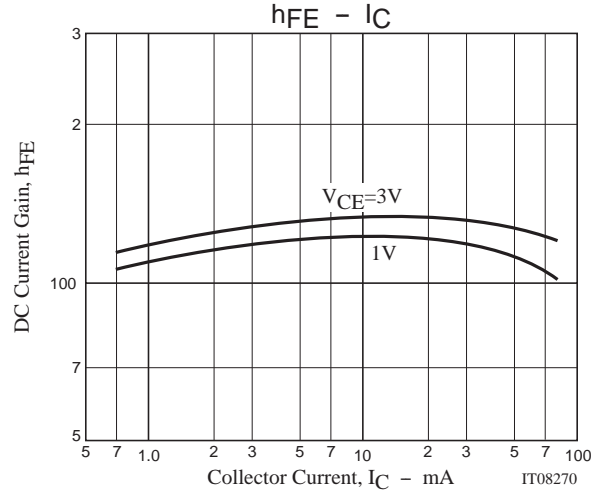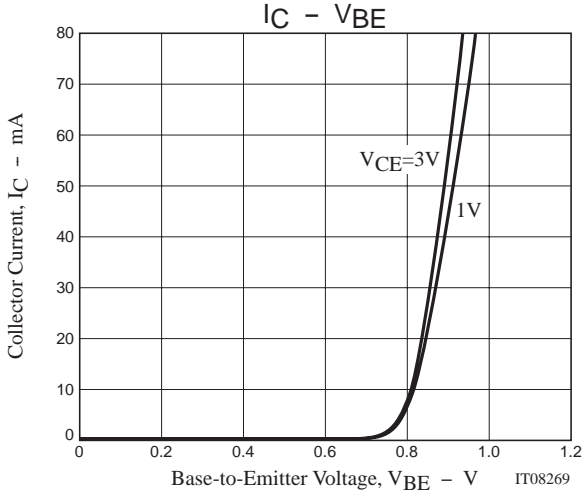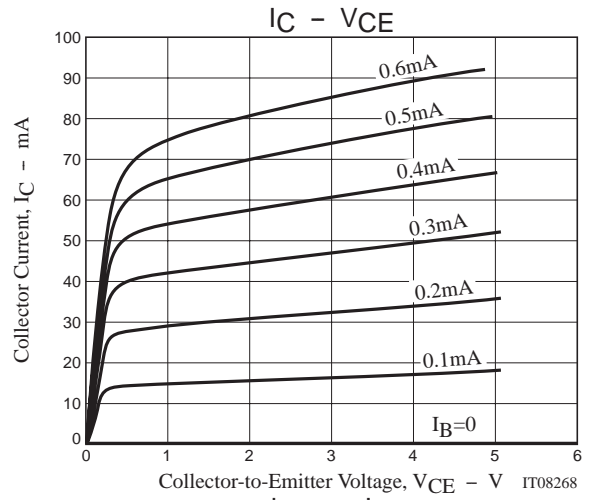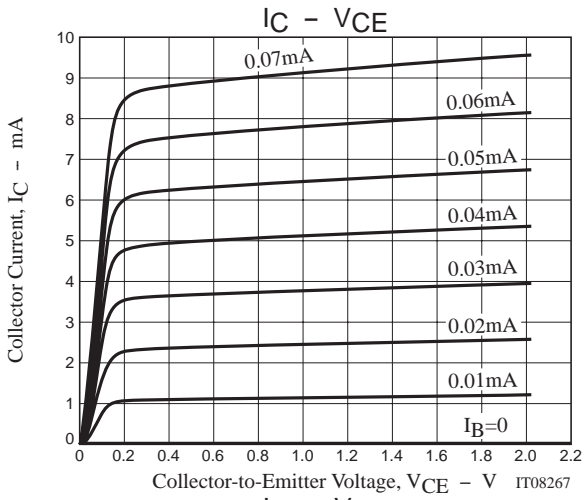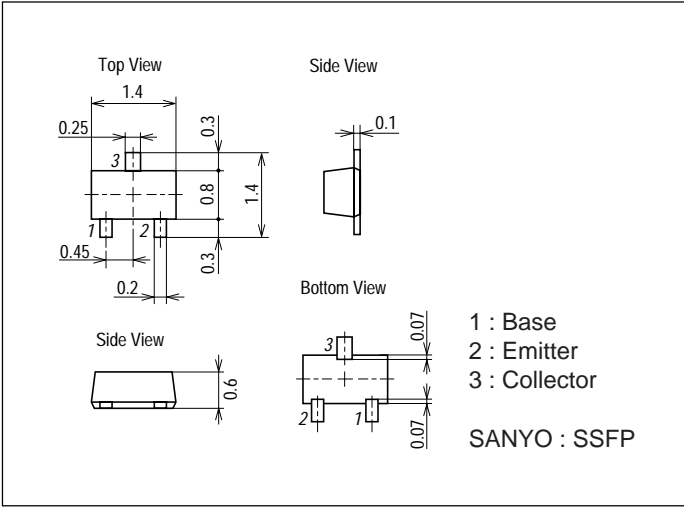

80GN01F

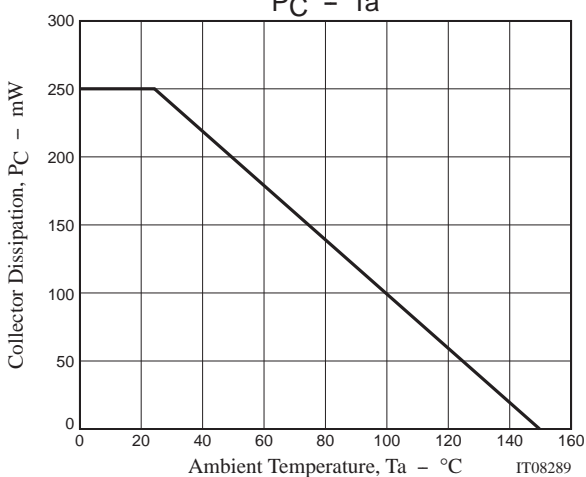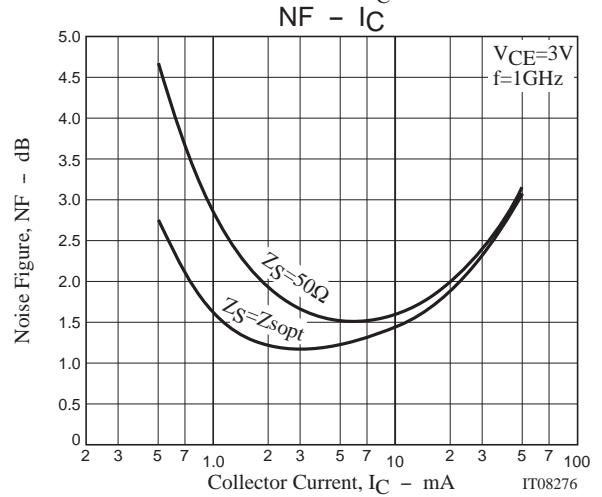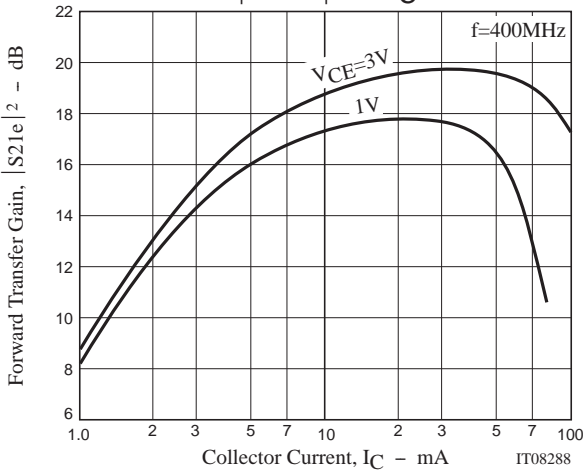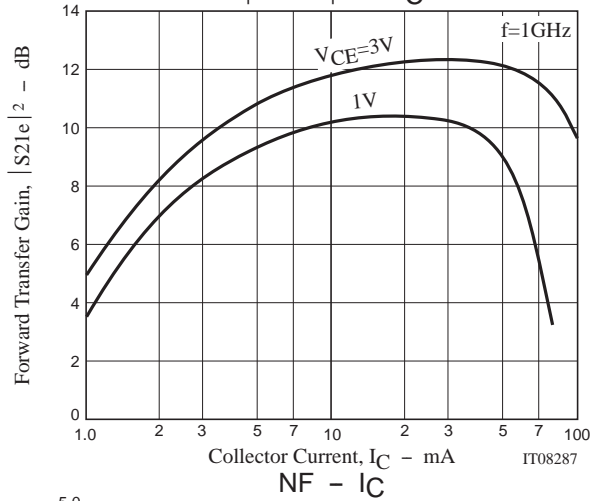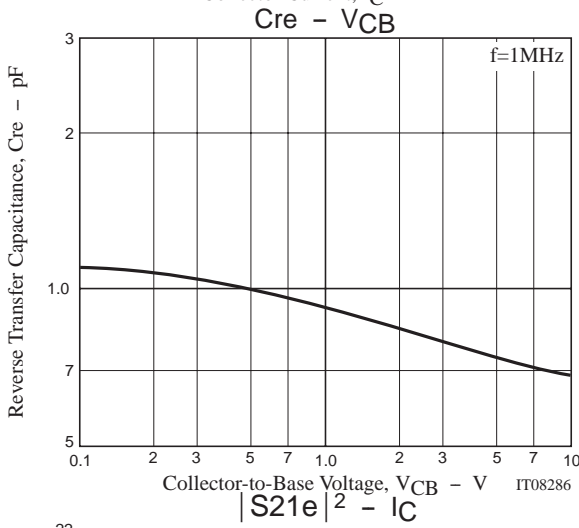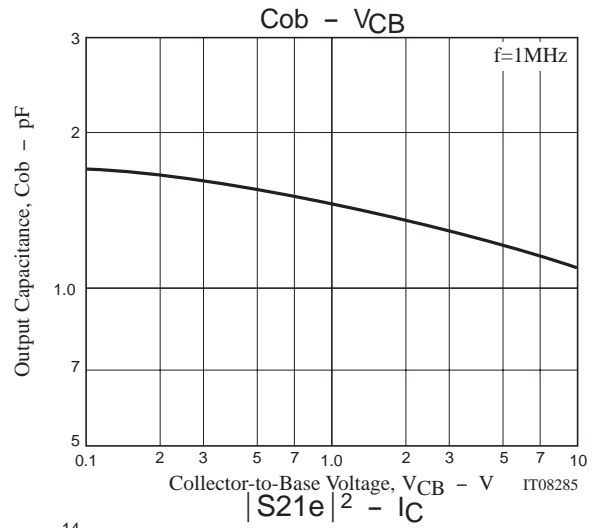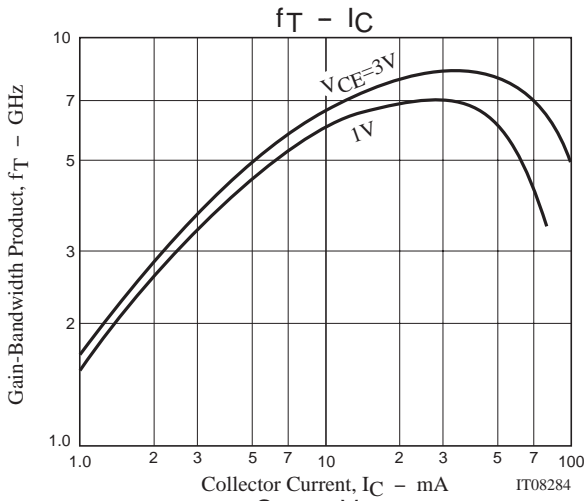

80GN01F

S Parameters (Common emitter)

$V_{CE}=1V, I_C=1mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.951	-21.08	3.299	163.78	0.063	76.46	0.973	-12.38
200	0.916	-40.47	3.121	148.94	0.116	62.93	0.910	-23.34
400	0.836	-72.71	2.566	124.82	0.187	43.76	0.752	-39.56
600	0.777	-95.67	2.092	107.29	0.217	30.30	0.620	-50.06
800	0.747	-113.28	1.748	93.51	0.229	22.09	0.532	-57.21
1000	0.712	-126.06	1.490	82.55	0.232	15.92	0.473	-62.89
1200	0.697	-135.56	1.293	73.59	0.228	12.19	0.438	-68.33
1400	0.698	-143.83	1.156	65.46	0.224	9.14	0.413	-74.15
1600	0.689	-150.89	1.044	58.63	0.214	7.18	0.403	-79.24
1800	0.685	-157.17	0.962	52.59	0.204	6.42	0.402	-84.17
2000	0.680	-162.55	0.898	47.40	0.197	7.15	0.414	-89.45

$V_{CE}=1V, I_C=3mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.887	-33.08	8.146	158.07	0.059	72.56	0.934	-22.83
200	0.833	-61.40	7.208	139.94	0.102	56.62	0.816	-41.05
400	0.739	-101.14	5.184	115.42	0.144	38.27	0.606	-65.15
600	0.694	-123.94	3.907	100.51	0.158	30.57	0.487	-79.23
800	0.676	-139.75	3.112	89.46	0.168	26.92	0.423	-88.13
1000	0.650	-149.86	2.563	81.23	0.171	26.01	0.388	-93.80
1200	0.638	-157.36	2.199	74.39	0.175	25.56	0.373	-98.65
1400	0.635	-163.73	1.946	67.94	0.181	25.82	0.365	-102.71
1600	0.628	-168.85	1.731	62.15	0.183	27.05	0.361	-105.82
1800	0.618	-173.18	1.576	57.01	0.187	28.65	0.356	-107.74
2000	0.612	-177.41	1.455	52.15	0.194	31.19	0.367	-109.84

$V_{CE}=1V, I_C=5mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.833	-43.47	11.917	152.48	0.056	66.29	0.892	-30.79
200	0.765	-77.90	9.731	132.28	0.089	50.48	0.728	-53.54
400	0.684	-118.38	6.347	108.79	0.118	36.52	0.507	-80.66
600	0.654	-138.23	4.584	95.87	0.129	32.77	0.407	-95.83
800	0.646	-151.87	3.591	86.26	0.138	32.86	0.363	-104.59
1000	0.625	-160.07	2.931	79.38	0.144	33.34	0.334	-111.02
1200	0.615	-165.83	2.492	73.40	0.155	34.96	0.326	-114.91
1400	0.614	-171.12	2.191	67.66	0.166	36.26	0.321	-118.59
1600	0.605	-175.45	1.947	62.26	0.173	37.06	0.316	-121.74
1800	0.597	-179.31	1.765	57.64	0.183	38.72	0.314	-123.44
2000	0.594	177.13	1.625	53.23	0.196	40.41	0.320	-125.12

$V_{CE}=1V, I_C=10mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.745	-61.60	17.290	143.80	0.050	59.63	0.816	-43.71
200	0.685	-100.72	12.561	122.27	0.073	46.85	0.609	-70.97
400	0.640	-137.34	7.371	101.83	0.092	38.86	0.418	-101.09
600	0.628	-152.73	5.162	91.11	0.103	39.27	0.354	-116.59
800	0.627	-163.50	3.967	83.13	0.115	42.21	0.325	-125.42
1000	0.612	-169.72	3.223	77.21	0.127	43.43	0.309	-130.96
1200	0.603	-174.04	2.737	72.18	0.142	46.05	0.306	-134.39
1400	0.601	-178.40	2.402	67.08	0.158	46.64	0.307	-137.21
1600	0.594	178.13	2.128	62.32	0.172	47.33	0.302	-140.00
1800	0.586	174.66	1.924	58.09	0.189	47.48	0.300	-141.53
2000	0.583	171.86	1.770	53.93	0.204	48.36	0.301	-142.27

80GN01F

S Parameters (Common emitter)

$V_{CE}=1V, I_C=15mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.694	-73.54	20.028	138.70	0.045	56.21	0.761	-51.78
200	0.652	-113.12	13.614	117.38	0.064	44.94	0.550	-81.22
400	0.629	-145.93	7.680	98.75	0.080	41.51	0.389	-111.73
600	0.623	-159.13	5.320	89.06	0.093	43.15	0.341	-126.57
800	0.625	-168.31	4.076	81.61	0.107	47.17	0.322	-134.76
1000	0.609	-173.87	3.300	76.40	0.123	49.07	0.313	-139.47
1200	0.604	-177.57	2.794	71.44	0.140	50.17	0.309	-142.80
1400	0.601	178.38	2.459	66.62	0.159	51.44	0.312	-145.26
1600	0.595	175.28	2.174	61.87	0.174	50.62	0.307	-147.89
1800	0.584	172.19	1.971	57.86	0.191	51.21	0.304	-149.33
2000	0.580	169.42	1.810	53.84	0.212	51.38	0.305	-149.81

$V_{CE}=1V, I_C=20mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.661	-82.03	21.490	135.41	0.042	56.62	0.723	-57.16
200	0.639	-120.91	14.055	114.48	0.059	44.74	0.516	-87.85
400	0.627	-150.96	7.763	97.03	0.075	44.08	0.373	-118.40
600	0.625	-162.71	5.350	87.97	0.089	46.81	0.338	-132.46
800	0.627	-171.17	4.083	80.82	0.105	49.27	0.325	-140.13
1000	0.613	-176.10	3.310	75.60	0.122	50.83	0.314	-144.51
1200	0.604	-179.68	2.811	70.86	0.140	53.02	0.314	-147.49
1400	0.604	176.69	2.468	66.14	0.160	53.21	0.316	-149.90
1600	0.598	173.73	2.186	61.51	0.175	52.44	0.311	-152.29
1800	0.587	170.52	1.973	57.55	0.193	52.61	0.308	-153.64
2000	0.583	168.16	1.814	53.69	0.214	52.70	0.308	-154.41

$V_{CE}=1V, I_C=30mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.629	-94.03	22.573	131.03	0.041	53.61	0.669	-64.78
200	0.631	-130.83	14.133	111.06	0.054	44.99	0.475	-96.75
400	0.633	-156.83	7.648	94.87	0.070	45.04	0.362	-126.54
600	0.634	-166.94	5.247	86.52	0.084	49.75	0.336	-139.59
800	0.636	-174.46	3.999	79.55	0.103	53.04	0.326	-146.10
1000	0.624	-178.90	3.235	74.61	0.121	54.58	0.320	-150.35
1200	0.616	178.03	2.746	70.22	0.139	55.50	0.320	-152.26
1400	0.612	174.64	2.416	65.45	0.160	55.93	0.323	-154.43
1600	0.608	171.94	2.136	60.82	0.178	54.91	0.321	-156.67
1800	0.596	168.95	1.932	56.99	0.196	54.53	0.315	-158.07
2000	0.593	166.50	1.783	53.25	0.217	54.30	0.316	-158.64

$V_{CE}=1V, I_C=50mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.612	-113.23	20.943	125.22	0.039	48.99	0.572	-77.64
200	0.653	-144.23	12.513	106.64	0.051	43.41	0.425	-111.25
400	0.666	-164.52	6.637	91.92	0.065	47.96	0.354	-138.96
600	0.669	-172.53	4.549	83.79	0.083	52.17	0.344	-149.39
800	0.674	-179.11	3.467	77.09	0.102	55.82	0.339	-154.48
1000	0.660	177.25	2.796	72.00	0.120	56.22	0.337	-157.91
1200	0.651	174.33	2.379	67.29	0.141	57.34	0.337	-159.61
1400	0.649	171.16	2.103	62.54	0.161	56.71	0.340	-160.82
1600	0.641	168.43	1.858	57.91	0.179	56.23	0.338	-162.81
1800	0.633	165.42	1.691	53.92	0.201	55.06	0.335	-164.27
2000	0.629	163.18	1.556	49.96	0.223	54.54	0.334	-164.77

80GN01F

S Parameters (Common emitter)

$V_{CE}=3V, I_C=1mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.963	-17.25	3.224	167.07	0.049	78.35	0.986	-9.73
200	0.946	-33.94	3.093	154.75	0.094	68.58	0.953	-18.79
400	0.893	-63.42	2.718	133.44	0.163	51.63	0.857	-33.73
600	0.848	-86.17	2.327	116.44	0.200	38.03	0.766	-44.50
800	0.817	-104.76	2.019	102.54	0.217	28.98	0.702	-52.38
1000	0.775	-118.95	1.758	90.99	0.224	22.25	0.659	-57.95
1200	0.751	-129.33	1.562	81.52	0.223	17.81	0.636	-62.74
1400	0.742	-138.92	1.404	72.89	0.223	14.02	0.623	-66.98
1600	0.727	-146.55	1.267	65.46	0.213	11.22	0.616	-70.24
1800	0.713	-153.44	1.168	58.86	0.204	10.12	0.615	-73.55
2000	0.706	-159.56	1.091	53.04	0.193	11.38	0.626	-76.85

$V_{CE}=3V, I_C=3mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.901	-27.84	8.349	161.00	0.046	74.90	0.956	-17.94
200	0.854	-52.73	7.553	144.81	0.083	60.50	0.859	-33.29
400	0.763	-90.38	5.759	121.03	0.125	43.28	0.670	-54.09
600	0.706	-114.14	4.451	105.77	0.142	34.83	0.548	-66.28
800	0.681	-131.31	3.595	94.40	0.150	31.59	0.482	-73.62
1000	0.649	-142.59	2.981	85.92	0.153	29.58	0.441	-78.81
1200	0.633	-150.52	2.565	78.84	0.158	29.36	0.423	-82.29
1400	0.627	-157.72	2.265	72.25	0.164	29.65	0.409	-86.10
1600	0.618	-163.39	2.012	66.40	0.166	30.36	0.403	-88.42
1800	0.607	-168.44	1.829	61.16	0.170	32.65	0.401	-90.06
2000	0.604	-172.85	1.685	56.29	0.176	35.23	0.407	-92.41

$V_{CE}=3V, I_C=5mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.851	-35.91	12.127	156.52	0.045	70.66	0.922	-24.07
200	0.785	-66.14	10.421	137.86	0.076	55.55	0.786	-42.71
400	0.690	-106.26	7.237	114.13	0.105	42.17	0.569	-65.88
600	0.648	-128.08	5.348	100.41	0.118	36.91	0.455	-78.68
800	0.630	-142.96	4.207	90.50	0.126	36.00	0.397	-86.10
1000	0.607	-152.62	3.460	83.14	0.132	36.32	0.364	-90.95
1200	0.595	-159.10	2.937	77.13	0.141	37.50	0.350	-94.61
1400	0.591	-165.14	2.584	71.38	0.151	39.28	0.341	-97.93
1600	0.584	-170.03	2.292	65.96	0.158	40.36	0.334	-99.90
1800	0.575	-174.29	2.066	61.26	0.169	41.96	0.332	-101.46
2000	0.571	-178.01	1.905	56.90	0.182	43.19	0.339	-102.59

$V_{CE}=3V, I_C=10mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.768	-49.86	18.146	149.04	0.040	65.68	0.864	-34.10
200	0.691	-86.05	14.036	128.21	0.062	52.28	0.671	-56.89
400	0.619	-125.13	8.699	106.45	0.083	43.45	0.454	-82.20
600	0.597	-143.23	6.165	95.05	0.096	41.69	0.366	-95.60
800	0.590	-155.50	4.776	86.58	0.106	43.76	0.324	-103.40
1000	0.573	-162.59	3.875	80.60	0.118	46.04	0.304	-108.32
1200	0.565	-167.91	3.280	75.47	0.130	48.54	0.294	-110.93
1400	0.565	-172.37	2.881	70.23	0.147	49.88	0.291	-114.32
1600	0.557	-176.33	2.544	65.52	0.159	49.78	0.286	-116.09
1800	0.550	-179.99	2.297	61.27	0.175	50.60	0.283	-117.11
2000	0.547	-177.05	2.109	57.27	0.189	51.41	0.284	-117.42

80GN01F

S Parameters (Common emitter)

$V_{CE}=3V, I_C=15mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.716	-59.04	21.543	144.46	0.037	64.10	0.820	-39.99
200	0.646	-97.24	15.653	123.33	0.056	50.22	0.610	-64.53
400	0.593	-134.29	9.241	103.15	0.074	44.35	0.407	-90.95
600	0.580	-150.00	6.478	92.78	0.086	46.75	0.334	-104.42
800	0.578	-160.58	4.978	85.05	0.100	48.97	0.303	-111.90
1000	0.563	-166.96	4.026	79.61	0.113	51.61	0.286	-116.65
1200	0.555	-171.21	3.416	74.71	0.128	52.84	0.280	-119.23
1400	0.555	-175.47	2.987	69.90	0.145	52.83	0.279	-121.87
1600	0.549	-179.13	2.639	65.31	0.161	53.99	0.273	-123.80
1800	0.539	177.73	2.381	61.25	0.176	54.14	0.267	-124.72
2000	0.538	174.90	2.181	57.48	0.192	54.50	0.270	-124.94

$V_{CE}=3V, I_C=20mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.682	-65.23	23.468	141.70	0.038	60.66	0.789	-43.88
200	0.621	-104.29	16.461	120.57	0.053	49.62	0.573	-69.29
400	0.583	-139.21	9.493	101.37	0.069	46.37	0.381	-96.01
600	0.573	-153.40	6.603	91.57	0.083	48.97	0.317	-109.23
800	0.572	-163.46	5.057	84.22	0.097	51.47	0.291	-116.97
1000	0.560	-169.22	4.091	78.96	0.112	53.82	0.275	-121.73
1200	0.551	-173.23	3.470	74.16	0.128	55.31	0.274	-123.33
1400	0.553	-177.26	3.033	69.48	0.147	55.82	0.272	-125.98
1600	0.546	179.71	2.680	65.10	0.162	55.26	0.268	-127.74
1800	0.539	176.53	2.420	61.16	0.178	55.32	0.264	-128.57
2000	0.537	173.88	2.212	57.34	0.196	55.50	0.264	-128.57

$V_{CE}=3V, I_C=30mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.641	-73.51	25.554	138.22	0.034	59.31	0.748	-48.55
200	0.597	-112.77	17.177	117.29	0.048	50.06	0.528	-74.92
400	0.573	-145.11	9.666	99.29	0.063	49.13	0.353	-101.64
600	0.568	-157.83	6.681	90.09	0.077	52.31	0.301	-114.88
800	0.571	-166.87	5.109	83.13	0.095	55.02	0.279	-121.85
1000	0.559	-171.88	4.128	78.07	0.110	55.89	0.266	-126.43
1200	0.552	-175.54	3.493	73.50	0.127	58.25	0.265	-128.49
1400	0.551	-179.39	3.053	68.85	0.145	58.42	0.266	-130.51
1600	0.547	177.65	2.698	64.25	0.162	57.14	0.262	-132.06
1800	0.540	174.57	2.430	60.38	0.179	56.72	0.259	-132.63
2000	0.535	171.80	2.228	56.85	0.198	56.71	0.259	-132.88

$V_{CE}=3V, I_C=50mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.600	-83.69	26.670	134.66	0.031	56.53	0.698	-52.92
200	0.581	-122.18	17.258	114.16	0.044	50.33	0.478	-79.64
400	0.578	-151.26	9.497	97.15	0.060	51.95	0.324	-105.59
600	0.575	-162.25	6.530	88.54	0.076	54.57	0.279	-118.24
800	0.578	-170.22	4.982	81.68	0.092	57.26	0.262	-124.72
1000	0.567	-174.98	4.026	76.70	0.107	58.22	0.253	-128.64
1200	0.562	-178.05	3.412	72.28	0.127	59.32	0.253	-129.90
1400	0.563	178.19	2.982	67.61	0.146	59.17	0.256	-131.79
1600	0.558	175.62	2.629	63.16	0.161	58.67	0.252	-133.12
1800	0.551	172.73	2.369	59.36	0.180	58.64	0.249	-133.43
2000	0.548	170.27	2.171	55.57	0.197	58.18	0.249	-133.60

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of February, 2005. Specifications and information herein are subject to change without notice.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.