
# Microsemi SCOTTSDALE DIVISION

#### 1N941 thru 1N946B-1

11.7 Volt Temperature Compensated Zener Reference Diodes

#### **DESCRIPTION**

The popular 1N941 thru 1N946B series of Zero-TC Reference Diodes proide s a selection of 11.7 V nominal voltage s and temperature coefficients to as low s 0.0002%/°C for minimal voltage change in the temperature the noperated at 7.5 mA. These glass aial-leaded DO-7 reference diodes are also available in JAN, JANTX, and JANTXV military qualifications. Microsemi also offers numerous other Zener Reference Diode products for a variet yof other voltage s from 6.2 V to 200 V.



IMPORTANT: For the most current data, consult MICROSEMI's website: http://www.microsemi.com

#### **FEATURES**

- JEDEC registered 1N941 thru 1N946B series
- Standard reference voltage of 11.7 V +/- 5% with tighter tolerances also available
- 1N941B, 942B, 943B, 944B, 945B also have military qualification to MIL-PRF-19500/157 up to the JANTXV leel by adding JAN, JANTX, or JANTXV prefixes to part numbers as well as "1" suffixe.g. JANTX1N944B-1. etc.
- Internal metallurgical bonds
- JANS Equivalent axil able ia SCD
- Radiation Hardened devices available by changing "N"prefi x to RH", e.g. RH9 44B, RH945B, etc. Also consult factory for RH" data sheet brochure

#### **APPLICATIONS / BENEFITS**

- Proid es minimal vilta ge changes over a b road temperature range
- For instrumentation and other circuit designs requiring a stable v Itage reference
- Maimum tem perature coefficient selections aviil able from 0.01%/€ to 0. 0002%/€
- Tight reference voltage toll erances available at 11.7 V nominal volumes by adding the tolerance 1%, 2%, 3%, etc. after the part number for further identification e.g. 1N944B-2%, 1N945A-1%, 1N944B-1-1%, etc.
- Fleibl e axial-lead mounting terminals
- Nonsensitive to ESD per MIL-STD-750 Method 1020

#### **MAXIMUM RATINGS**

- Operating & StorageTemperature: -65°C to +175°C
- DC Power Dissipation: 500 mW @ T<sub>L</sub> = 25°C and maimum curr ent I<sub>ZM</sub> of 39 mA. NOTE: For optimum vltag e-temperature stability, I<sub>Z</sub> = 7.5 mA (less than 95 mW in dissipated power)
- Solder temperatures: 260 °C for 10 s (maximum)

#### **MECHANICAL AND PACKAGING**

- CASE: Hermetically sealed glass case with DO-7 (DO-204AA) package
- TERMINALS: Tin-lead plated and solderable per MIL-STD-750, Method 2026
- MARKING: Part number and cathode band
- POLARITY: Reference diode to be operated with the banded end positive with respect to the opposite end
- TAPE & REEL option: Standard per EIA-296 (add T R"suffixto part number)
- WEIGHT: 0.2 grams.
- See package dimensions on last page



#### 1N941 thru 1N946B-1

## 11.7 Volt Temperature Compensated Zener Reference Diodes

*ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified							
JEDEC TYPE NUMBER (Note 1, 5 & 6)	ZENER VOLTAGE Vz @ I <sub>ZT</sub> (Note 4)	ZENER TEST CURRENT I <sub>ZT</sub>	MAXIMUM ZENER IMPEDANCE (Note 2) Z <sub>ZT</sub> @ I <sub>ZT</sub>	MAXIMUM REVERSE CURRENT I <sub>R</sub> @ 8 V	VOLTAGE TEMPERATURE STABILITY (Note 3 & 4) $\Delta V_{ZT}$ MAXIMUM	TEMPERATURE RANGE	EFFECTIVE TEMPERATURE COEFFICIENT α <sub>VZ</sub>
	VOLTS	mA	OHMS	μΑ	mV	°C	%/°C
1N941	11.12-12.28	7.5	30	15	88	0 to +75	0.01
1N941A	11.12-12.28	7.5	30	15	181	-55 to +100	0.01
1N941B	11.12-12.28	7.5	30	15	239	-55 to +150	0.01
1N942	11.12-12.28	7.5	30	15	44	0 to +75	0.005
1N942A	11.12-12.28	7.5	30	15	90	-55 to +100	0.005
1N942B	11.12-12.28	7.5	30	15	120	-55 to +150	0.005
1N943	11.12-12.28	7.5	30	15	18	0 to +75	0.002
1N943A	11.12-12.28	7.5	30	15	36	-55 to +100	0.002
1N943B	11.12-12.28	7.5	30	15	47	-55 to +150	0.002
1N944	11.12-12.28	7.5	30	15	9	0 to +75	0.001
1N944A	11.12-12.28	7.5	30	15	18	-55 to +100	0.001
1N944B	11.12-12.28	7.5	30	15	24	-55 to +150	0.001
1N945	11.12-12.28	7.5	30	15	4	0 to +75	0.0005
1N945A	11.12-12.28	7.5	30	15	9	-55 to +100	0.0005
1N945B	11.12-12.28	7.5	30	15	12	-55 to +150	0.0005
1N946	11.12-12.28	7.5	30	15	1.8	0 to +75	0.0002
1N946A	11.12-12.28	7.5	30	15	3.6	-55 to +100	0.0002

<sup>\*</sup>JEDEC Registered Data.

11.12-12.28

#### NOTES:

1N946B

1. For tighter oltages tolerances, add a hyphenated suffixto the part number for desired tolerance at the end of the part number, e.g. 1N944B-2%, 1N945B-1%, 1N944B-1-1%, etc.

15


2. Measured by superimposing 0.75 mA ac rms on 7.5 mA dc @ 25°C.

7.5

- 3. The makinum allowable change o bserved over the entire temperature range i.e., the diode voltage will not exceed the specified mV change at any discrete temperature between the established limits.
- 4. Voltage measurements to be performed 15 seconds after application of dc current.
- 5. The 1N941B, 1N942B, 1N943B, 1N944B, 1N945B also have militar y qualification to MIL-PRF-19500/157 up to the JANTXV level b y adding JAN, JANTX, or JANTXV prefixes to part numbers as well as "1" suffixe.g. J ANTX1N944B-1, JANTXV1N945B-1, etc.
- 6. Designate Radiation Hardened deices w ith RH" prefixinstead of 1 N, i.e. RH9 44B instead of 1N944B.

30



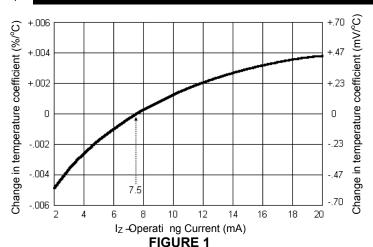

TYPICAL CHANGE OF TEMPERATURE COEFFICIENT WITH CHANGE IN OPERATING CURRENT.

The curve shown in Figure 1 is typical of the diode series and greatly simplifies the estimation of the Temperature Coefficient (TC) when the diode is operated at currents other than 7.5mA.

-55 to +150

EXAMPLE: A diode in this series is operated at a current of 7.5mA and has specified Temperature Coefficient (TC) limits of +/-0.002% C. To obtain the typical Temperature Coefficient limits for this same diode operated at a current of 6.0mA, the new TC limits (% C) can be estimated using the graph in FIGURE 1.

At a test current of 6.0mA the change in Temperature Coefficient (TC) is approximately -0.0009%.°C. The algebraic sum of +/-0.002%°C and -0.0009%,°C gives the new estimated limits of +0.0011%/oC and -0.0029%/oC.

0.0002



### 1N941 thru 1N946B-1

## 11.7 Volt Temperature Compensated Zener Reference Diodes

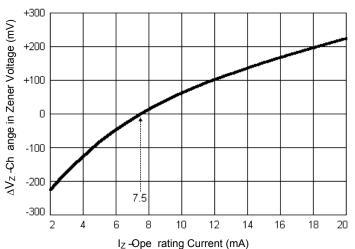



FIGURE 2

TYPICAL CHANGE OF ZENER VOLTAGE
WITH CHANGE IN OPERATING CURRENT.

This curve in Figure 2 illustrates the change of diode voltage arising from the effect of impedance. It is in effect, an exploded view of the zener operating region of the I-V characteristic.

In conjunction with Figure 1, this curve can be used to estimate total voltage regulation under conditions of both varying temperature and current.

#### **DIMENSIONS**



All dimensions in INCH mm