


**HIGH CURRENT SWITCHING APPLICATION.  
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.**

### FEATURES

- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- High Output Current :-800mA.
- Suffix U : Qualified to AEC-Q101  
ex) KRA223S-RTK/HU

### EQUIVALENT CIRCUIT

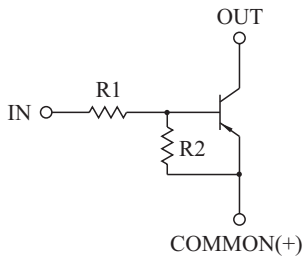

### BIAS RESISTOR VALUES

TYPE NO.	R1(k )	R2(k )
KRA221S	1	1
KRA222S	2.2	2.2
KRA223S	4.7	4.7
KRA224S	10	10
KRA225S	1	10
KRA226S	2.2	10



### MAXIMUM RATING (Ta=25 )

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRA221S 226S	$V_O$	-50	V
Input Voltage	KRA221S	$V_I$	-10, 10	V
	KRA222S		-12, 10	
	KRA223S		-20, 10	
	KRA224S		-30, 10	
	KRA225S		-10, 5	
	KRA226S		-12, 6	
Output Current	KRA221S 226S	$I_O$	-800	mA
Power Dissipation		$P_D$	200	mW
Junction Temperature		$T_j$	-55~150	
Storage Temperature Range		$T_{stg}$	-55~150	

### MARK SPEC

TYPE	KRA221S	KRA222S	KRA223S	KRA224S	KRA225S	KRA226S
MARK	PQ	PR	PS	PT	PU	PV

### Marking





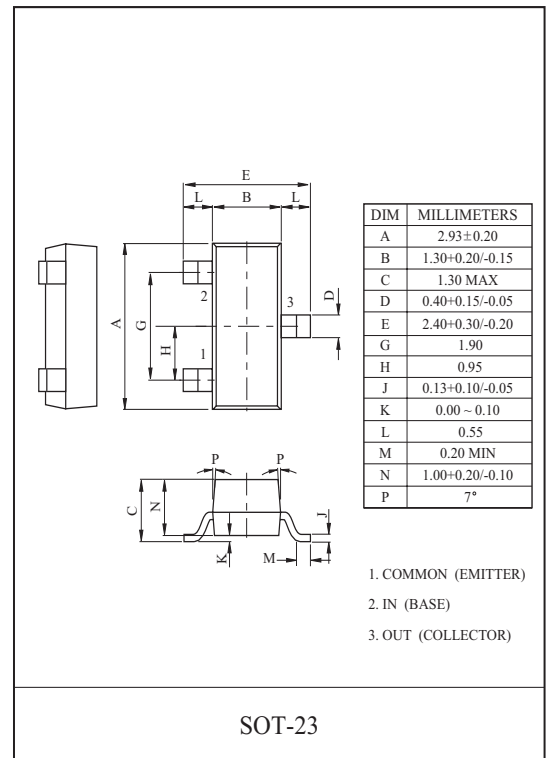
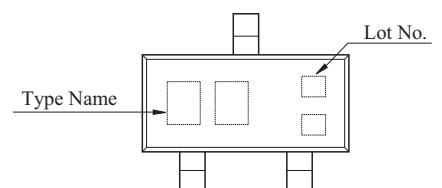


# KRA221S~KRA226S







## ELECTRICAL CHARACTERISTICS (Ta=25 )

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRA221S 226S	$I_{O(OFF)}$	$V_O=-30V, V_I=0$	-	-	-10	$\mu A$
DC Current Gain	KRA221S	$G_I$	$V_O=-5V, I_O=-50mA$	33	-	-	
	KRA222S			39	-	-	
	KRA223S			47	-	-	
	KRA224S			56	-	-	
	KRA225S			56	-	-	
	KRA226S			56	-	-	
Output Voltage	KRA221S 226S	$V_{O(ON)}$	$I_O=-50mA, I_I=-2.5mA$	-	-0.1	-0.3	V
Input Voltage (ON)	KRA221S	$V_{I(ON)}$	$V_O=-0.3V, I_O=-20mA$	-	-	-3.0	V
	KRA222S			-	-	-3.0	
	KRA223S			-	-	-3.0	
	KRA224S			-	-	-3.0	
	KRA225S			-	-	-3.0	
	KRA226S			-	-	-2.0	
Input Voltage (OFF)	KRA221S 224S	$V_{I(OFF)}$	$V_O=-5V, I_O=-0.1mA$	-0.5	-	-	V
	KRA225S 226S			-0.3	-	-	
Transition Frequency	KRA221S 226S	$f_T^*$	$V_O=-10V, I_O=-5mA, f=100MHz$	-	200	-	MHz
Input Current	KRA221S	$I_I$	$V_I=-5V$	-	-	-7.2	mA
	KRA222S			-	-	-3.8	
	KRA223S			-	-	-1.8	
	KRA224S			-	-	-0.88	
	KRA225S			-	-	-7.2	
	KRA226S			-	-	-3.6	
Input Resistor	KRA221S	R1	-	0.1	1	1.3	k
	KRA222S			1.54	2.2	2.86	
	KRA223S			3.29	4.7	6.11	
	KRA224S			7	10	13	
	KRA225S			0.7	1	1.3	
	KRA226S			1.54	2.2	2.86	
Resistor Ratio	KRA221S~224S	R2/R1	-	0.8	1.0	1.2	
	KRA225S			8	10	12	
	KRA226S			3.6	4.5	5.5	

# KRA221S~KRA226S

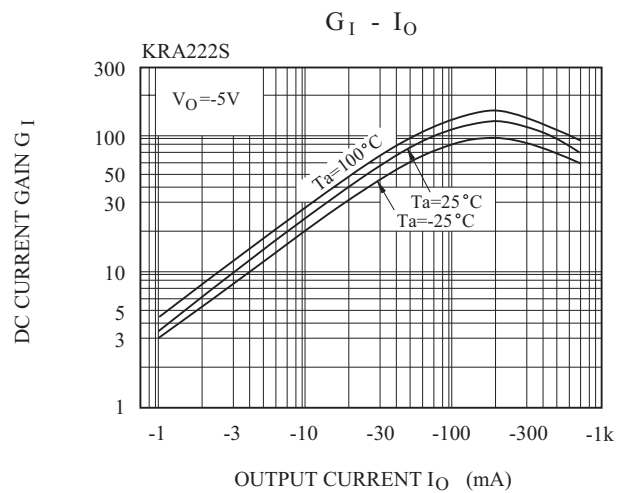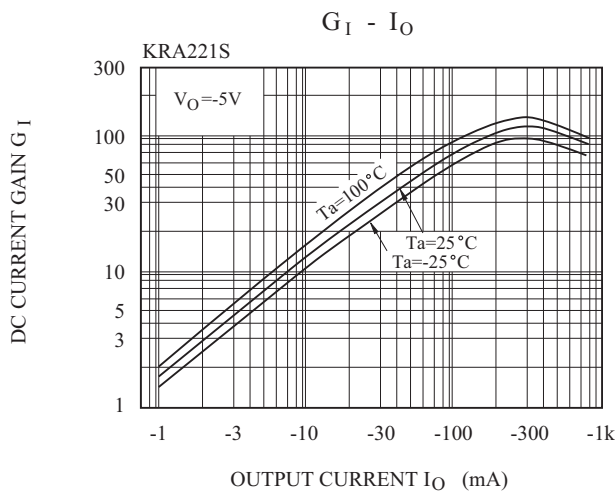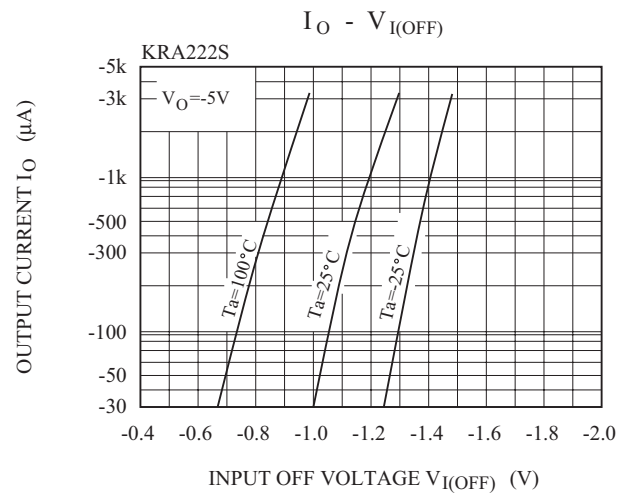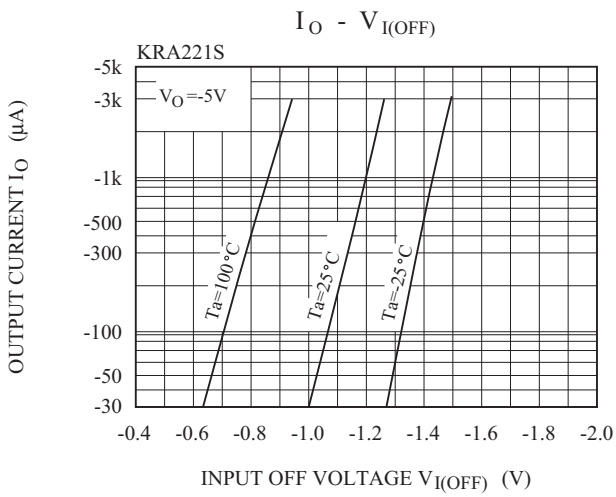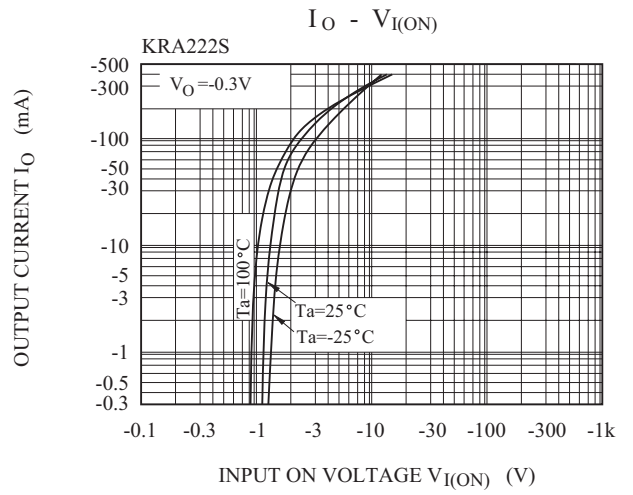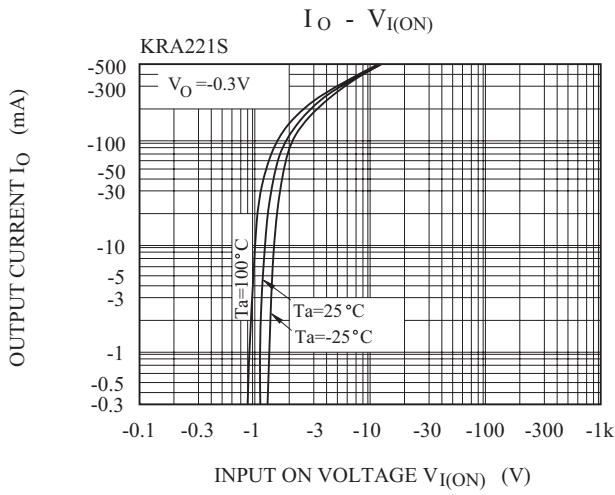

# KRA221S~KRA226S

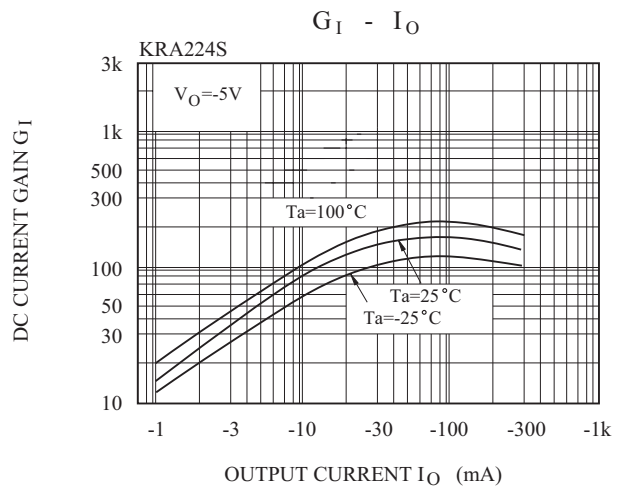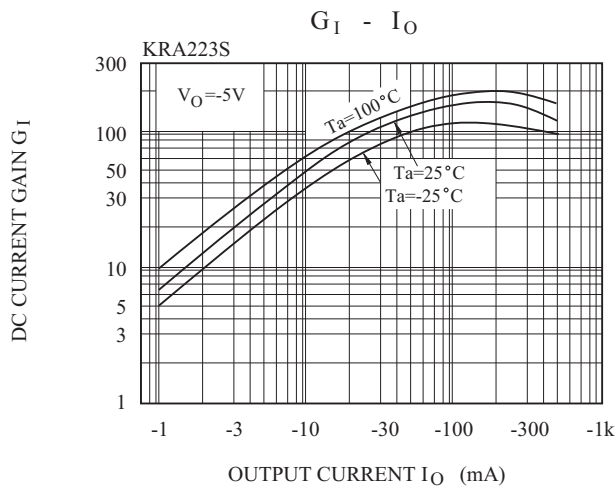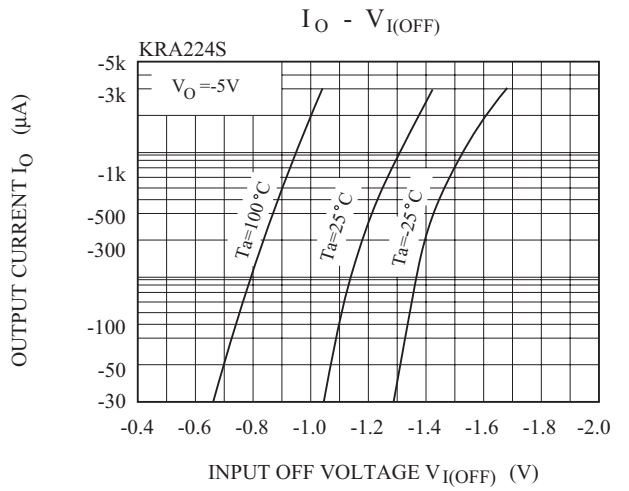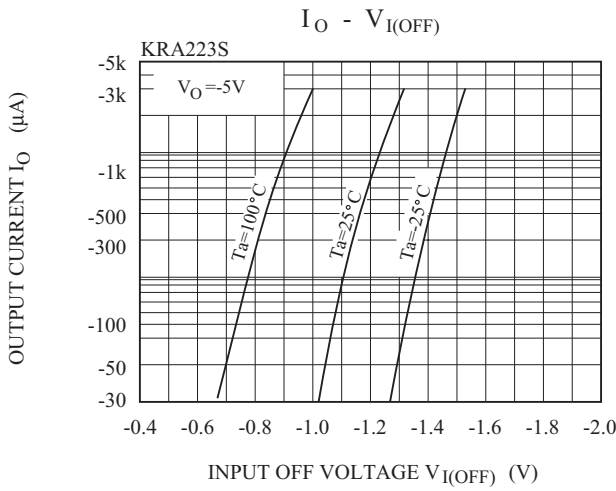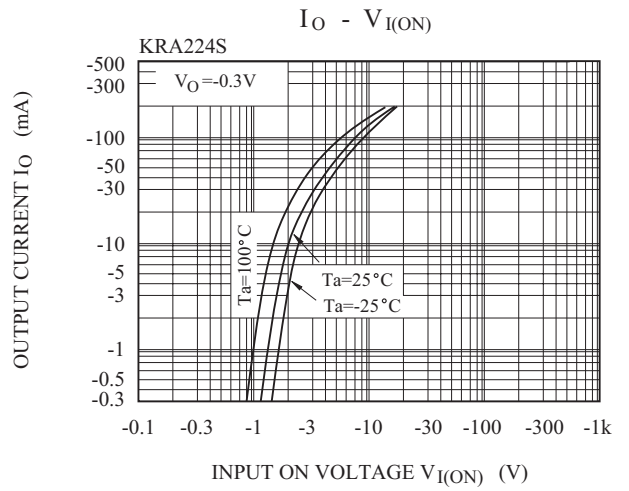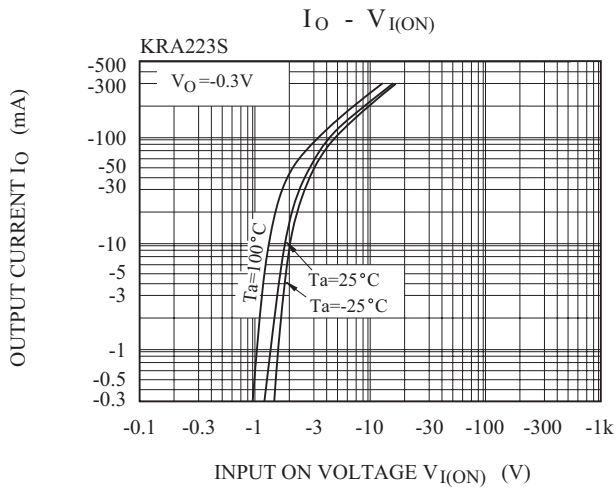

# KRA221S~KRA226S

