

# S102S11/S102S12 S202S11/S202S12

## SIP Type SSR with Snubber Circuit and Mousing Capability for External Heat Sink

### ■ Features

1. High radiation resin mold package
2. Built-in snubber circuit
3. Built-in zero-cross circuit  
(S102S12/S202S12)
4. High repetitive peak OFF-state voltage  
S102S11/S102S12  $V_{DRM} : 400V$   
S202S11/S202S12  $V_{DRM} : 600V$
5. RMS ON-state current  
 $I_T : \text{MAX. } 8A_{rms}$  at  $T_c \leq 88^\circ C$   
(With heat sink)
6. Isolation voltage between input and output  
( $V_{iso} : 4\ 000V_{rms}$ )
7. Recognized by UL, file No. E94758  
Approved by CSA, No. LR63705

### ■ Applications


1. Automatic vending machines
2. Amusement equipment
3. Programmable controllers

### ■ Model line-ups

	For 100V lines	For 200V lines
Built-in snubber circuit	<b>S102S11</b>	<b>S202S11</b>
Built-in snubber circuit and zero-cross circuit	<b>S102S12</b>	<b>S202S12</b>

### ■ Outline Dimensions

(Unit : mm)

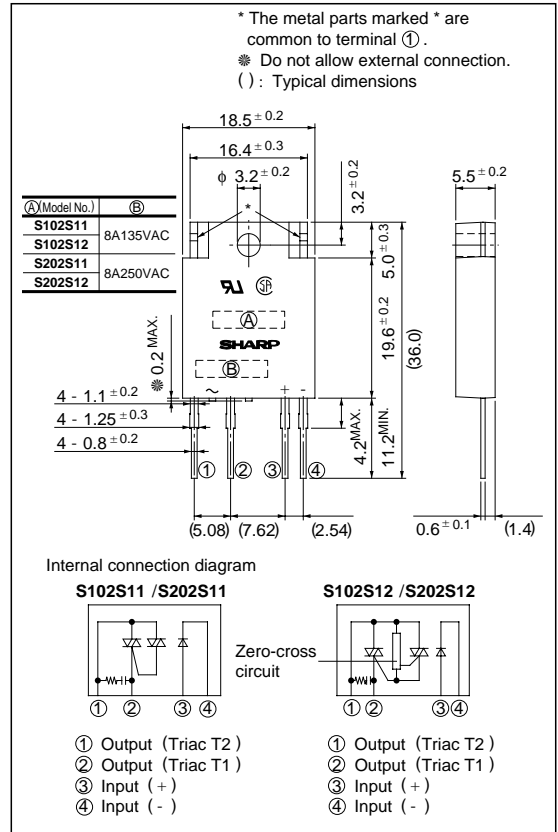

## Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit	
Input	Forward current	$I_F$	50	mA	
	Reverse voltage	$V_R$	6	V	
Output	RMS ON-state current	$I_T$	*48	A <sub>rms</sub>	
	*1 Peak one cycle surge current	$I_{surge}$	80	A	
	Repetitive peak-OFF state voltage	<b>S102S11/S102S12</b>	$V_{DRM}$	400	V
		<b>S202S11/S202S12</b>		600	
	Non-repetitive peak-OFF state voltage	<b>S102S11/S102S12</b>	$V_{DSM}$	400	V
		<b>S202S11/S202S12</b>		600	
Critical rate of rise of ON-state current		$dI_T/dt$	50	A/ $\mu$ s	
*2 Isolation voltage		$V_{iso}$	4 000	V <sub>rms</sub>	
Operating temperature		$T_{opr}$	- 20 to + 80	°C	
Storage temperature		$T_{stg}$	- 30 to + 100	°C	
*3 Soldering temperature		$T_{sol}$	260	°C	
Load supply voltage	<b>S102S11/S102S12</b>	$V_{out}$	135	V <sub>rms</sub>	
	<b>S202S11/S202S12</b>		250		

\*1 50Hz sine wave, start at Tj = 25°C

\*2 60Hz AC for 1 minute, RH = 40 to 60%, Apply voltages between input and output, by the dielectric withstand voltage tester with zero-cross circuit. (Input and output shall be shorted respectively).

(Note) When the isolation voltage is necessary at using external heat sink, please use the insulation sheet.

\*3 For 10 seconds

\*4 Tc &lt;= 88°C


## Electro-optical Characteristics

(Ta = 25°C)


Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	$V_F$	$I_F = 20\text{mA}$	-	1.2	1.4	V	
	Reverse current	$I_R$	$V_R = 3\text{V}$	-	-	$10^{-4}$	A	
Output	ON-state voltage	$V_T$	$I_T = 2\text{Arms}$	-	-	1.5	V <sub>rms</sub>	
	Minimum Operating current	<b>S102S11/S102S12</b> <b>S202S11/S202S12</b>	$I_{op}$	$V_{out} = 120\text{Vrms}$	-	-	50	mA <sub>rms</sub>
				$V_{out} = 240\text{Vrms}$				
	Open circuit leak current	<b>S102S11/S102S12</b> <b>S202S11/S202S12</b>	$I_{leak}$	$V_{out} = 120\text{Vrms}$	-	-	5	mA <sub>rms</sub>
				$V_{out} = 240\text{Vrms}$				
	Critical rate of rise of OFF-state voltage		$dV/dt$	$V_D = 2/3V_{DRM}$	30	-	-	V/ $\mu$ s
	Critical rate of rise of Commutating OFF-state voltage		$(dV/dt)_C$	$T_j = 125^\circ\text{C}$ $dI_T/dt = -4.0\text{A/ms}$ , *5	5	-	-	V/ $\mu$ s
Zero-cross voltage	<b>S102S12/S202S12</b>	$V_{OX}$	$I_F = 8\text{mA}$	-	-	35	V	
Transfer characteristics	Minimum trigger current	<b>S102S11/S202S11</b> <b>S102S12/S202S12</b>	$I_{FT}$	$V_D = 12\text{V}, R_L = 30\Omega$	-	-	8	mA
				$V_D = 6\text{V}, R_L = 30\Omega$	-	-	8	mA
	Isolation resistance		$R_{ISO}$	DC500V, RH = 40 to 60%	$10^{10}$	-	-	$\Omega$
	Turn-on time	<b>S102S11/S202S11</b> <b>S102S12/S202S12</b>	$t_{on}$	AC60Hz	-	-	1	ms
					-	-	9.3	ms
Turn-off time		$t_{off}$	AC60Hz	-	-	9.3	ms	
Thermal resistance (Between junction and case)		$R_{th(j-c)}$	-	-	4.0	-	°C/W	
Thermal resistance (Between junction and ambience)		$R_{th(j-a)}$	-	-	40	-	°C/W	

\*5 **S102S11/S102S12**:  $V_D = 400\text{V}$  **S202S11/S202S12**:  $V_D = 600\text{V}$


**Fig. 1 RMS ON-state Current vs. Case Temperature**

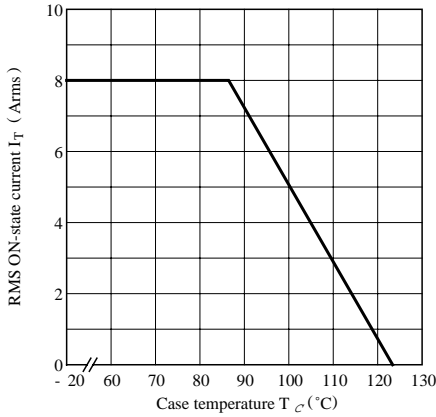


**Fig. 2 RMS ON-state Current vs. Ambient Temperature**

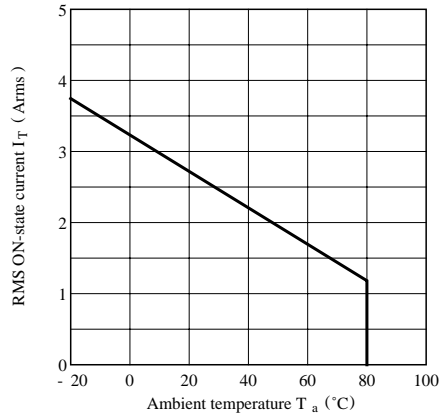


**Fig. 3 Forward Current vs. Forward Voltage (Typical Value)**

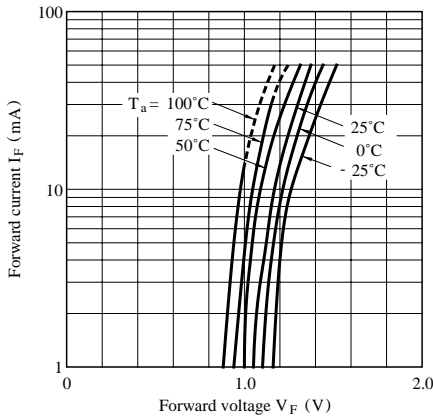


**Fig. 4 Surge Current vs. Power-on Cycle**

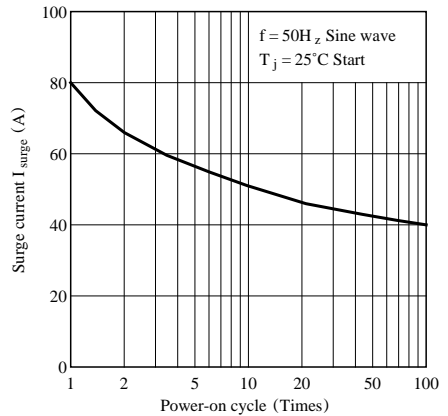


**Fig. 5 Maximum ON-state Power Dissipation vs. RMS ON-state Current (Typical Value)**

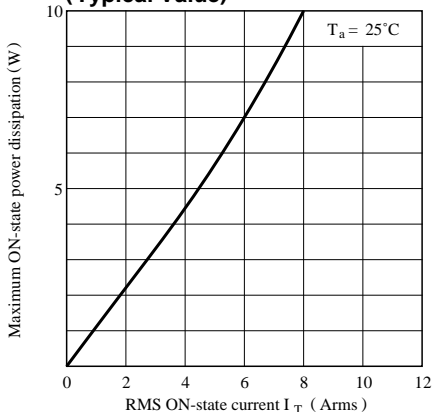


**Fig. 6 Minimum Trigger Current vs. Ambient Temperature (Typical Value) (S102S11/S202S11)**

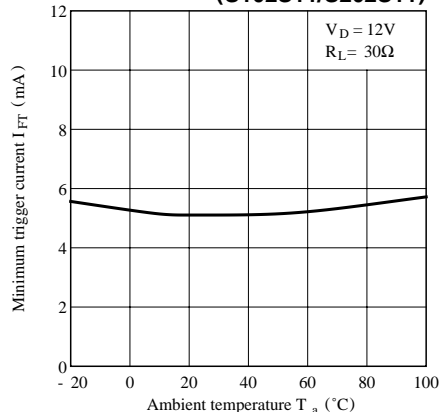


**Fig. 7 Minimum Trigger Current vs. Ambient Temperature (Typical Value) (S102S12/ S202S12)**

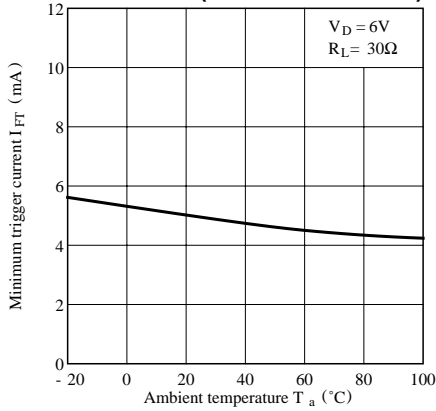

**Fig. 8 Open Circuit Leak Current vs. Supply Voltage (Typical Value) (S102S11/S102S12)**

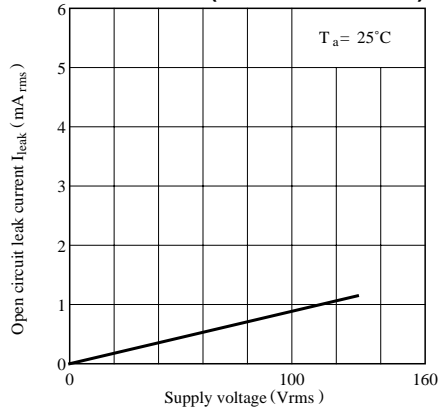

**Fig. 9 Open Circuit Leak Current vs. Supply Voltage (Typical Value) (S202S11/S202S12)**

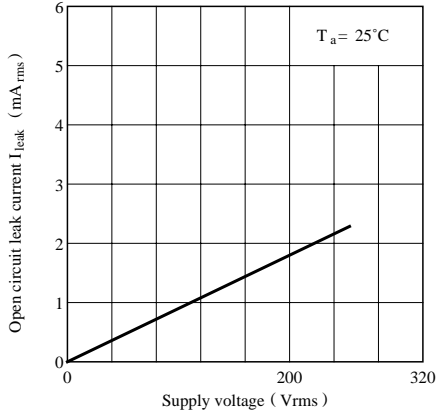

● Please refer to the chapter “Precautions for Use.”