


**NEW Product**



- 12 A output current
- 12 V input voltage
- Wide-output voltage adjust
  - 1.2 Vdc to 5.5 Vdc for suffix 'W' and 0.8 Vdc to 1.8 Vdc for suffix 'L'
- Auto-track™ sequencing\*
- Margin up/down controls
- Efficiencies up to 94%
- Output ON/OFF inhibit
- Output voltage sense
- Point-of-Load-Alliance (POLA) compatible
- Available RoHS compliant

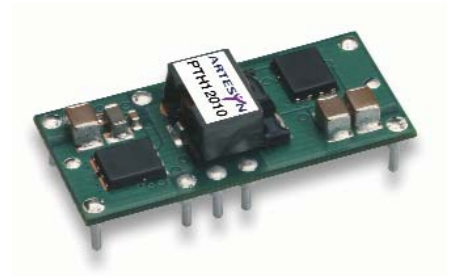

**2 YEAR WARRANTY**

The PTH12010 is a next generation series of non-isolated dc-dc converters offering some of the most advanced POL features available in the industry. The primary new feature provides for sequencing between multiple modules, a function, which is becoming a necessity for powering advanced silicon including DSP's, FPGA's and ASIC's requiring controlled power-up and power-down. Other industry leading features include margin up/down controls and efficiencies up to 94%. The PTH12010 has an input voltage of 10.8 Vdc to 13.2 Vdc and offers a wide 1.2 Vdc to 5.5 Vdc output voltage range with up to 12 A output current, which allows for maximum design flexibility and a pathway for future upgrades.

*All specifications are typical at nominal input, full load at 25 °C unless otherwise stated*  
 $C_{in} = 560 \mu F$ ,  $C_{out} = 0 \mu F$

**SPECIFICATIONS**

**OUTPUT SPECIFICATIONS**

|                                       |                            |  |
|---------------------------------------|----------------------------|--|
| Voltage adjustability<br>(See Note 4) | Suffix '-W'<br>Suffix '-L' | 1.2-5.5 Vdc<br>0.8-1.8 Vdc                         |
| Setpoint accuracy                     |                            | ±2.0% Vo   |
| Line regulation                       |                            | ±10 mV typ.  |
| Load regulation                       |                            | ±12 mV typ.  |
| Total regulation                      |                            | ±3.0% Vo   |
| Minimum load                          |                            | 0 A  |
| Ripple and noise<br>20 MHz bandwidth  | Suffix '-W'<br>Suffix '-L' | 25 mV pk-pk<br>25 mV pk-pk                         |
| Temperature co-efficient              | -40 °C to +85 °C           | ±0.5% Vo   |
| Transient response<br>(See Note 5)    |                            | 70 µs recovery time<br>Overshoot/undershoot 100 mV |
| Margin adjustment                     |                            | ±5.0% Vo   |

**INPUT SPECIFICATIONS**

|                      |                    |                |
|----------------------|--------------------|----------------|
| Input voltage range  | (See Note 3)       | 10.8-13.2 Vdc  |
| Input current        | No load            | 10 mA typ.     |
| Remote ON/OFF        | (See Note 1)       | Positive logic |
| Start-up time        |                    | 1 V/ms         |
| Undervoltage lockout |                    | 9.0-9.5 V typ. |
| Track input voltage  | Pin 8 (See Note 6) | ±0.3 Vin       |

**EMC CHARACTERISTICS**

|                         |                       |
|-------------------------|-----------------------|
| Electrostatic discharge | EN61000-4-2, IEC801-2 |
| Conducted immunity      | EN61000-4-6           |
| Radiated immunity       | EN61000-4-3           |

**GENERAL SPECIFICATIONS**

|                         |                            |   |
|-------------------------|----------------------------|---|
| Efficiency              | See Tables on page 2       |   |
| Insulation voltage      | Non-isolated               |   |
| Switching frequency     | Suffix '-W'<br>Suffix '-L' | 300 kHz to 400 kHz<br>200 kHz to 300 kHz            |
| Approvals and standards | EN60950<br>UL/cUL60950     |   |
| Material flammability   | UL94V-0                    |   |
| Dimensions              | (L x W x H)                | 34.80 x 15.75 x 9.00 mm<br>1.370 x 0.620 x 0.354 in |
| Weight                  | 5 g (0.18 oz)              |   |
| MTBF                    | Telcordia SR-332           | 7,092,000 hours                                     |

**ENVIRONMENTAL SPECIFICATIONS**

|                                     |   |                                       |
|-------------------------------------|---|---------------------------------------|
| Thermal performance<br>(See Note 2) | Operating ambient, temperature<br>Non-operating | -40 °C to +85 °C<br>-40 °C to +125 °C |
| MSL ('Z' suffix only)               | JEDEC J-STD-020C                                | Level 3                               |

**PROTECTION**

|               |            |           |
|---------------|------------|-----------|
| Short-circuit | Auto reset | 20 A typ. |
|---------------|------------|-----------|

**International Safety Standard Approvals**



UL/cUL CAN/CSA-C22.2 No. 60950-1-03/UL 60950-1,  
File No. E174104




TÜV Product Service (EN60950) Certificate No. B 04 06 38572 044  
CB Report and Certificate to IEC60950, Certificate No.  
US/8292/UL

\*Auto-track™ is a trade mark of Texas Instruments

| OUTPUT POWER (MAX.) | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT (MIN.) | OUTPUT CURRENT (MAX.) | EFFICIENCY (MAX.) | REGULATION |        | MODEL NUMBER <sup>(8,9)</sup> |
|---------------------|---------------|----------------|-----------------------|-----------------------|-------------------|------------|--------|-------------------------------|
|                     |               |                |                       |                       |                   | LINE       | LOAD   |                               |
| 66 W                | 10.8-13.2 Vdc | 0.8-1.8 Vdc    | 0 A                   | 12 A                  | 89%               | ±10 mV     | ±12 mV | PTH12010L                     |
| 66 W                | 10.8-13.2 Vdc | 1.2-5.5 Vdc    | 0 A                   | 12 A                  | 94%               | ±10 mV     | ±12 mV | PTH12010W                     |

Part Number System with Options

**PTH12010WAST**

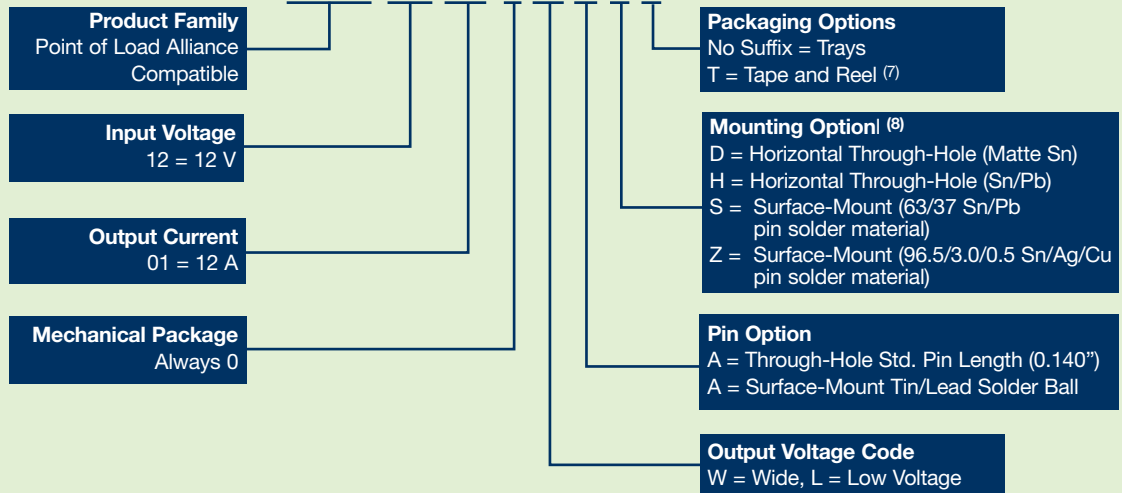

**Output Voltage Adjustment of the PTH12010 Series**

The ultra-wide output voltage trim range offers major advantages to users who select the PTH12010. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 1.2 V to 5.5 V for suffix 'W' and 0.8 Vdc to 1.8 Vdc for suffix 'L'. When the PTH12010 converter leaves the factory the output has been adjusted to the default voltage of 1.2 V for the PTH12010W and 0.8 V for PTH12010L.

EFFICIENCY TABLE - PTH12010W (I<sub>o</sub> = 8 A)

| OUTPUT VOLTAGE | EFFICIENCY |
|----------------|------------|
| Vo = 5.0 V     | 94%        |
| Vo = 3.3 V     | 93%        |
| Vo = 2.5 V     | 91%        |
| Vo = 2.0 V     | 90%        |
| Vo = 1.8 V     | 89%        |
| Vo = 1.5 V     | 88%        |
| Vo = 1.2 V     | 86%        |


EFFICIENCY TABLE - PTH12010L (I<sub>o</sub> = 8 A)

| OUTPUT VOLTAGE | EFFICIENCY |
|----------------|------------|
| Vo = 1.8 V     | 89%        |
| Vo = 1.5 V     | 88%        |
| Vo = 1.2 V     | 86%        |
| Vo = 1.0 V     | 84%        |
| Vo = 0.8 V     | 82%        |


**Notes**

- Remote ON/OFF. Positive Logic  
ON: Pin 3 open; or V > Vin - 0.5 V  
OFF: Pin 3 GND; or V < 0.8 V (min - 0.2 V).
- See Figures 1, 2 and 3 for safe operating curves for the PTH12010W and Figures 6 and 7 for PTH12010L.
- A 560 µF electrolytic input capacitor is required for proper operation. The capacitor must be rated for a minimum of 800 mA rms of ripple current.
- An external output capacitor is not required for basic operation. Adding 330 µF of distributed capacitance at the load will improve the transient response.
- 1 A/µs load step, 50 to 100% I<sub>o,max</sub>, C<sub>out</sub> = 330 µF.
- If utilized Vout will track applied voltage by ±0.3 V (up to Vo set point).
- Tape and reel packaging only available on the surface-mount versions.
- To order Pb-free (RoHS compatible) surface-mount parts replace the mounting option 'S' with 'Z', e.g. PTH12010WAZ. To order Pb-free (RoHS compatible) through-hole parts replace the mounting option 'H' with 'D', e.g. PTH12010WAD.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.


**PTH12010W Characteristic Data**

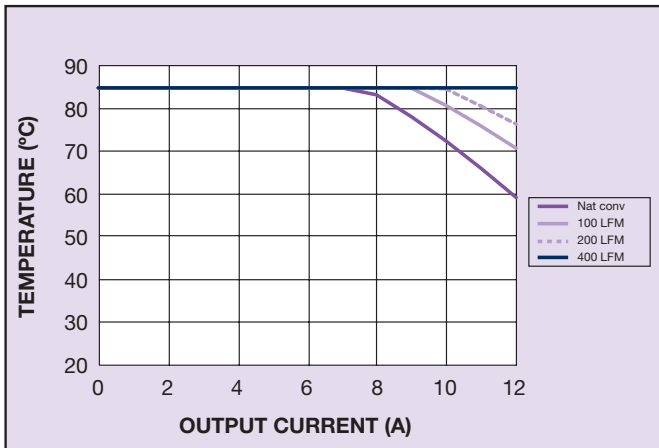


**Figure 1 - Safe Operating Area**  
Vin = 12 V, Output Voltage = 5 V (See Note A)

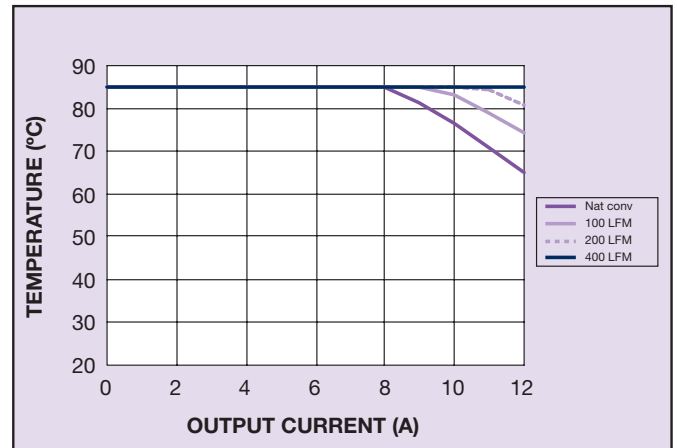


**Figure 2 - Safe Operating Area**  
Vin = 12 V, Output Voltage = 3.3 V (See Note A)

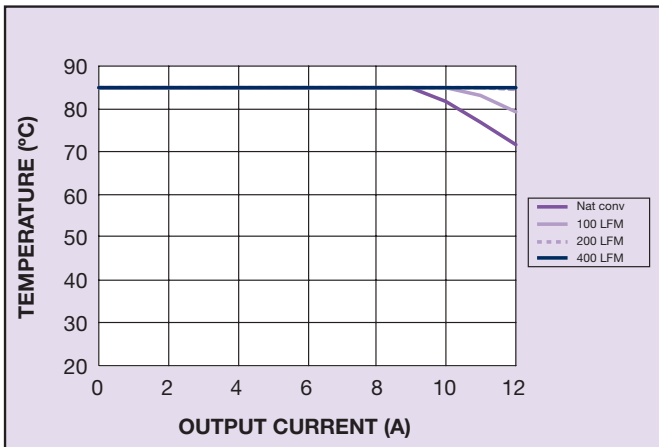

**Figure 3 - Safe Operating Area**  
Vin = 12 V, Output Voltage ≤ 1.8 V (See Note A)

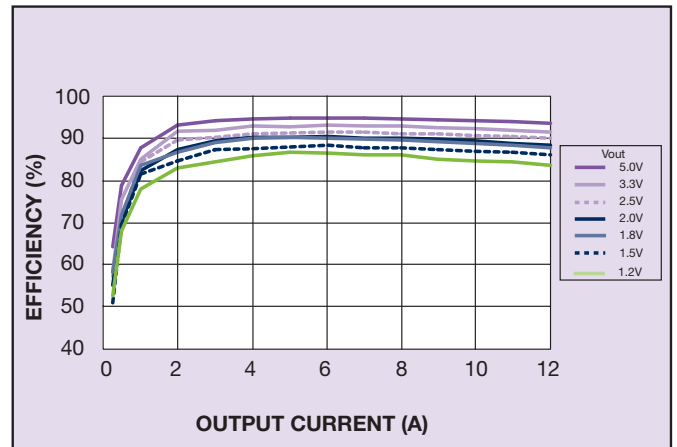

**Figure 4 - Efficiency vs Load Current**  
Vin = 12 V (See Note B)

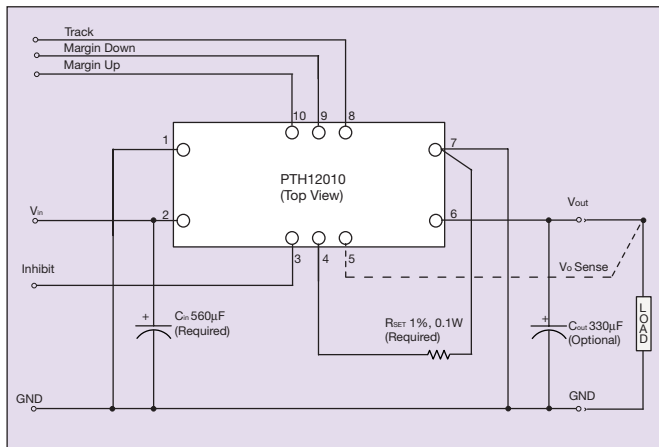


**Figure 5 - Standard Application**


**Notes**

- A** SOA curves represent the conditions at which internal components are within the Artesyn derating guidelines.
- B** Characteristic data has been developed from actual products tested at 25 °C. This data is considered typical data for the converter.


**PTH12010L Characteristic Data**

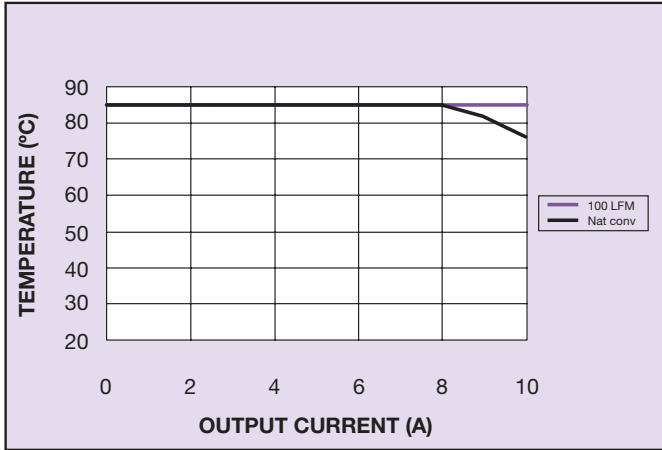

**Figure 6 - Safe Operating Area**  
Vin = 12 V, Output Voltage ≤ 1.8 V (See Note A)

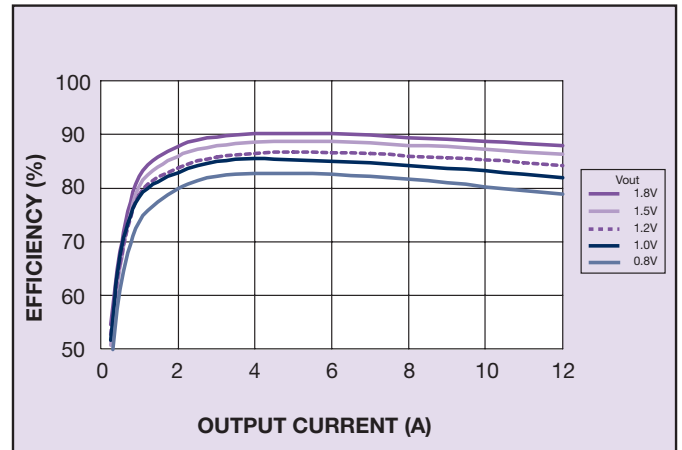

**Figure 7 - Efficiency vs Load Current**  
Vin = 12 V (See Note B)

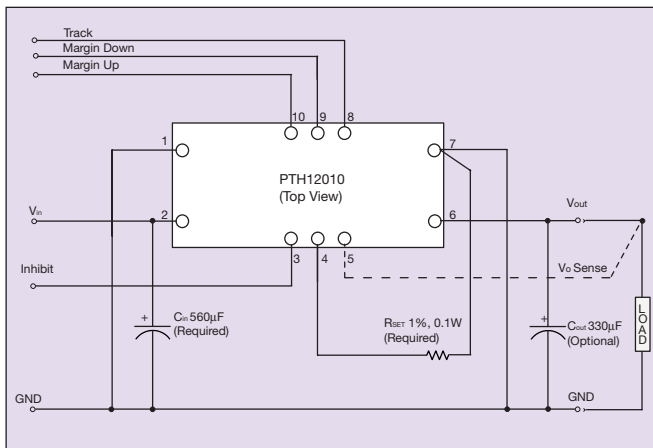

**Figure 8 - Standard Application**

**Notes**

- A** SOA curves represent the conditions at which internal components are within the Artesyn derating guidelines.
- B** Characteristic data has been developed from actual products tested at 25 °C. This data is considered typical data for the converter.

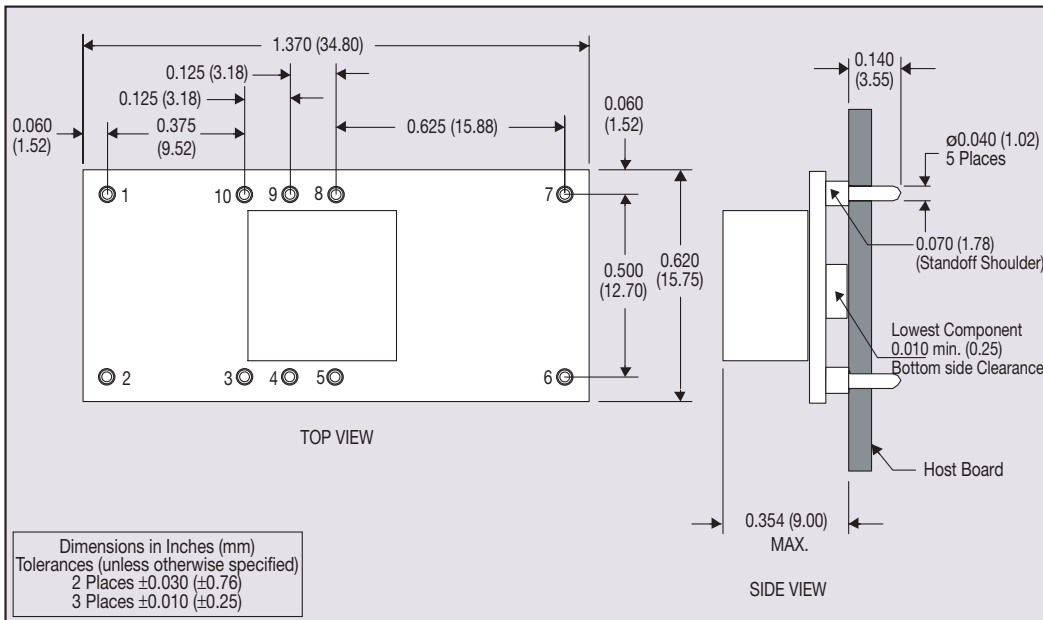


Figure 9 - Plated Through-Hole Mechanical Drawing

| PIN CONNECTIONS |              |
|-----------------|--------------|
| PIN NO.         | FUNCTION     |
| 1               | Ground       |
| 2               | Vin          |
| 3               | Inhibit*     |
| 4               | Vo adjust    |
| 5               | Vo sense     |
| 6               | Vout         |
| 7               | Ground       |
| 8               | Track        |
| 9               | Margin down* |
| 10              | Margin up*   |

\*Denotes negative logic:  
Open = Normal operation  
Ground = Function active

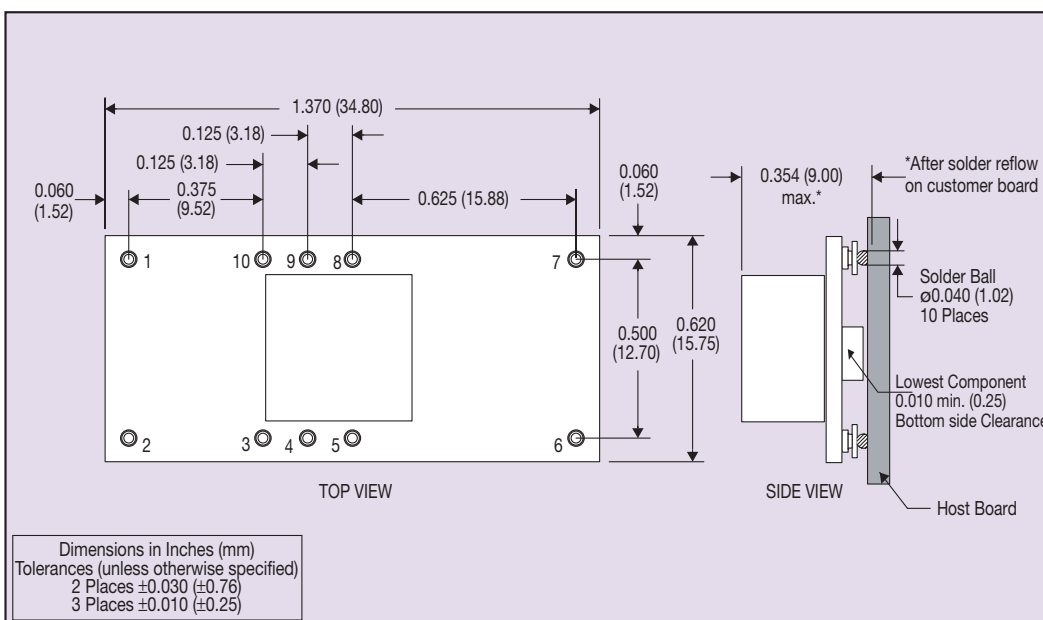


Figure 10 - Surface-Mount Mechanical Drawing