
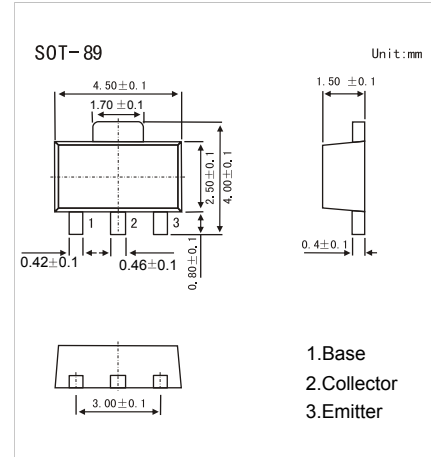


## ■ Features

- Built-in zener diode between collector and base.
- Zener diode has low dispersion.
- Darlingtion connection for high DC current gain.
- Built-in resistor between base and emitter.



## ■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V <sub>CB0</sub>	80	V
Collector - Emitter Voltage	V <sub>CE0</sub>	80	
Emitter - Base Voltage	V <sub>EB0</sub>	6	
Collector Current - Continuous	I <sub>c</sub>	2	A
Collector Current - Pulse	I <sub>CP</sub>	3	
Collector Power Dissipation (Note.1)	P <sub>C</sub>	0.5	W
		2	
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature Range	T <sub>stg</sub>	-55 to 150	

Note.1: Single pulse Pw=10ms,Duty=1/2

## ■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V <sub>CB0</sub>	I <sub>c</sub> = 100 μA, I <sub>E</sub> = 0	80			V
Collector- emitter breakdown voltage	V <sub>CE0</sub>	I <sub>c</sub> = 1 mA, I <sub>B</sub> = 0	80			
Emitter - base breakdown voltage	V <sub>EB0</sub>	I <sub>E</sub> = 100 μA, I <sub>c</sub> = 0	6			
Collector-base cut-off current	I <sub>CB0</sub>	V <sub>CB</sub> = 70 V, I <sub>E</sub> = 0			10	μA
Emitter cut-off current	I <sub>EB0</sub>	V <sub>EB</sub> = 5V, I <sub>c</sub> =0			3	mA
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>c</sub> =1 A, I <sub>B</sub> =1mA			1.5	V
DC current gain	h <sub>FE</sub>	V <sub>CE</sub> = 2V, I <sub>c</sub> = 1 A	1000		10000	
Collector output capacitance	C <sub>ob</sub>	V <sub>CB</sub> = 10V, I <sub>E</sub> = 0, f=1MHz		25		pF
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = 5V, I <sub>E</sub> = -100mA, f=30MHz		80		MHz

## ■ Marking

Marking	DM
---------	----

## Typical Characteristics

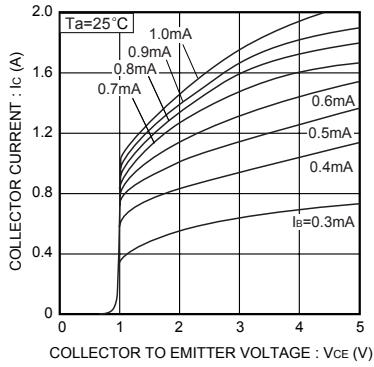


Fig.1 Grounded emitter output characteristics

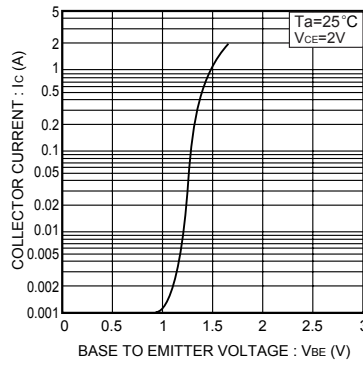


Fig.2 Grounded emitter propagation characteristics

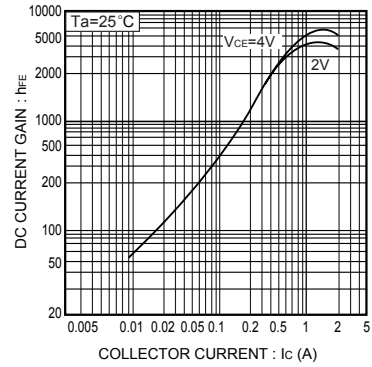


Fig.3 DC current gain vs. collector current

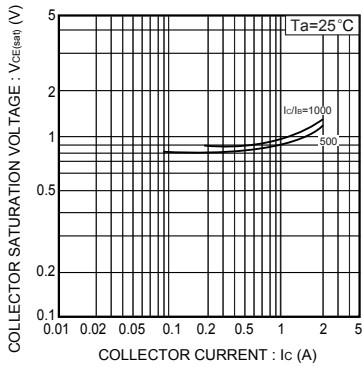


Fig.4 Collector-emitter saturation voltage vs. collector current

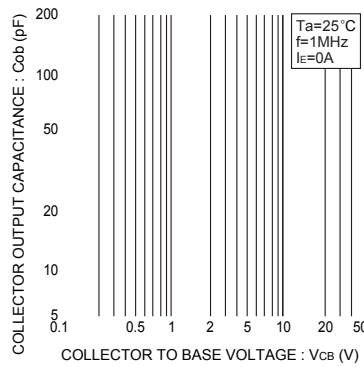


Fig.5 Collector output capacitance vs. collector-base voltage

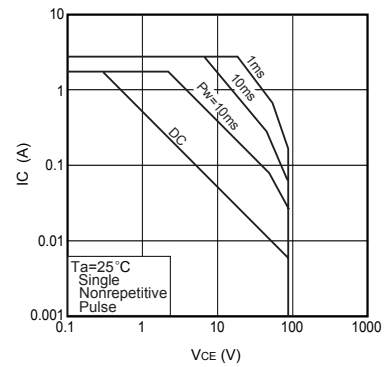


Fig.6 Safe operating area