



MS115S Series

Ø115mm Xenon Lamp Signal Lights

- Xenon lights
- Outstanding visibility at distance
- PCB module style Xenon lamp
- IP65 rated




Ordering Information


MS115S - S 20 - R
 ① ②

① Power Supply	00	12-24V AC/DC
	10	110V AC
	20	220V AC
② Lens Colors	R	Red
	Y	Yellow
	G	Green
	B	Blue
	C	Clear

Dimensions

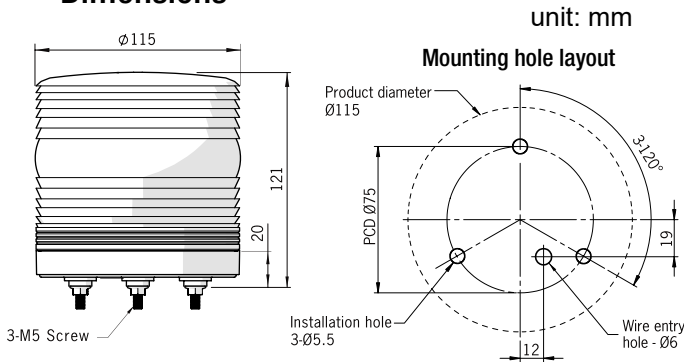


Wiring Diagram

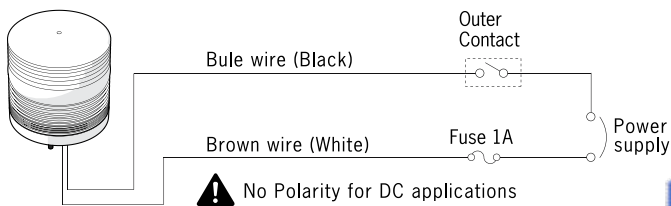

Specifications

Lighting type	Xenon Strobe		
Power Supply	12~24V AC/DC	110V AC	220V AC
Current Consumption	0.08~0.15A	0.07A	0.03A
Flashing Rate	60±10 times/min		
Vibration	0.75mm at 10~55 Hz		
Lens Material	PC Plastic		
Ambient Temperature	-20~40°C		
Storage Temperature	-20~70°C		
Ambient Humidity	45~85% RH		
Degree of Protection	IP65		
Recommended Wire Size	UL 2464, 22 AWG X 2C, 300mm		
Weight	315g		
Certificate/Compliance	RoHS, UL		


How to install Xenon bulb

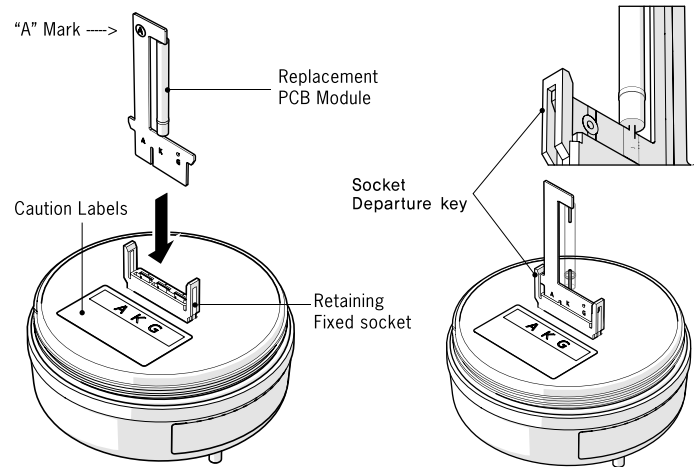

The new lamp should be inserted firmly to match the same signal A K G (or A G K) mark. Printed "A" in circuit and label.

- ⚠ - If you insert reverse direction, the lamp can not operate.
- ⚠ - Insert the lamp circuit board correctly. not to inclined.

Wall mounting options (for all MS115 Series)

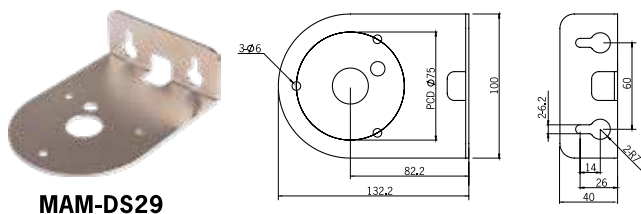

Supplier No.	MS86S-LAMP-02	MS86S-LAMP-10
Description.	Xenon Lamp I - Type, 3W 12~24V Lamp life: 1,000,000 Frequency. (2,000 hours)	Xenon Lamp U - Type, 6W AC110V / 220V Lamp life: 1,000,000 Frequency. (2,000 hours)