


Service set for OP 73micro, OP 73, OP 77A, OP 77B Quantity and content: see technical data

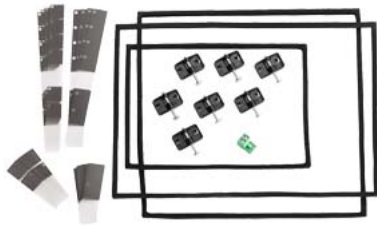

General information	
Product type designation	Service set
Standards, approvals, certificates	
CE mark	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	55 °C
Ambient temperature during storage/transportation	
• min.	-20 °C
• max.	70 °C
Relative humidity	
• Operation, max.	95 %
Scope of supply	
Delivery quantity in pieces	1; Content: 1x mounting seal OP73, 1x mounting seal OP77, 4x plastic mounting clip, 1x 2-pin female connector
• Parts per unit	
Other	
Note:	for OP73micro, OP73, OP77A, OP77B
Usable in the following products	
• Product 1	6AV6640-0BA11-0AX0
• Product 2	6AV6641-0AA11-0AX0
• Product 3	6AV6641-0BA11-0AX0
• Product 4	6AV6641-0BA11-0AX1
• Product 5	6AV6641-0CA01-0AX0
• Product 6	6AV6641-0CA01-0AX1
last modified:	12/16/2020