



## Main

Range of Product	Harmony XVR
Product or Component Type	Prewired rotating mirror beacon
Sound signalling	Buzzer
Device short name	XVR
Mounting diameter	4.72 in (120 mm)
IP degree of protection	IP23 IEC 60529
[Us] rated supply voltage	24 V AC/DC
Light source	High luminosity LED, red
Noise level	50...90 dB continuous or intermittent tone)1 m

## Complementary

Material	ABS (acrylonitrile butadiene-styrene) body part AS globe
CAD overall width	4.72 in (120 mm)
CAD overall depth	4.72 in (120 mm)
Net Weight	1.10 lb(US) (0.5 kg)
Marking	CE
Product mounting	By 3 M5 screws
Supply voltage limits	19...30 V DC 21.6...26.4 V AC
[Uimp] rated impulse withstand voltage	0.8 kV
Current Consumption	196 mA
Flashing frequency	2.3 Hz
Clamping connection capacity	0.83 mm <sup>2</sup>
AWG gauge	AWG 18
Cable length	15.75 in (400 mm)

## Environment

Standards	EN 61000-6-4 EN 61000-6-2
Protective treatment	TC
Ambient Air Temperature for Storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	14...122 °F (-10...50 °C)
Electrical shock protection class	Class II IEC 61140

## Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	3606480033230
Nbr. of units in pkg.	1
Package weight(Lbs)	22.50 oz (638 g)
Returnability	No
Country of origin	JP

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	7.68 in (19.5 cm)
Package 1 width	5.43 in (13.8 cm)
Package 1 Length	5.51 in (14 cm)
Unit Type of Package 2	S04
Number of Units in Package 2	8
Package 2 Weight	14.35 lb(US) (6.507 kg)
Package 2 Height	11.81 in (30 cm)
Package 2 width	15.75 in (40 cm)
Package 2 Length	23.62 in (60 cm)
Unit Type of Package 3	PAL
Number of Units in Package 3	160
Package 3 Weight	216.58 lb(US) (98.24 kg)
Package 3 Height	47.24 in (120 cm)
Package 3 width	31.50 in (80 cm)
Package 3 Length	62.99 in (160 cm)

## Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Rotating Mirror Beacon

Dimensions

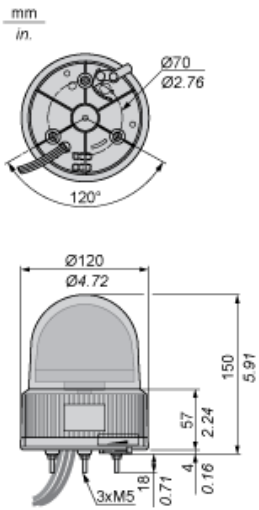

---

Rotating Mirror Beacon

---

Panel Cut-out

