

GaAs MMIC SMT PASSIVE FREQUENCY DOUBLER, 4 - 8 GHz INPUT



Typical Applications


The HMC204MS8G / HMC204MS8GE is suitable for:

- Wireless Local Loop
- LMDS, VSAT, and Point-to-Point Radios
- UNII & HiperLAN
- Test Equipment

Features

- Conversion Loss: 17 dB
- Fo, 3Fo, 4Fo Isolation: 42 dB
- Passive: No Bias Required
- Ultra Small Package: MSOP8

Functional Diagram

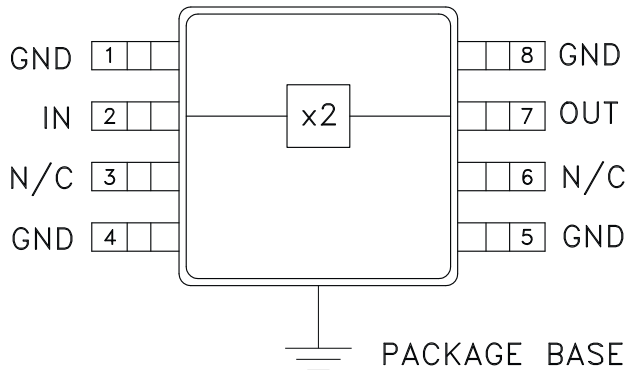

General Description

The HMC204MS8G & HMC204MS8GE are passive miniature frequency doublers in 8 lead MSOP surface mount packages. Suppression of undesired fundamental and higher order harmonics is 42 dB typical with respect to input signal level. The doubler utilizes the same GaAs Schottky diode/balun technology found in Hittite MMIC mixers. It requires no DC bias and adds no measurable phase noise onto the multiplied signal.

Electrical Specifications, $T_A = +25^\circ C$, As a Function of Drive Level

| Parameter | Input = +10 dBm | | | Input = +12 dBm | | | Input = +15 dBm | | | Units |
|--|-----------------|------|------|-----------------|------|------|-----------------|------|------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| Frequency Range, Input | 5.5 - 7.5 | | | 5.0 - 8.0 | | | 4.0 - 8.0 | | | GHz |
| Frequency Range, Output | 11.0 - 15.0 | | | 10.0 - 16.0 | | | 8.0 - 16.0 | | | GHz |
| Conversion Loss | | 17 | 21 | | 17 | 22 | | 17 | 21 | dB |
| FO Isolation (with respect to input level) | 37 | 42 | | 37 | 42 | | 39 | 45 | | dB |
| 3FO Isolation (with respect to input level) | 37 | 45 | | 37 | 45 | | 35 | 45 | | dB |
| 4FO Isolation (with respect to input level) | 45 | 55 | | 40 | 50 | | 35 | 45 | | dB |


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D


GaAs MMIC SMT PASSIVE FREQUENCY DOUBLER, 4 - 8 GHz INPUT




Conversion Gain vs. Temperature @ +15 dBm Drive Level

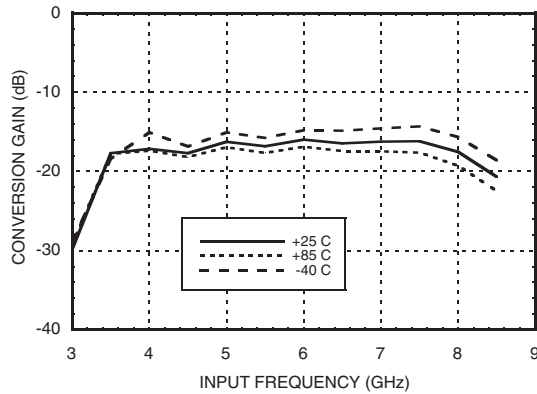


Conversion Gain @ +25° vs. Drive Level

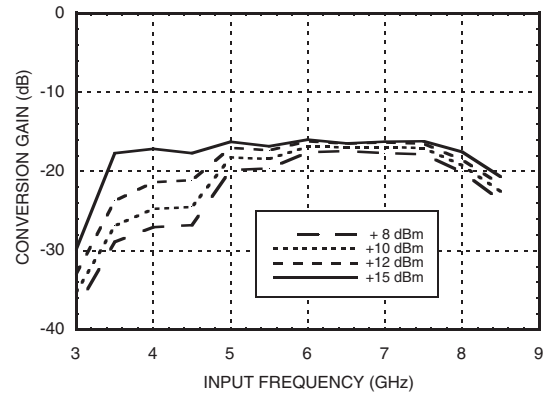

Isolation @ +15 dBm Drive Level*

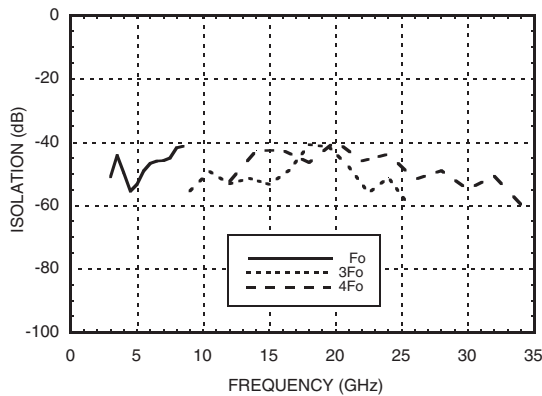


Input Return Loss vs. Drive Level

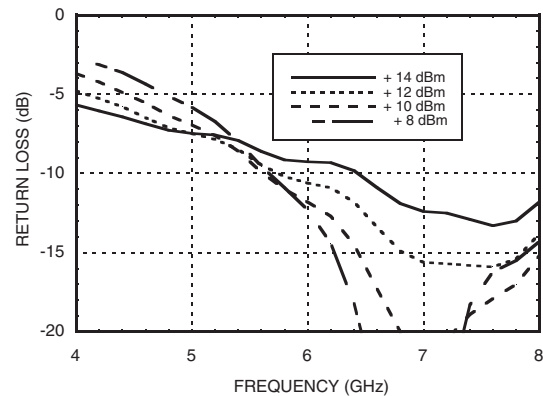

*With respect to input level

Output Return Loss

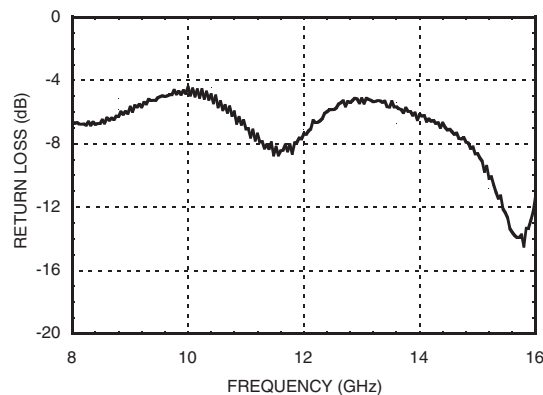

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D

GaAs MMIC SMT PASSIVE FREQUENCY DOUBLER, 4 - 8 GHz INPUT




Absolute Maximum Ratings

| | |
|-----------------------|----------------|
| Input Drive | +27 dBm |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C |



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Outline Drawing

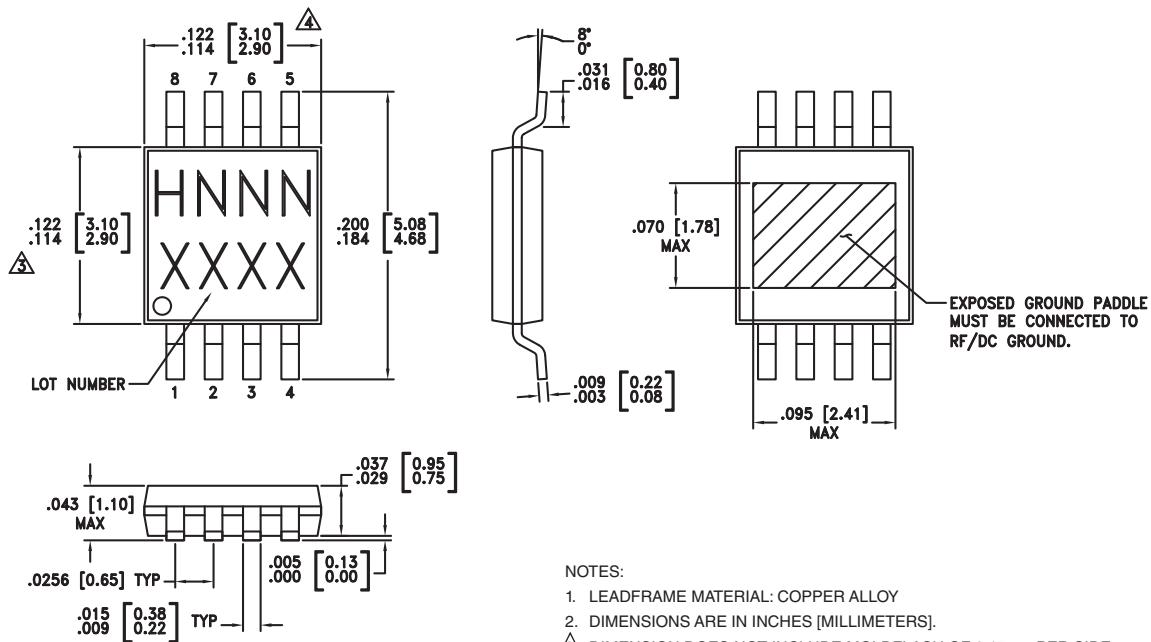

Package Information

| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[3] |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC204MS8G | Low Stress Injection Molded Plastic | Sn/Pb Solder | MSL1 ^[1] | H204 XXXX |
| HMC204MS8GE | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 ^[2] | <u>H204</u> XXXX |


[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX



Evaluation PCB

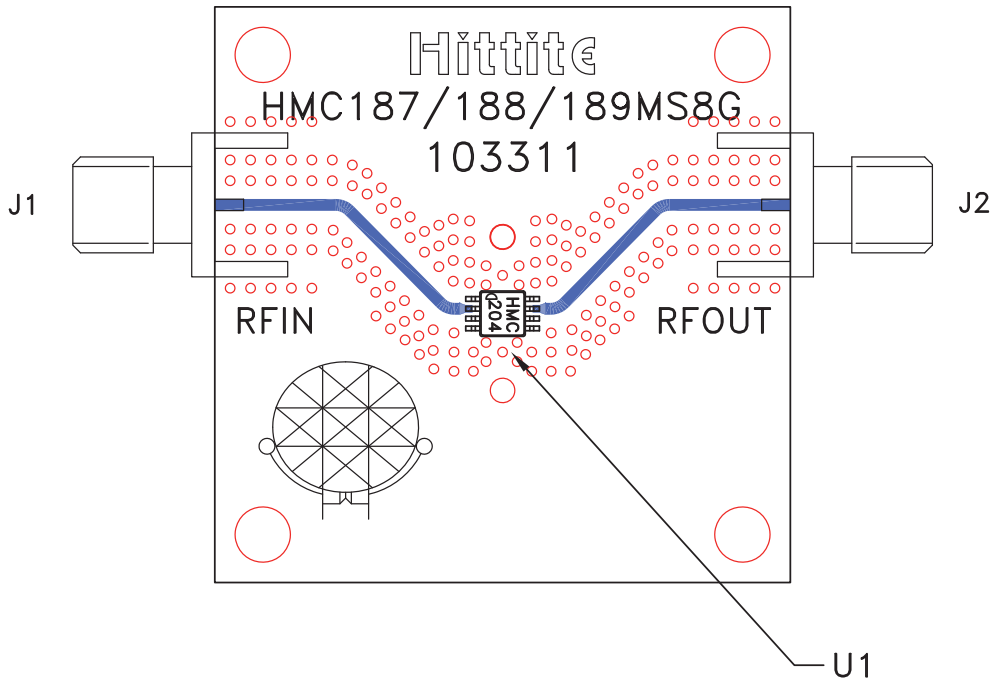

List of Materials for Evaluation PCB 103313 [1]

| Item | Description |
|---------|--------------------------|
| J1, J2 | PCB Mount SMA Connector |
| U1 | HMC204MS8G / HMC204MS8GE |
| PCB [2] | 103311 Eval Board |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should be generated with proper RF circuit design techniques. Signal lines at the RF port should have 50 ohm impedance and the package ground leads and exposed ground paddle should be connected directly to the ground plane similar to that shown above. The evaluation circuit board shown above is available from Hittite Microwave Corporation upon request.