

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

MATERIAL

Anodised aluminium

COLOUR

Natural, matte finish.

ROTATING PIN

AISI 304 stainless steel.




STANDARD EXECUTION

Pass-through holes for countersunk head screws.

ROTATION ANGLE (APPROXIMATE VALUE)

Max 270° (-90° and +180° being 0° the condition where the two inter-connected surfaces are on the same plane).

Do not exceed the rotation angle limit so as not to prejudice the hinge mechanical performance.

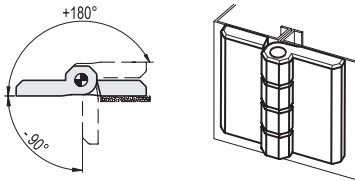

Conversion Table	
1 mm = 0,039 inch	
▼	
mm	inch
40	1.57
50	1.97
60	2.36

METRIC

Code	Description	L	d3	d4	f	H	h1	h2	b1	d	△
428649	CMM-AL-40-SH-5	40	5.5	10.5	25	10.5	5.5	5	14	4	25
428651	CMM-AL-50-SH-5	50	5.5	10.5	30	12.5	6.5	6	17	6	50
428652	CMM-AL-50-SH-6	50	6.5	12.5	30	12.5	6.5	6	17	6	47
428655	CMM-AL-60-SH-8	60	8.5	16.5	36	16.5	8.5	8	20.5	8	94