




TOP VIEW

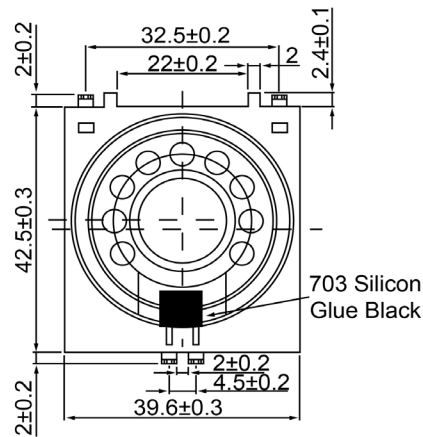

SIDE VIEW (1)

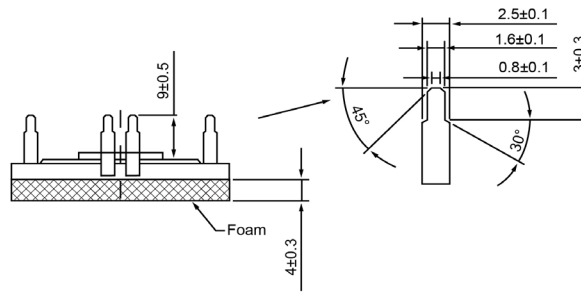

SIDE VIEW (2)

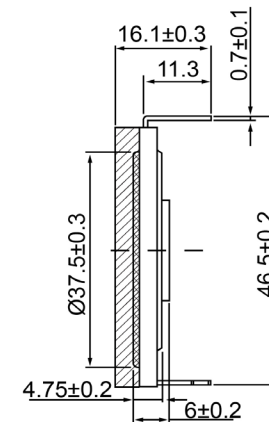

Specifications

Description	Value	Unit
Shape	Rectangle	
Resonant Frequency	600	(Hz)
Frequency Range	600 ~ 5,000	(Hz)
SPL @ 10cm	93	(dBA)
Impedance	8	(Ohm)
Cone Material	Polyetherimide	
Nominal Power	1.0	(W)
Max Power	1.5	(W)
Mount Type	Thru Hole	
Operating Temperature	-40 ~ +85	°C
Storage Temperature	-40 ~ +85	°C
Weight	9	(g)

Notes

- 1) All dimensions are in mm unless otherwise noted
- 2) All parts meet RoHS



Revision History

Version	Description	Date	Approved		
1	Released from Engineering	2/8/2014	J.S.		
Drawn by	Date	Checked by	Date	Approved by	Date
G.W.	1/27/2014	C.E.	2/5/2014	J.S.	2/8/2014

High Temp Dynamic Speaker

SM420608-1