


DEVICE NAME : BUB 0641 RD(G)(H)

Date : 02/16/2006

Mechanical Data :

ISSUED BY : De Pan

Rev Date : Index #:

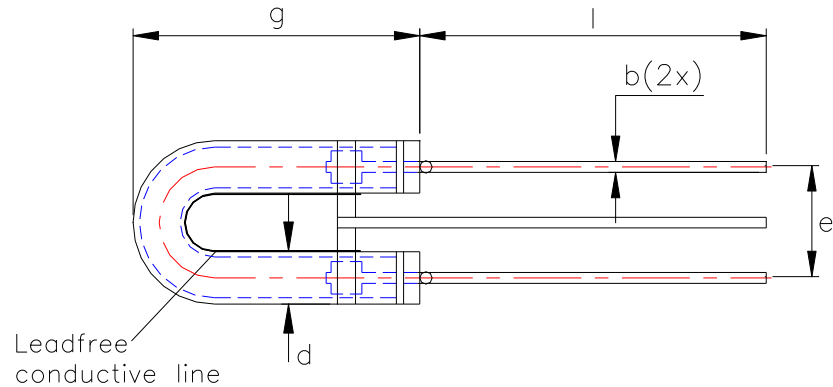

Dimension(mm)

e	10 ± 1	l	40 ± 2	d	6 ± 0.5 dia
r		g	30 ± 2	x	
b	0.8 ± 0.1 dia				

Polarity :

Without Colour Corrective Coating :

Remarks:

1. Envelope material : B1
2. RoHS Compliant
3. Reference no. : 96322429

Device Name :

BUB 0641 RD(G)(H)

Operating Data :

Max. Power Pmax/W	6	Trigger coil TR	ZS 1052 (H)
Nom. Power Pnom / W		Trigger capacitor Cz/μF	0.22
Max. flashenergy Emax/Ws	6	Min. trigger voltage Uz min/V	150
Nom. flashenergy Enom/Ws		Trigger contact S	Triac
Max. anode voltage Uamax/V	550	Flash frequency/Hz	0.4 - 4
Nom. anode voltage Uanom/V	500	Life/Number of flashes/N	5 x 10p6
Min. anode voltage Uamin/V	200	Repetition rate trep/ s	
Nom.flash capacitor CB/μF		Sec trigger voltage Uz sec / KV	- 5.6
Light reduction after life/ %		(Unloaded)	

Remarks :

Excelitas Proprietary & Confidential

HS-DDC-H24-0003

Excelitas

www.excelitas.com