






TOP VIEW

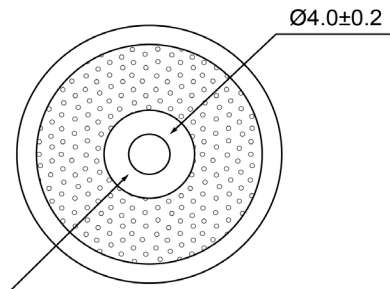

SIDE VIEW

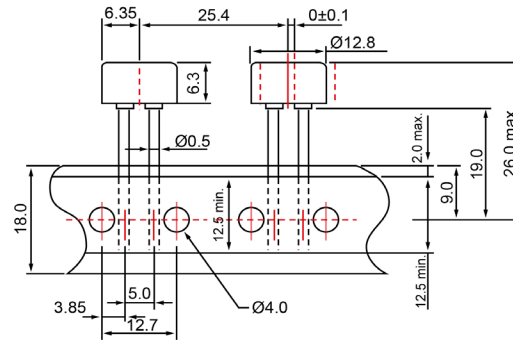

Specifications			Notes	Revision History					
Description	Value	Unit		Version	Description	Date	Approved		
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering	10/21/2013	J.S		
Resonant Frequency	4000	(Hz)							
Rated Voltage	3	(V)							
SPL @ 10cm	75	(dBA)							
Capacitance	12,000	(pF)							
Mount Type	Thru Hole								
Voltage Range	1 ~ 30	(V)							
Max Rated Current	5	(mA)							
Housing Material	PBT								
Operating Temperature	-20 ~ +70	°C							
Storage Temperature	-20 ~ +70	°C							
Weight	0.65	(g)							
 DB UNLIMITED						TP124003-3			
									
			Drawn by A.B. Date 10/21/2013 Checked by C.E. Date 10/21/2013 Approved by J.S. Date 10/21/2013						