


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: 9383COLOR
INSULATOR: POLYPROPYLENE. AVAILABLE IN BLK, RED, YEL, GRN, BLU & WTE.
FRAME: NICKEL PLATED BRASS.
CONTACT SPRING: NICKEL PLATED BERYLLIUM COPPER.
- P/N: W-600/COLOR
18AWG TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
- PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

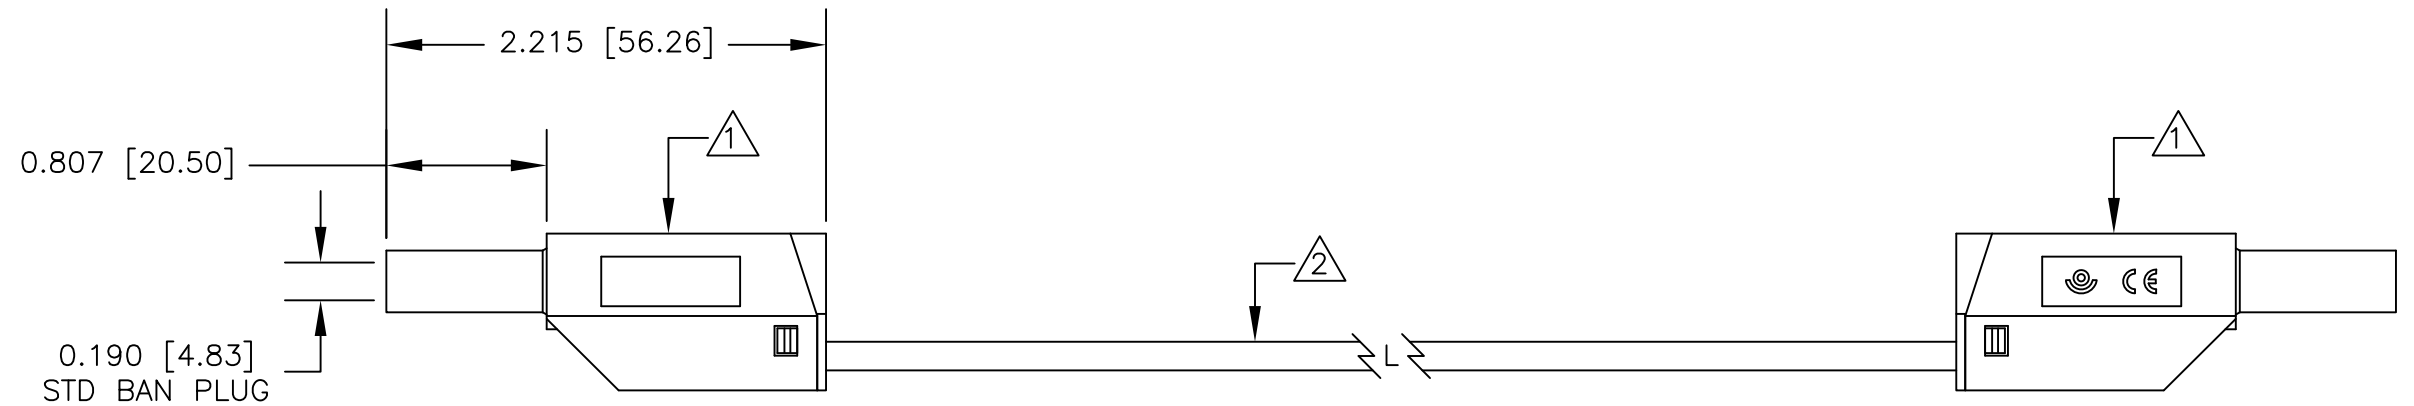

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L.	10/12	
			APPROVED BY			
NEXT ASSY		USED ON			DESCRIPTION STK SHRD BAN PLUG (9383) JUMPER	
		FINISH SEE NOTE.	SIZE	CODE IDENT NO.	DRAWING NO.	REV.
APPLICATION		DO NOT SCALE DRAWING	B	08505	9902	
			SCALE	1:1		SHEET 1 OF 1