



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

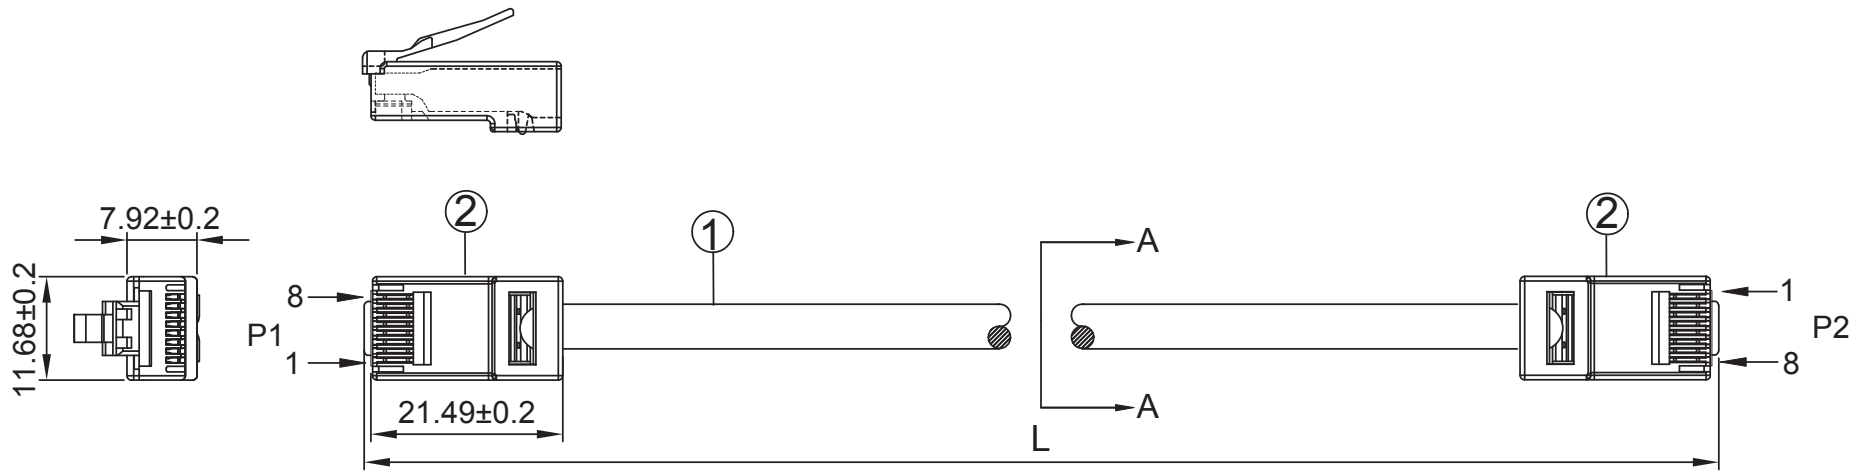

INK MARKING <FP2047> : YFC CAT.6 UTP ISO/IEC 11801 & EN 50288 & ANSI/TIA-568.2-D ETL/3P  
 VERIFIED ▲ 24AWGX4P PATCH TYPE CMX(UL) E164469-XX

Jacket Color
BK012
BU608
GN509
GY177
OR307
RD220
PU720
RD210
WH928
YE406



INSULATION:HDPE Thickness:0.2±0.05MM  
 OD=0.9±0.05mm

JACKET:PVC Thickness:0.6±0.1MM  
 OD=5.3±0.2mm

CONDUCTOR:[24AWG(7/0.175±0.008mm) BC]X4P

Operation Temperature:-20°C~+60°C

conductor resistance:120↓(Ω/Km) at 20°C

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

PINOUT		
P1	WIRE	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8

L(ft)	T(inch)	T(%)	L(ft)	T(inch)	T(%)
0.5	±0.6	10%	10	±2	1.67%
1	±1.2	10%	15	±3.15	1.75%
1.5	±1.2	6.67%	20	±4	1.67%
2	±1.2	5%	25	±4	1.33%
3	±1.2	3.33%	50	±6	1.0%
4	±1.2	2.5%	75	±6	0.67%
5	±1.2	2%	100	±6	0.5%
6	±1.2	1.67%	150	±6	0.33%
7	±2	2.38%	200	±6	0.25%

**CABLEMAX**



②	PLUG	8P8C 50U RJ45	2	PCS
①	CABLE	CAT.6 UTP PVC 24AWG*4P BC	A/R	M
NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT

Drawn By:	Date: 10 / 24 / 2022	Description: Cat.6 UTP Non-Booted Cables
Checked By:	Sheet 1 of 2	Model No. CM-1001XXXXBSTK
Approved By:	Scale 1:1	Rev. 01 Unit: mm


NOTE: CARTON MATERIAL MUST BE A=A

**Cable Part No. Color Guide** \*Replace "XX" in the Part No. to the respective color code (e.x. CM-100100GNBSTK for a Green cable)

White = WT  
  Gray = GY  
  Black = BK  
  Blue = BL  
  Green = GN  
  Purple = PU  
  Yellow = YW  
  Orange = OR  
  Red = RD

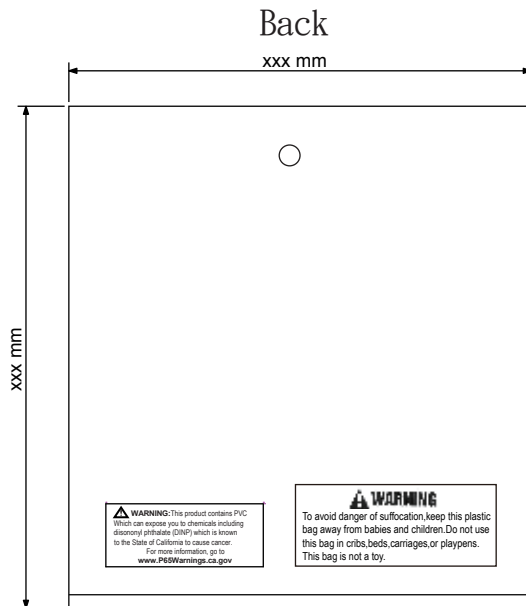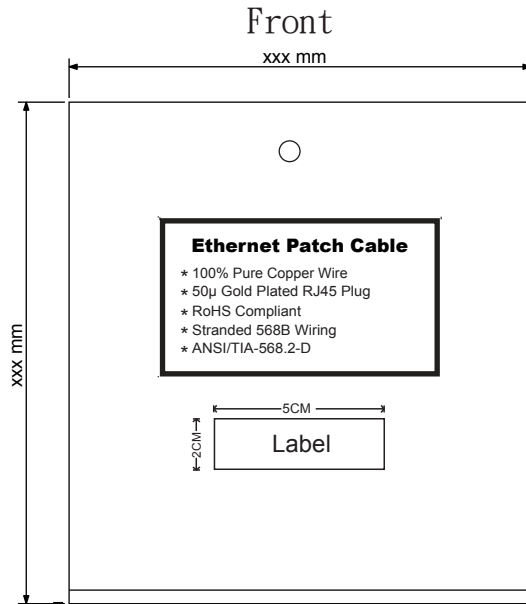

PE BAG SIZE(INCH)	PART NO.	length/FT	CARION SIZE(INCH)	Q'TY	G.W(LBS)
6.89x7.48	CM-100100XXBSTK	0.5	15.75x15.75x7.87	500	17.38
6.89x7.48	CM-100101XXBSTK	1	15.75x15.75x6.69	400	18.48
6.89x7.48	CM-100117XXBSTK	1.5	15.75x15.75x9.06	300	18.26
6.89x7.48	CM-100102XXBSTK	2	15.75x15.75x9.06	300	21.56
6.89x7.48	CM-100103XXBSTK	3	15.75x15.75x6.69	150	14.52
6.89x7.48	CM-100104XXBSTK	4	15.75x15.75x9.06	200	23.98
6.89x7.48	CM-100105XXBSTK	5	15.75x15.75x7.87	120	17.82
6.89x7.48	CM-100106XXBSTK	6	15.75x15.75x9.06	150	25.52
6.89x7.48	CM-100107XXBSTK	7	15.75x15.75x7.87	120	23.32
6.89x7.48	CM-100108XXBSTK	10	15.75x15.75x7.87	100	26.62
6.89x9.06	CM-100109XXBSTK	15	15.75x15.75x7.87	70	27.28
6.89x7.48	CM-100109XXBSTK	15	15.75x15.75x7.87	70	27.28
6.89x9.06	CM-100110XXBSTK	20	15.75x15.75x9.06	60	30.36
6.89x9.06	CM-100111XXBSTK	25	15.75x15.75x9.06	50	31.46
9.25x10.63	CM-100112XXBSTK	50	15.75x15.75x9.06	25	31.02
9.25x11.81	CM-100113XXBSTK	75	15.75x15.75x9.06	20	36.74
9.25x11.81	CM-100113XXBSTK	100	15.75x15.75x10.24	20	48.4

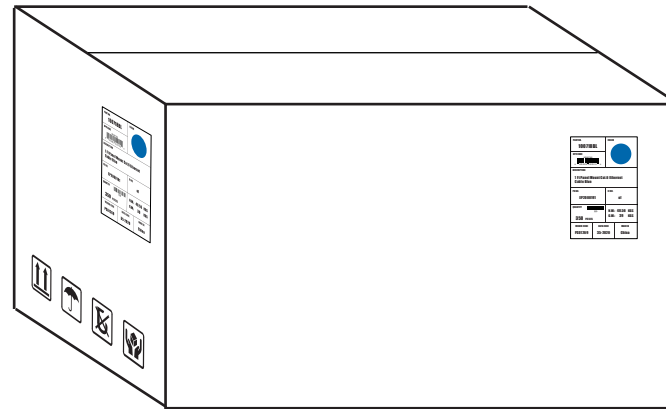

Drawn By:	Date: 10 / 24 / 2022	Description: Cat.6 UTP Non-Booted Cables
Checked By:	Sheet 2 of 2	Model No. CM-1001XXXXBSTK
Approved By:	Scale 1:1	Rev. 01    Unit: mm