

Fuse module, 3 fuse cartridges for 5x20 micro-fuses, Individually switched, Screw connection, Mounting type: Mounting rail TS 35

Business data

| | |
|--|---------------|
| Article number | 5712.2 |
| Article name | SM 3-E |
| GTIN (EAN) | 4044211069186 |
| Packaging unit | 1 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 60.6 g |
| Weight per piece (including packaging) | 75.28 g |
| Unit of weight | G |
| Customs number | 85363010 |
| Country of origin | NL |
| Product description | Fuse modules |

Technical data

Dimensions

| | |
|------------------|-------|
| Length | 87 mm |
| Width | 24 mm |
| Height TS 35/7.5 | 77 mm |

Ratings

| | |
|----------------------|-------|
| Current load, max. | 6,3 A |
| Overvoltage category | III |
| Contamination degree | 2 |

Connection data

| | |
|--|---------------------|
| Connection principle | Screw connection |
| Wire cross-section single core (rigid), min. | 0.2 mm ² |
| Wire cross-section single-core (rigid), max. | 4 mm ² |
| Wire cross-section stranded, min. | 0.2 mm ² |
| Wire cross-section stranded, max. | 2.5 mm ² |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm ² |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm ² |
| Stripping length | 7 mm |
| Torque | 0.6 Nm |

Input data

| | |
|--------------------------------|-------|
| Max. operating voltage AC/DC | 250 V |
| Current load per channel, max. | 4 A |
| Number of channels | 3 |

Materials

| | |
|---------------------------|--------|
| Working temperature, min. | -20 °C |
| Working temperature, max. | 50 °C |

Further technical data

| | |
|-----------|---------|
| Fuse size | 5x20 mm |
|-----------|---------|

Environmental Product Compliance

| | |
|--------------------------------|------------|
| REACH Conform | yes |
| REACH Reference date | 2022-06-10 |
| REACH Candidate Substance Note | No |
| RoHS Conform | yes |

Data sheet

5712.2 SM 3-E





Approvals

Standards and regulations

Standards / specifications

DIN VDE 0110 / EN 50178

Media

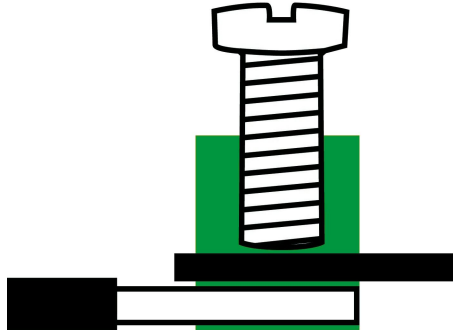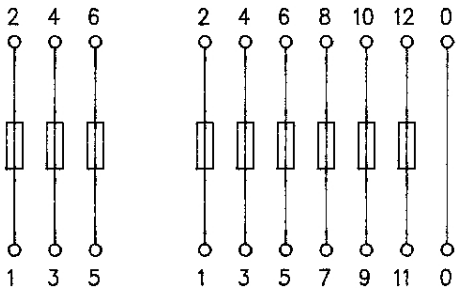

Accessories
