



## AirLink® LX60 Dual Ethernet LTE Router

### BENEFITS

- Out-of-Box LTE Connectivity: Add LTE connectivity to your existing equipment
- Enables edge processing with optional secure linux-based embedded application framework (ALEOS Application Framework)
- Dual Ethernet, RS232 & RS485 and multiple I/O to connect to a wide variety of field equipment
- LTE and LTE-M/NB-IoT variants for global deployments, and extended coverage and depth (in-building and below ground) to reach challenging locations
- Integrated 7-36VDC industrial grade power supply and -30C to +65C temperature range to provide superior reliability without need for additional power conditioning or adapters
- ALMS Cloud or AMM On-Premises Management single-pane device management across all devices
- GNSS for fleets

### IDEAL APPLICATIONS

Primary or backup connectivity for:

- IoT/M2M
- WAN Failover Applications
- Building Automation
- Digital Signage
- Taxis, Light Transport Vehicles
- ATMs, Kiosks, Point of Sale, Lottery

## Dual Ethernet LTE Router, for Primary or Backup Connectivity

The AirLink® LX60 is designed for Commercial and Enterprise LTE network connectivity. Dual Gigabit Ethernet and serial ports make it ideal to connect machines and provide primary or backup network connectivity.


LX60 provides purpose-built, secure, reliable, managed Cellular LTE networking in Building Automation, Digital Signage, Taxis, ATMs, Kiosks and Point-of-Sale terminals.

As part of the AirLink Essential series, the LX60 is designed to meet the environmental and performance requirements of these applications, while delivering superior reliability and uninterrupted operation in fixed, indoor and protected outdoor environments.

LX60 is available with optional Wi-Fi + GNSS and rated for shock, vibration and vehicle power supplies. It offers Dual Band 802.11ac Wi-Fi and dedicated 48 Channel GNSS, meeting the demands of Commercial fleets and Taxis requiring connectivity.

The LX60 comes in LTE Cat 4 regional variants, and a Global LPWA (Low-Power Wide Area) variant offering LTE-M/NB-IoT for applications where low data rates, enhanced cellular coverage and global deployment is required.

## Purpose-Built, Secure, Reliable, Managed Cellular LTE Networking

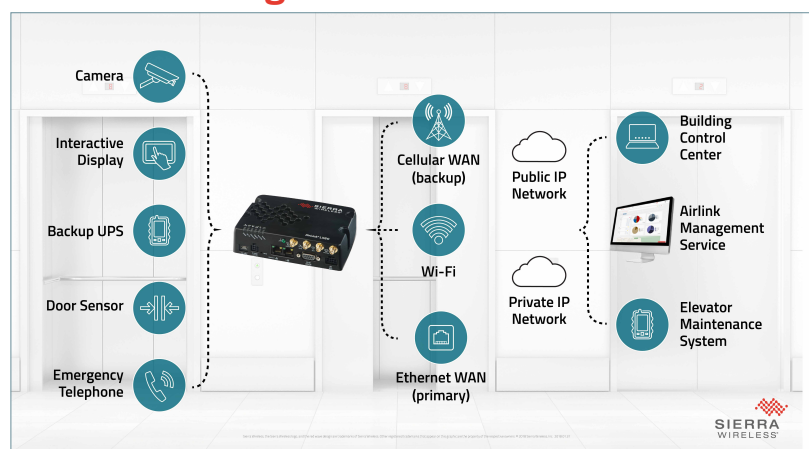

Application Example - Building Automation

# AirLink® LX60

## Dual Ethernet LTE Router

LX60				
	North America	EMEA	Australia & New Zealand	Global
	LTE			LTE-M/NB-IoT
<b>LTE CATEGORY</b>	Cat-4 (WP7610)	Cat-4 (WP7607)	Cat-4 (WP7609)	Cat-M1/NB1 (WP7702)
<b>Peak D/L</b>	Up to 150 Mbps	Up to 150 Mbps	Up to 150 Mbps	Cat-M1: 300kbps Cat-NB1: 27kbps
<b>Peak U/L</b>	Up to 50 Mbps	Up to 50 Mbps	Up to 50 Mbps	Cat-M1: 375kbps Cat-NB1: 65kbps
<b>4G LTE</b>	1900(B2), AWS(B4), 850(B5), 700(B12), 700(B13), 700(B17), 1700(B66)	2100(B1), 1800(B3), 2600(B7), 900(B8), 800(B20), 700(B28)	2100(B1), 1800(B3), 850(B5), 2600(B7), 900(B8), 700(B28)	2100(B1), 1900(B2), 1800(B3), AWS(B4), 850(B5), 900(B8), 700(B12), 700(B13), 700(B17), 850 (B18), 850(B19), 800(B20), 850(B26), 700(B28)
<b>3G WCDMA/HSPA+</b>	1900(B2), AWS(B4), 850(B5)	2100(B1), 900(B8)	2100(B1), 850(B5), 900(B8)	
<b>2G GSM/GPRS</b>		900, 1800		850, 900, 1800, 1900
<b>APPROVALS</b>				
<b>Regulatory</b>	FCC, IC, PTCRB	GCF, CE	GCF, RCM	FCC, IC, PTCRB, GCF, CE
<b>Carrier</b>	Verizon, AT&T		Planned: Telstra	Verizon (Cat-M1), AT&T (Cat-M1)
<b>PART NUMBER</b>	1104580 1104572 (Wi-Fi + GNSS) 1104493 (Wi-Fi + GNSS + Telemetry)	1104046 1104047 (Wi-Fi + GNSS)	1104048 1104049 (Wi-Fi + GNSS)	1104030



	Specification
<b>HOST INTERFACES</b>	2 Gigabit RJ-45 Ethernet ports RS-232 serial port (DB-9) USB 2.0 Micro-B Connector 3 SMA antenna connectors (cellular, diversity, GNSS) 1 SMA for LTE-M version 1 RP SMA antenna connector (Wi-Fi) Active GNSS antenna support Aux Port (RS-485/GPIO)
<b>Wi-Fi (Optional)</b>	Dual Band 2.4/5GHz Wi-Fi 802.11 b/g/n/ac (Wave2 Client Mode) Support for 10 clients, WPA2 Enterprise Output power 16dBm Access Point or Client Mode (Wi-Fi as WAN) Single SSID Support Captive Portal
<b>INPUT/OUTPUT</b>	Configurable I/O (5 pins total) <ul style="list-style-type: none"> <li>5 Digital Inputs: ON Voltage: 2.7 to 36 VDC</li> <li>1 Digital Open Collector Output &gt; sinking 300 mA</li> <li>3 Analog Inputs: 0.5-5/0.5-10 VDC (range selectable)</li> <li>Configurable Pull-ups for dry contact input</li> </ul>
<b>LAN (ETHERNET/USB)</b>	DHCP Server IP Passthrough VLAN Host Interface Watchdog PPPoE
<b>SERIAL</b>	TCP/UDP PAD Mode Modbus (ASCII, RTU, Variable) PPP DNP3 Interoperability
<b>NETWORK AND ROUTING</b>	Network Address Translation (NAT) Port Forwarding NEMO/DMNR VRRP Reliable Static Route
	Ethernet WAN Verizon PNTM IPv6 Gateway Policy Routing Dynamic DNS

	Specification
<b>SECURITY</b>	Remote Authentication (LDAP, RADIUS, TACACS+) DMZ Inbound and Outbound Port filtering Inbound and Outbound Trusted IP MAC Address Filtering PCI compatible Secure Firmware Update
<b>SATELLITE NAVIGATION GNSS (OPTIONAL)</b>	Dedicated GNSS Receiver supporting GPS, GLONASS, BeiDou, Galileo Tracking Sensitivity: -162 dBm Accuracy: < 1.5m (50%), < 3.15m (95%) Acquisition Time: 1s Hot Start Reports: NMEA 0183 V3.0, TAIP, RAP, XORA Multiple Redundant Servers Reliable Store and Forward
<b>NETWORK MANAGEMENT</b>	Secure mobile network & asset management application available in the cloud or licensed platform in the enterprise data center Fleet wide firmware upgrade delivery Router configuration and template management Router staging over the air and local Ethernet connection Over-the-air software and radio module firmware updates Device Configuration Templates Configurable monitoring and alerting Remote provisioning and airtime activation (where applicable)
<b>EVENTS ENGINE</b>	Custom event triggers and reports Configurable interface, no programming Event Types: Digital Input, Network Parameters, Data Usage, Timer, Power, Device Temperature and Voltage Report Types: RAP, SMS, Email, SNMP Trap, TCP (Binary, XML, CSV) Event Actions: Drive Relay Output
<b>ENVIRONMENTAL</b>	Operating Temperature: -30°C to +65°C / -22°F to +149°F Storage Temperature: -40°C to +85°C / -40°F to +185°F Humidity: 90% RH @ 60°C Military Spec MIL-STD-810G conformance to shock, vibration, thermal shock, and humidity IP20 rated ingress protection

	Specification
<b>VPN</b>	IPsec, GRE, and OpenVPN Client Up to 5 concurrent tunnels Split Tunnel Dead Peer Detection (DPD)
<b>ROUTER MANAGEMENT</b>	Local web user interface AT Command Line Interface (Telnet/SSH/Serial) SNMP SMS Commands
<b>APPLICATION</b>	ALEOS Application Framework (AAF) Lua Scripting Language
<b>POWER</b>	Input Voltage: 7 to 36 VDC Low voltage disconnect to prevent battery drain Built-in protection against voltage transients including 5 VDC engine cranking Ignition Sense with time delay shutdown
<b>DIMENSIONS</b>	146 mm x 42 mm x 100 mm (106 mm including connectors) 5.74 in x 1.65 in x 3.93 in (4.17 in including connectors) 250g (weight)

\*For carrier specific band support please refer to the hardware user guide.

## DIMENSIONS

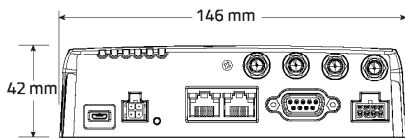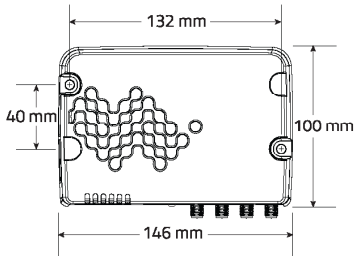

	Specification
<b>INDUSTRY CERTIFICATIONS</b>	Safety: IEC Certification Bodies Scheme (CB Scheme), UL 60950 Vehicle Usage: ISO7637-2, SAE J1455 (Shock, Vibration, Electrical) Environmental: RoHS2, REACH, WEEE Hazardous Environments: Class 1 Div 2 - Ambient temperatures of -30°C to +60°C Environmental: RoHS2, REACH, WEEE
<b>SUPPORT AND WARRANTY</b>	Includes 1st Year AirLink Complete: <ul style="list-style-type: none"> <li>AirLink Management Service (ALMS)</li> <li>Direct 24/7 Technical Support</li> <li>3-year standard warranty; optional 2-year warranty extension</li> </ul> 1-day Accelerated Hardware Replacement available through participating resellers
<b>ACCESSORIES</b>	In the box: DC Power Cable and Quick Start Guide Other Accessories (sold separately): 2000579 AC Adapter, 12VDC 6001110 Cellular Paddle Antenna 6001111 Wi-Fi 2.4/5Hz Paddle Antenna 6001214 DIN Rail Bracket 6001231 Panel Antenna (LPWA) For Antenna options visit: <a href="http://sierrawireless.com/antennas">sierrawireless.com/antennas</a>

## AirLink Networking Solution - Related Products

### AIRLINK NETWORK MANAGEMENT SOLUTIONS

#### AIRLINK MANAGEMENT SERVICE (ALMS)



- Secure, Cloud-based network and asset management
- Remotely deploy, configure, monitor and manage AirLink devices
- Carrier-grade, high availability, secure, global infrastructure


#### AIRLINK MANAGER / MOBILITY MANAGER (AM/AMM)



- Deployable in the enterprise data center (on-premises) or in the cloud
- Advanced, end-to-end network and asset management for both fixed and mobile networks.
- Remote, real-time configuration, control and troubleshooting of AirLink devices

### AIRLINK VPN APPLIANCE

#### AIRLINK CONNECTION MANAGER



- VPN appliance built from the ground up for Airlink routers & gateways
- Simplify deployment and management of your VPN solution, extending the enterprise to the network edge for fixed and mobile endpoints
- Carrier agnostic – ACM doesn't require fixed and/or public IP
- Compatible with FIPS 140-2, and always-on VPN capability

#### About Sierra Wireless

Sierra Wireless is building the Internet of Things with intelligent wireless solutions that empower organizations to innovate in the connected world. We offer the industry's most comprehensive portfolio of 2G, 3G, and 4G embedded modules and gateways, seamlessly integrated with our secure cloud and connectivity services. OEMs and enterprises worldwide trust our innovative solutions to get their connected products and services to market faster.

For more information, visit [www.sierrawireless.com](http://www.sierrawireless.com).