


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm ²]	TAB SIZE INCH [mm]	HOUSING COLOR	DIMENSIONS in. [mm]	
				L ± .03 [0,8]	MAX WIRE INSULATION DIA.
EDV18-250M	#22-18 [0,5-1,0]	.250 X .032 [6,3 X 0,8]	RED	.98 [24,9]	.154 [3,91]
EDV14-250M	#16-14 [1,5-2,5]		BLUE	.96 [24,3]	.180 [4,57]

NOTES:

- CSA CERTIFIED FOR:
 - STRANDED COPPER WIRE ONLY
 - 221°F (105°C) MAX TEMP RATING
 - 600V MAX VOLTAGE
- MATERIAL:
 - STAMPING: .031" (0.8) THK COPPER, NICKEL PLATED
 - HOUSING: VINYL
- INSTALLATION TOOLS: CT-500, CT-550, CT-1550, CT-1551
- WIRE STRIP LENGTH $9/32'' \begin{matrix} +1/32 \\ -0 \end{matrix}$ [7,1mm $\begin{matrix} +0.8 \\ -0 \end{matrix}$]
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

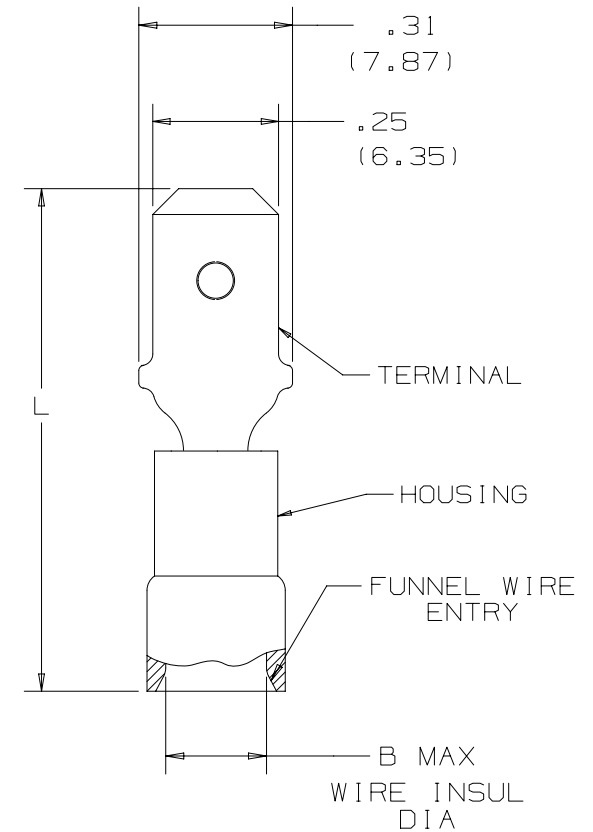

CERTIFIED LR31212

TITLE STRONGHOLD MALE DISCONNECT (250 SERIES) VINYL INSULATED, BRAZED SEAM #22-14 AWG CUSTOMER DRAWING					
ITEM REVISION NAME 00123SHZ/00					
DATASET FILE NAME 00123SHZ/00					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °					MATERIAL: SEE NOTES
THIRD ANGLE PROJECTION					DRAWING NUMBER: SH41405
DRAWN BY JHNU	DATE 2/18	CHK TMR	SCALE NTS	SHT 1 OF 1	SIZE A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

D10100DA/20