


PROPRIETARY INFORMATION:
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR
USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY
PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 16087, EM	04/28/09	BS

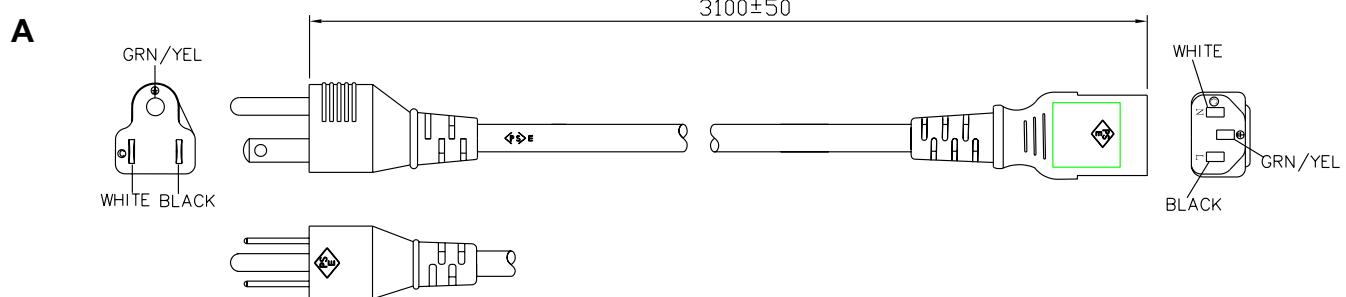

GENERAL SPECIFICATIONS:

RATING:	7A / 125V AC
CABLE TYPE / SIZE:	VCTF 3 x 0.75 MM ²
TEMPERATURE RATING:	75° C MIN.
CONDUCTOR COLORS:	BLACK / WHITE / GREEN
CABLE JACKET COLOR:	BLACK
OVERALL LENGTH (L):	3100 ± 50 mm
CABLE OUTER DIAMETER:	7.0 ± 0.15 mm
END 'A' PLUG;	JIS 8303 JAPAN PLUG
END 'B'	IEC 320 / C13
APPROVALS PLUG:	MITI or PSE
APPROVALS CABLE:	MITI or PSE
APPROVALS CONNECTOR:	MITI or PSE

2. PACKING:

BULK PACKED, BUNDLES OF 25.
MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.



NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek products are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
			TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005	
			MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013	
INIT.BY: EM	DATE: 04/28/09			DWG TITLE: JAPANESE DETACHABLE CORDSET
DRAWN: NF	DATE: 04/28/09	FSCN No.: G, CC	SIZE A	REV. A
APRVD: HM	DATE: 04/28/09	SCALE: NONE	PART NO: 30033110F0701(R)	SHEET 1/1

GlobTek, Inc.
www.globtek.com

186 Veterans Dr. Northvale, NJ 07647
Tel. 201-784-1000 Fax 201.784.0111