

6

5

4

3


2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/27/21	
A		UPDATE SPEC.	9/6/22	LH/AC1

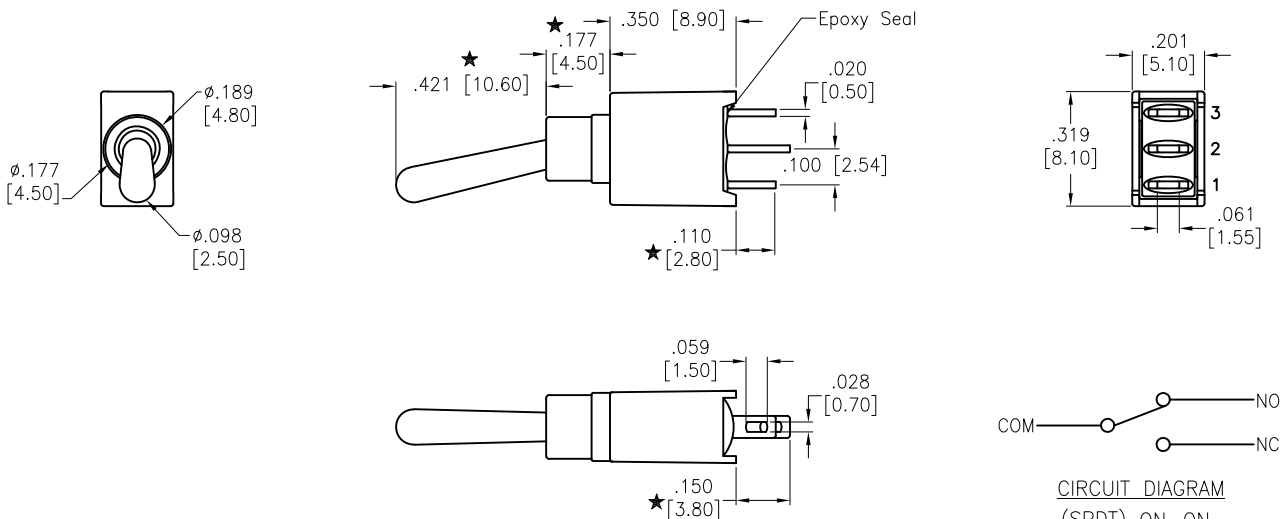

SW-T3-2B-A-T3-X-05

Coding	(Internal) Movable Contact	Terminal Plating
S	Silver Plated	Silver (Gold over silver Term.)
T		Silver (Tin over silver Term.)
R	Gold Plated	Gold Plated
K		Gold Plated (Tin Plated Term.)

SPECIFICATIONS:

Material:
 Movable contact: Copper Alloy, See Chart
 Terminals: See Chart
 Electrical:

Rating: 3 Amps with resistive load @ 125VAC or 28VDC
 1.5 Amps with resistive load @ 250VAC
 Contact resistance: 20 mohms max initial
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1500V RMS @ sea level
 Electrical life: 30,000 make and break cycles at full load
 Temperature Rating:
 Operating temperature: -30°C to +85°C
 Environmental:

IP Class: IP67
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.x	± .10	Øx	± .10
.xx	± .020	Øxx	± .015
.xxx	± .015	Øxxx	± .010



909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

DRAWN	JJ	9/27/21
CHECKED	RC	9/27/21
APPROVED		

TITLE POWER TOGGLE SWITCH, TOGGLE
 SUB-MINIATURE, SPDT, ON-ON, SOLDER TYPE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

SIZE X	PART NO. SW-T3-2B-A-T3-X-05	REV. A
-----------	--------------------------------	-----------

REF: S00198T SCALE: NTS SHEET 1 OF 1

6

5

4

3

2

1