


LED MOUNTS/SPACERS

T-1³/₄ (5mm) Nylon Strip Mounts

- Station Mounts Assure Even Spacing and Elevation
- Provides Entire Array Positioning
- May be Cut for Use from 2 to 15 Stations
- Molded from Natural Nylon per ASTM D-4066
- Made from 94V-2 Rated Nylon

12 Station Mount T-1³/₄ (5mm) LEDs

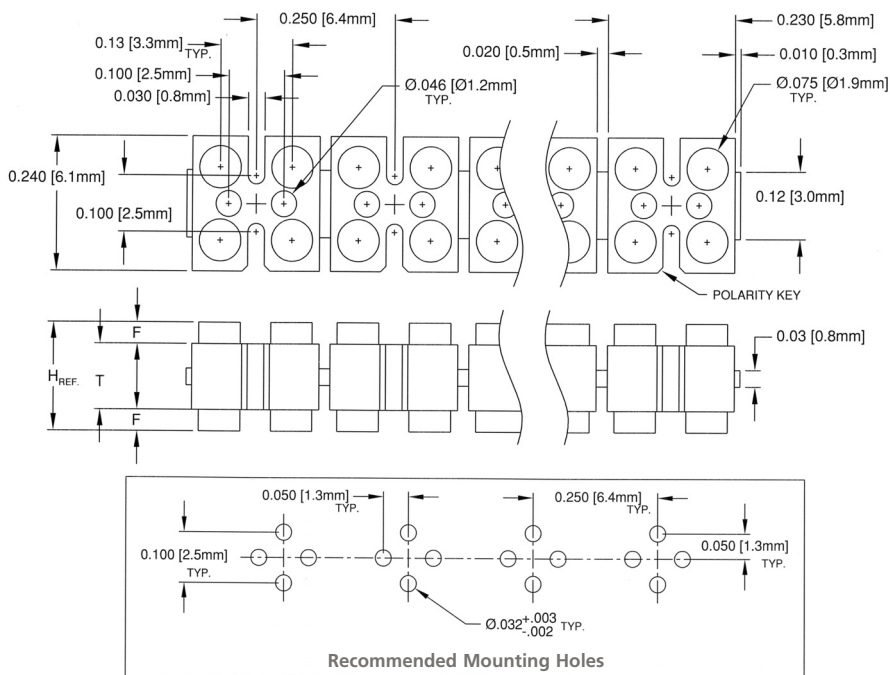

T-175 Series

Color: Natural, Price Code: D

| Part No. | H | T | F |
|-----------|------------|------------|------------|
| T-175-060 | .060 (1.5) | .040 (1.0) | .010 (.25) |
| T-175-070 | .070 (1.8) | .040 (1.0) | .015 (.38) |
| T-175-080 | .080 (2.0) | .040 (1.0) | .020 (.51) |
| T-175-090 | .090 (2.3) | .040 (1.0) | .025 (.64) |
| T-175-100 | .100 (2.5) | .040 (1.0) | .030 (.76) |
| T-175-110 | .110 (2.8) | .040 (1.0) | .035 (.89) |
| T-175-120 | .120 (3.0) | .040 (1.0) | .040 (1.0) |
| T-175-130 | .130 (3.3) | .040 (1.0) | .045 (1.1) |
| T-175-140 | .140 (3.6) | .040 (1.0) | .050 (1.3) |
| T-175-150 | .150 (3.8) | .040 (1.0) | .055 (1.4) |
| T-175-160 | .160 (4.1) | .040 (1.0) | .060 (1.5) |
| T-175-170 | .170 (4.3) | .040 (1.0) | .065 (1.7) |
| T-175-180 | .180 (4.6) | .040 (1.0) | .070 (1.8) |
| T-175-190 | .190 (4.8) | .040 (1.0) | .075 (1.9) |
| T-175-200 | .200 (5.1) | .040 (1.0) | .080 (2.0) |
| T-175-210 | .210 (5.3) | .040 (1.0) | .085 (2.2) |

T-176 Series

Color: Natural, Price Code: D

| Part No. | H | T | F |
|-----------|------------|------------|------------|
| T-176-200 | .200 (5.1) | .150 (3.8) | .025 (.64) |
| T-176-210 | .210 (5.3) | .150 (3.8) | .030 (.76) |
| T-176-220 | .220 (5.6) | .150 (3.8) | .035 (.89) |
| T-176-230 | .230 (5.8) | .150 (3.8) | .040 (1.0) |
| T-176-240 | .240 (6.1) | .150 (3.8) | .045 (1.1) |
| T-176-250 | .250 (6.4) | .150 (3.8) | .050 (1.3) |
| T-176-260 | .260 (6.6) | .150 (3.8) | .055 (1.4) |
| T-176-270 | .270 (6.9) | .150 (3.8) | .060 (1.5) |
| T-176-280 | .280 (7.1) | .150 (3.8) | .065 (1.7) |
| T-176-290 | .290 (7.4) | .150 (3.8) | .070 (1.8) |
| T-176-300 | .300 (7.6) | .150 (3.8) | .075 (1.9) |
| T-176-310 | .310 (7.9) | .150 (3.8) | .080 (2.0) |
| T-176-320 | .320 (8.1) | .150 (3.8) | .085 (2.2) |
| T-176-330 | .330 (8.4) | .150 (3.8) | .090 (2.3) |
| T-176-340 | .340 (8.6) | .150 (3.8) | .095 (2.4) |
| T-176-350 | .350 (8.9) | .150 (3.8) | .100 (2.5) |