

# AD-236u7

## Overview

---

**Frequency Band**

UHF 860 - 960 MHz

---

**Chip**

NXP UCODE 7

---

**Antenna Dimensions**

70 x 14.5 mm / 2.76 x 0.57 in

---

**International Standard**

ISO/IEC 18000-63 Type C

---

**Industry Segments**

Apparel  
Industrial Applications

---

**Applications**

Brand Protection  
Supply Chain Management  
Home Essentials

---

and n/a

---



## High performance on a multitude of items

AD-236u7 inlays from Avery Dennison are high performing Gen2 UHF RFID products that fully leverage the capabilities of NXP's UCODE 7 IC.

The product is suitable for a wide variety of RFID tagging applications, including Supply Chain, Inventory & Logistics, Apparel and Home Essentials.


AD-236u7 inlays are equipped with the UCODE 7 IC from NXP, featuring 128-bit of EPC memory and a 96-bit unique serialized TID Number. Available delivery formats comprise Dry Inlay, Wet Inlay and Label / Sticker.

Like all RFID products from Avery Dennison, AD-236u7 inlays are manufactured according to the industry's highest quality standards, as confirmed by the RFID Lab at Auburn University: The inspection body awarded Avery Dennison its first comprehensive and significant ARC accreditation for quality.


## Technical features

<b>Chip</b>	NXP UCODE 7		
<b>EPC and User Memory</b>	128-bit and n/a	128-bit and n/a	96-bit and n/a
<b>TID Memory</b>	96-bit / 48-bit unique serial number		
<b>Product Code</b>	RF600477	RF600480	RF100306
<b>Delivery Format</b>	Dry inlay	Wet inlay	Label / sticker
<b>Die-cut Dimension</b>	-	73 x 17.68 mm / 2.88 x 0.70 in	76 x 20 mm / 3 x 0.80 in
<b>Inlay Substrate</b>	PET	PET	-
<b>Face Sheet</b>	-	-	TT2C (FASSON®) Bright White
<b>Total Thickness</b>	9 - 10 mils / 229 - 254 microns	10 - 12 mils / 254 - 305 microns	10 - 13 mils / 254 - 330 microns
<b>Standard Pitch</b>	22.23 mm / 0.875 in	22.23 mm / 0.875 in	38.1 mm / 1.5 in
<b>Web Width</b>	95 mm / 3.75 in	76 mm / 3 in	82.6 mm / 3 in
<b>Core Size</b>	152 mm / 6 in	76 mm / 3 in	76 mm / 3 in
<b>Quantity / Reel</b>	40000 pcs/reel	10000 pcs/reel	3154 pcs/reel
<b>Operating Temperature</b>	-40 °C to 85 °C -40 °F to 185 °F		
<b>On-Metal</b>	Non metal		
<b>Certificate</b>	ARC		

## Orientation sensitivity

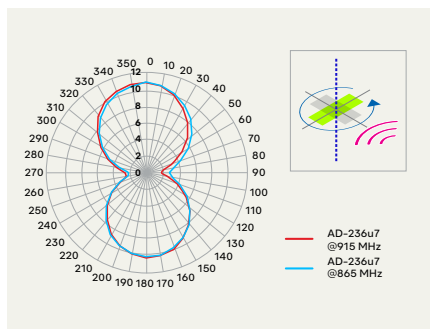

## Read range

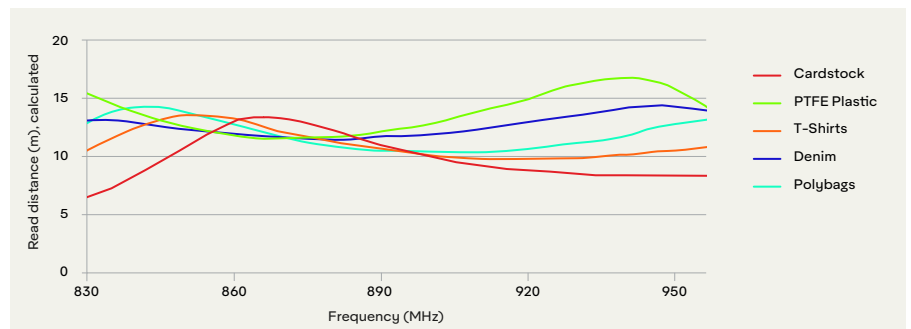

All graphs are indicative: performance in real life applications may vary.

## Contact information

[rfid.averydennison.com/contact](http://rfid.averydennison.com/contact)

North America: +1-866-903-7343 (toll free US)

International: +1-678-617-2359

RoHS

© 2021 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

**Warranty:** Please refer to Avery Dennison standard terms and conditions: [rfid.averydennison.com/termsandconditions](http://rfid.averydennison.com/termsandconditions)

**Care and handling:** RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

**Applications:** This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.

