



## 2 Way SMA Power Divider from 800 MHz to 2.4 GHz Rated at 20 Watts

### Power Dividers Technical Data Sheet

**PE20DV008**

#### Features

- 2-Way Power Divider
- Reactive Design
- 800 MHz to 2.4 GHz Frequency Range
- Max Power 20W (CW)
- Isolation > 20 dB

#### Applications

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

#### Description

Pasternack carries a wide selection of power dividers to fit your needs. These components are essential in many systems, allowing the combination of multiple signals or splitting of a single signal into multiple signals with equal magnitude and phase. Pasternack's resistive and reactive power dividers come with excellent performance featuring minimal loss, high isolation and low VSWR. They are available in both narrow and broad bandwidths with a variety of connector types. The PE20DV008 is a 2 way reactive power divider that operates from 800 MHz to 2.4 GHz and can handle up to 20 Watts (CW). This SMA power divider offers 20 dB min isolation and 1.3:1 max VSWR. The package interface uses SMA inputs on all of the ports.

#### Electrical Specifications

Design	Reactive
Number of Output Ports	2

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.8		2.4	GHz
Impedance		50		Ohms
Input VSWR			1.3:1	
Output VSWR			1.2:1	
Insertion Loss			3.4	dB
Isolation	20			dB
Amplitude Balance			±0.2	dB
Phase Balance			±2	Degrees
Input Power (CW)			20	Watts

Electrical Specification Notes:  
 Values at +25°C, sea level.  
 Insertion loss includes 3dB theoretical loss.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way SMA Power Divider from 800 MHz to 2.4 GHz Rated at 20 Watts PE20DV008](#)



2 Way SMA Power Divider from 800 MHz  
to 2.4 GHz Rated at 20 Watts

**Power Dividers Technical Data Sheet**

**PE20DV008**

**Mechanical Specifications**

**Size**

Length	1.38 in [35.05 mm]
Width	1.1 in [27.94 mm]
Height	0.39 in [9.91 mm]
Weight	0.053 lbs [24.04 g]

**Configuration**

Input Connector	SMA Female
Output Connectors	SMA Female

**Environmental Specifications**

**Temperature**

Operating Range	-55 to +125 deg C
-----------------	-------------------

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

2 Way SMA Power Divider from 800 MHz to 2.4 GHz Rated at 20 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way SMA Power Divider from 800 MHz to 2.4 GHz Rated at 20 Watts PE20DV008](#)




URL: <https://www.pasternack.com/2-way-sma-power-divider-2.4-ghz-pe20dv008-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE20DV008 CAD Drawing

2 Way SMA Power Divider from 800 MHz to 2.4 GHz Rated at 20 Watts

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
B	PCR	03/24/2022	SPONG

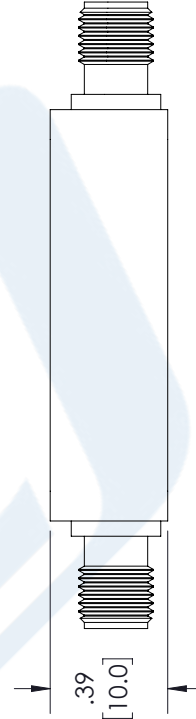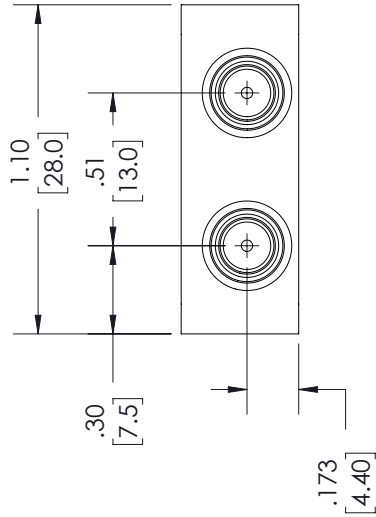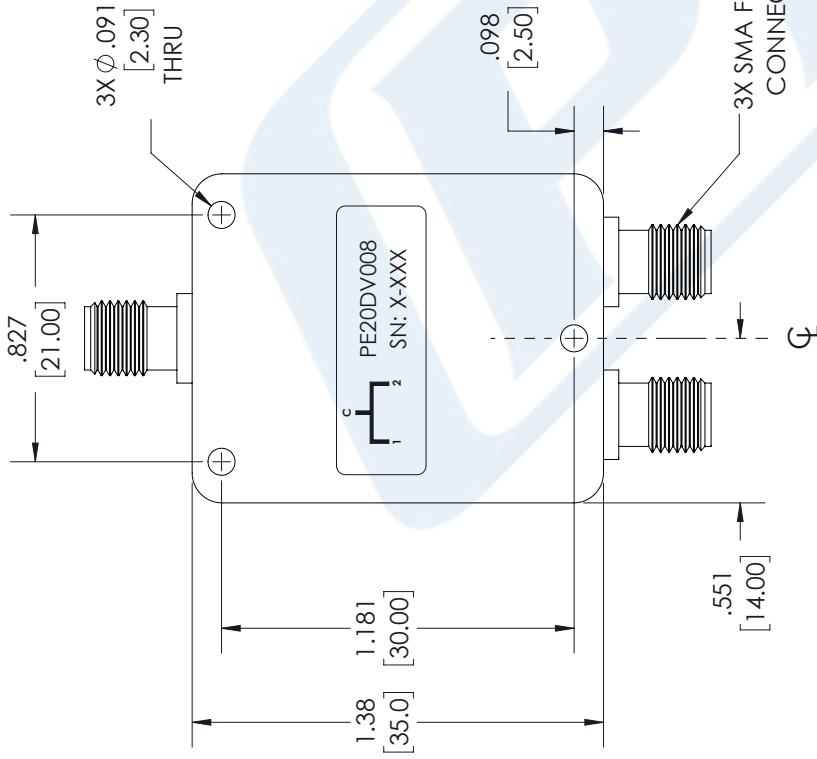

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
 .X = ±.2 [5.08] | FRACTIONS ± 1/32  
 .XX = ±.02 [.51] | ANGLES ± 1°  
 .XXX = ±.005 [.13]  
 CABLE LENGTH (L) TOLERANCES:  
 L ≤ 12 [305] = +1 [25] / -0  
 12 [305] < L ≤ 60 [1524] = +2 [51] / -0  
 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0  
 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0  
 300 [7620] < L = +5% L / -0

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

**PE PASTERNAK**  
an INFINITI® brand

Pasternack Enterprises, Inc.  
P.O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
Website: www.pasternack.com  
E-mail: sales@pasternack.com

SIZE: A CAGE CODE: 53919 DRAWN BY: BPUCHASKI ITEM NO.: PE20DV008 REV: B

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE: N/A