

Laser/Ink Jet Labels

Laser/Inkjet Labels

Panduit is a global leader in reliable and innovative solutions for identification and safety. Products are engineered for a wide variety of industrial applications – including electrical, electronics, industrial, and network. Panduit offers a complete leading-edge line of labeling software and high-performance label materials (all RoHS compliant) that provide enhanced productivity, dependability, and value to all infrastructure labeling requirements. Laser/Inkjet Labels are on 8.5" x 11" sheets.

*Representative offering only,
visit www.panduit.com for a
complete listing of products.*



Cable/Wire Labels

Turn-Tell® Labels.....	4
Self-Laminating Polyester Labels.....	5
Self-Laminating Tedlar® Labels.....	6
Self-Laminating Polyolefin Labels.....	6
LabelCore™ Fiber Optic Cable Identification System.....	7
Non-Laminated Polyolefin Labels.....	7

Component Labels

Polyester Component Labels.....	8
Silver Polyester Component Labels.....	9
Tamper-Evident Polyester Component Labels.....	9
Tedlar® Component Labels.....	9
Non-Adhesive Polyester Network Labels.....	10
Polyolefin Network Labels.....	10

Safety Labels

Polyester Safety Labels.....	11
Rigid Signs for use with Polyester Safety Labels.....	11
Rigid Safety Tags.....	12
Polyester Adhesive Safety Signs.....	12


Labeling Software

Easy-Mark Plus™ Software.....	13
CAD-Connect™ Software.....	13

Tedlar is a registered trademark of E. I. du Pont de Nemours and Company.

Turn-Tell® Labels

PATENTED



- Labels rotate and slide along cables after installation for visibility from any angle, and allow repositioning on the wire/cable to align legends for improved aesthetics
- Ideal for use in high-density or space-constrained cable applications
- Eliminate the need to disconnect wire or replace label in the event of re-termination
- Temperature range: -65°F to 225°F (-54°C to 107°C)



Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire/Cable Size Range	Labels Per Row	Labels Per Sheet	Labels Per Pkg.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
R050X075X1J	White	0.50	12.7	0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.1	Cat. 6 28 AWG / 18 – 14 AWG	12	84	5000
R050X125X1J				1.25	31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP / 12 – 10 AWG		60	
R050X150X1J				1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP / Cat. 6UTP / Cat. 6A UTP / Cat. 5e FTP / 10 – 6 AWG		48	
R100X075X1J	White	1.00	25.4	0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.1	Cat. 6 28 AWG / 18 – 14 AWG	6	42	2500
R100X125X1J				1.25	31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP / 12 – 10 AWG		30	
R100X150X1J				1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP / Cat. 6 UTP / Cat. 6A UTP / Cat. 5e FTP / 10 – 6 AWG		24	
R100X150X2J	TIA Blue														
R100X150X3J	TIA Green														
R100X150X7J	TIA Red														
R100X225X1J	White	2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP / Cat. 6A UTP / Cat. 6A FTP / 8 – 4 AWG	18	1000			
R100X225X2J	TIA Blue														
R100X225X3J	TIA Green														
R100X225X7J	TIA Red														
R100X225X8J	TIA Yellow														
R100X400X1J	White	1.50	38.1	4.00	101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG	4	12	500
R150X150X1J				1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP / 10 – 6 AWG		16	
R200X150X1J				2.00	50.8	2.25	57.2	0.75	19.1	0.28	7.1	0.39		9.9	
R200X225X1J	3	6													
R200X400X1J	White	4.00	101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG	6				

Order number of labels required in multiples of Standard Package Quantity.

Self-Laminating Polyester Labels



- Include a colored print-on area and clear over-laminate to protect the legend for clear and durable identification
- Labels are sized specifically for wire and cable applications
- Provide durability; high-temperature resistance, and dimensional stability; do not stretch or easily tear; preferred material for wire/cable labeling
- White labels are ASTM E-595 rated for airspace handling
- Temperature Range: -65°F to 225°F (-54°C to 107°C)
- For YAJ parts only: UL recognized, UL969, File # MH14979

Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire/Cable Size Range	Labels Per Row	Labels Per Sheet	Labels Per Pkg.	
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm					
S050X075YAJ	White	0.50	12.7	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	18 – 14 AWG	13	169	5000	
S050X125YAJ				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG		104		
S050X150YAJ				1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG		78		
S075X075YAJ		0.75	19.1	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	18 – 14 AWG	9	117	2500	
S075X125YAJ				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG		72		
S075X150YAJ				1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG		54		
S100X075YAJ		TIA Blue	1.00	25.4	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	18 – 14 AWG	7	91	2500
S100X125YAJ					1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG		56	
S100X150YAJ			1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	42				
S100X150YBJ	TIA Blue															
S100X150YCJ	TIA Brown															
S100X150YDJ	TIA Green															
S100X150YEJ	TIA Gray															
S100X150YFJ	TIA Orange															
S100X150YGJ	TIA Purple															
S100X150YHJ	TIA Red															
S100X150YIJ	TIA Yellow															
S100X225YAJ	White	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UPT/Cat. 6A FTP/8 – 4 AWG	8	32	1000	
S100X225YBJ	TIA Blue															
S100X225YCJ	TIA Brown															
S100X225YDJ	TIA Green															
S100X225YEJ	TIA Gray															
S100X225YFJ	TIA Orange															
S100X225YGJ	TIA Purple															
S100X225YHJ	TIA Red															
S100X225YIJ	TIA Yellow															
S100X400YAJ	White															1.00
S100X650YAJ	White	6.50	165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 – 350 MCM	7					
S150X400YAJ	White	1.50	38.1	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	5	14		
S150X400YIJ	TIA Yellow			4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG		14		
S200X150YAJ	White	2.00	50.8	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	4	24		
S200X225YAJ	White			2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UPT/Cat. 6A FTP/8 – 4 AWG		16		
S200X400YAJ	White			4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG		8		
S200X650YAJ	White			6.50	165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 – 350 MCM		4	500	

Order number of labels required in multiples of Standard Package Quantity.

Self-Laminating Tedlar® Labels



- Include a colored print-on area and clear over-laminate to protect the legend for clear and durable identification
- Labels are sized specifically for wire and cable applications
- Labels are self-extinguishing
- Temperature range: 0°F to 275°F (-18°C to 135°C)
- UL Recognized: UL969, File # MH 14576, CUL Recognized: C22.2 No 0.15-01, File # MH 14576

Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire/Cable Size Range	Labels Per Row	Labels Per Sheet	Labels Per Pkg.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
S100X150TAJ-A	White	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG	7	42	2500
S100X225TAJ-A				2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/ 8 – 4 AWG			

Tedlar® is a registered trademark of E. I du Pont de Nemours and Company.

Self-Laminating Polyolefin Labels



- Include a colored print-on area and clear over-laminate to protect the legend for clear and durable identification
- Labels are sized specifically for wire and cable applications
- Labels are Halogen-free
- Temperature range: -40°F to 176°F (-40°C to 80°C)
- UL Recognized: UL969, File # MH 14979


Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire/Cable Size Range	Labels Per Row	Labels Per Sheet	Labels Per Pkg.	
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm					
Laser Only																
S100X125FAL	White	1.00	25.4	1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/ 12 – 10 AWG	8	56	2500	
S100X150FAL				1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG				48
S100X160FAL				1.60	40.6	0.80	20.3	0.25	6.4	0.25	6.4	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG				
S100X220FAL				2.20	55.9	1.10	27.9	0.35	8.9	0.35	8.9	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/ 8 – 4 AWG	32	1000		
S100X225FAL				2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/ 8 – 4 AWG			16	
S100X400FAL				4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	8	500		
S200X225FAL		2.00	50.8	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/ 8 – 4 AWG			4	8
S200X400FAL				4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG				

Inkjet Only

S100X125FAI	White	1.00	25.4	1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/ 12 – 10 AWG	8	56	2500	
S100X150FAI				1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG				48
S100X160FAI				1.60	40.6	0.80	20.3	0.25	6.4	0.25	6.4	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG				
S100X220FAI				2.20	55.9	1.10	27.9	0.35	8.9	0.35	8.9	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/ 8 – 4 AWG	32	1000		
S100X225FAI				2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/ 8 – 4 AWG			16	
S100X400FAI				4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	8	500		
S200X225FAI		2.00	50.8	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/ 8 – 4 AWG			4	8
S200X400FAI				4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG				

LabelCore™ Fiber Optic Cable Identification System

PATENTED




- Provides a larger labeling surface on small fiber cables and allows legends to be clearly seen
- Sleeve is made of flexible PVC material
- Locate sleeve on straight section of cable at least 2 inches from fiber boot

Part Number	Color	Part Description	Std. Pkg. Qty.
NWSLC-2Y	Yellow	Yellow cable identification sleeve for 2mm simplex fiber cable, 1 inch long, 100 per pack, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VATY (Thermal Transfer Printer).	100
NWSLC-2Y-AQ	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 1 inch long, 100 per pack, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	
NWSLC-3Y	Orange	Orange cable identification sleeve for 3mm simplex cable, 1 inch long, 100 per pack, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	
NWSLC-7Y	White	White cable identification sleeve for 3mm duplex fiber cable, 1 inch long, 100 per pack, use with labels: S100X225YAJ (Laser/Inkjet); S100X225VAC (LS8E Hand-held Printer); S100X225VATY or S200X225VATY (Thermal Transfer Printer).	
NWSLC2-2Y	Yellow	Yellow cable identification sleeve for 2mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-2Y-AQ	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-3Y	Orange	Orange cable identification sleeve for 3mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-7Y	White	White cable identification sleeve for 3mm duplex fiber cable, 2 inches long, 100 per pack, use with labels: S200X225YAJ (Laser/Inkjet) S200X225VATY (Thermal Transfer Printer).	

Order number of sleeves by Standard Package Quantity.

Non-Laminated Polyolefin Labels

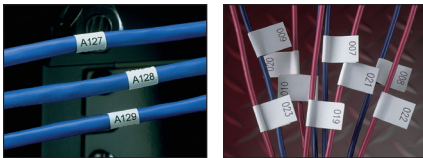


- Use as wrap-around label or flag-style marker for wire/cable labeling
- Conformable material for general identification
- Temperature range: -40°F to 180°F (-40°C to 82°C)

Part Number	Color	Width		Length		Min. Cable O.D.		Max. Cable O.D.		Wire/Cable Size Range	Labels Per Row	Labels Per Sheet	Labels Per Pkg.	
		In.	mm	In.	mm	In.	mm	In.	mm					
N025X075FJJ	White	0.25	6.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	25	275	10000	
N025X125FJJ				1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG		175		
N025X150FJJ				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG	67	150		
N050X075FJJ		0.50	12.7	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	14	154		
N050X125FJJ				1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG		98		
N050X150FJJ				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		84		
N100X075FJJ		1.00	25.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	7	77		5000
N100X125FJJ				1.25	31.8	0.20	4.1	0.32	8.1	10 – 6 AWG		49		
N100X150FJJ				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		42		

Order number of labels required in multiples of Standard Package Quantity.

Polyester Component Labels



- Used to identify patch panels, faceplates, punch-down blocks, and other network systems hardware
- Used to identify electrical and electronic components and devices
- Temperature range: -40°F to 311°F (-40°C to 154°C)
- UL recognized, UL969, File# MH14979
- cUL recognized, C22.2 No. 0.15-01, File# MH14979

Part Number	Color	Width		Height		Labels Per Row	Labels Per Sheet	Labels Per Pkg.	
		In.	mm	In.	mm				
C038X038YJJ	White	0.38	9.7	0.38	9.7	16	352	10000	
C038X038YLJ	Yellow			C050X044YJJ	0.44				11.2
C060X020YJJ	White	0.60	15.2	0.20	5.1	11	385		
C075X025YJJ	White	0.75	19.1	0.25	6.4	9	270		
C075X025YLJ				Yellow	0.50		12.7		153
C075X050YJJ	White	0.80	20.3	0.20	5.1	8	280		
C080X020YJJ				C100X025YJJ	0.25		6.4		210
C100X038YJJ	White	1.00	25.4	0.38	9.7	7	140		5000
C100X050YJJ				C100X050YLJ	0.50		12.7		119
C100X075YJJ	White	1.50	38.1	0.75	19.1	5	84		5000
C100X150YJJ				C150X050YJJ	1.50		38.1	0.50	12.7
C150X050YLJ	Yellow	C150X075YJJ	0.75	19.1	60				
C150X075YJJ	White	1.60	40.6	0.20	5.1	4	140	5000	
C160X020YJJ				C200X050YJJ	0.50		12.7	64	
C200X100YJJ	White	2.00	50.8	1.00	25.4	6	28	1000	
C200X100YLJ				Yellow	C200X125YJJ		1.25		31.8
C200X125YJJ	C300X038YJJ	0.38	9.7	40					
C275X125YJJ	White	3.00	76.2	1.00	25.4	2	18	500	
C300X100YJJ				C300X200YJJ	2.00		50.8		8
C300X200YJJ	White	3.50	88.9	1.00	25.4	1	20	1000	
C350X100YJJ				C400X100YJJ	2.00		50.8		10
C400X100YLJ	White	4.00	101.6	4.00	101.6	4			
C400X200YJJ				C400X400YJJ	7.88	200.2	0.50	12.7	16
C788X050YJJ	White	8.50	215.9	11.00	279.4	1	1	25	
C850X1100YJJ				C850X1100YLJ	Yellow				

Order number of labels required in multiples of Standard Package Quantity.

Silver Polyester Component Labels – FOR LASER PRINTERS ONLY

- Used to identify patch panels, faceplates, punch-down blocks, and other network systems hardware
- Used to identify electrical and electronic components and devices
- Temperature range: -65°F to 275°F (-54°C to 135°C)
- UL recognized, UL969, File# MH14979
- cUL recognized, C22.2 No. 0.15-01, File# MH14979

Part Number	Color	Width		Height		Labels Per Row	Labels Per Sheet	Labels Per Pkg.
		In.	mm	In.	mm			
C075X025YML	Silver	0.75	19.1	0.25	6.4	9	270	10000
C100X050YML		1.00	25.4	0.50	12.7	7	119	
C150X050YML		1.50	38.1	0.50	12.7	5	85	
C200X100YML		2.00	50.8	1.00	25.4	4	28	1000
C275X125YML		2.75	69.9	1.25	31.8	6	18	
C850X1100YML		8.50	215.9	11.00	279.4	1	1	

Order number of labels required in multiples of Standard Package Quantity.

Tamper-Evident Polyester Component Labels – FOR LASER PRINTERS ONLY



- Allow you to see if there has been label tampering
- Leave checkerboard of silver material when label is removed
- Temperature range: -40°F to 302°F (-40°C to 150°C)

Part Number	Color	Width		Height		Labels Per Row	Labels Per Sheet	Labels Per Pkg.
		In.	mm	In.	mm			
C075X025AAL	Silver	0.75	19.1	0.25	6.4	9	270	10000
C100X050AAL		1.00	25.4	0.50	12.7	7	119	
C200X100AAL		2.00	50.8	1.00	25.4	6	28	1000
C275X125AAL		2.75	69.9	1.25	31.8	6	18	

Order number of labels required in multiples of Standard Package Quantity.

Tedlar® Component Labels



- Self-extinguishing and ideal for labeling high-temperature areas
- Temperature range: -40°F to 275°F (-40°C to 135°C)
- UL969 recognized, File # MH 14576, CUL recognized, C22.2 No 0.15-01, File # MH 14676

Part Number	Color	Width		Height		Labels Per Row	Labels Per Sheet	Labels Per Pkg.
		In.	mm	In.	mm			
C050X125TJJ	White	0.5	12.7	1.25	31.8	5	80	1000
C090X025TJJ		0.9	22.9	0.25	6.4	8	224	5000
C100X038TJJ		1	25.4	0.38	9.7	7	140	
C100X150TJJ				1.5	38.1		42	2500
C200X038TJJ		2	50.8	0.38	9.7	3	60	1000
C300X038TJJ		3	76.2			2	40	

Order number of labels required in multiples of Standard Package Quantity.

Tedlar® is a registered trademark of E. I du Pont de Nemours and Company.

Non-Adhesive Polyester Network Labels




- Used to identify patch panels, faceplates, punchdown blocks and other systems hardware
- Temperature range: -10°F to 150°F (-23°C to 65°C)
- Die-cut labels designed to provide maximum aesthetic quality and appearance

Part Number	Color	Width		Height		Application	Labels Per Row	Labels Per Sheet	Labels Per Pkg.
		In.	mm	In.	mm				
C150X030Y1J	White	1.5	38.1	0.3	7.6	3-port identifier	4	112	1000
C195X040Y1J		1.95	49.5	0.4	10.2	Single-gang faceplate	3	60	
C261X035Y1J		2.61	66.3	0.35	8.9	4-port identifier	2	48	
C282X030Y1J		2.82	71.6	0.3	7.6	4-port identifier		52	
C288X040Y1J		2.88	73.2	0.4	10.2	Double-gang faceplate		40	
C390X030Y1J		3.9	99.1	0.3	7.6	6-port identifier		48	
C750X050Y1J		7.5	190.5	0.5	12.7	110 block	1	16	500
C788X050Y1J		7.88	200.2			GP6™ Punchdown System			

Order number of labels required in multiples of Standard Package Quantity.

Polyolefin Network Labels



- Used to identify patch panels, faceplates, punchdown blocks, and other systems hardware
- Temperature range: -40°F to 180°F (-40°C to 82°C)
- Used to identify electrical and electronic components and devices

Part Number	Color	Width		Height		Type of Application	Labels Per Row	Labels Per Sheet	Labels Per Pkg.	
		In.	mm	In.	mm					
C061X030FJJ	White	0.61	15.5	0.30	7.6	1-port identifier	13	325	5000	
C100X038FJJ		1.00	25.4	0.38	9.7	General Identifier	7	140		
C125X030FJJ		1.25	31.8	0.30	7.6	2-port identifier	6	150	2500	
C138X019FJJ		1.38	35.1	0.19	4.8	Module identifier	5	170		
C150X075FJJ		1.50	38.1	0.75	19.1	General Identifier		60		
C188X030FJJ		1.88	47.8	0.30	7.6	3-port identifier	4	100	1000	
C200X100FJJ		2.00	50.8	1.00	25.4	General Identifier		36		
C225X450FJJ		2.25	57.2	4.50	114.3		6	150		
C252X030FJJ		TIA Blue	2.52	64.0	0.30	7.6	4-port identifier	3	75	1000
C252X030FTJ										
C261X030FJJ	White	2.61	66.3	0.30	7.6	5-port identifier	2	50	100	
C315X030FJJ		3.15	80.0					4		
C350X500FJJ		3.50	88.9	5.00	127.0	General identifier	2	4	100	
C379X030FJJ		3.79	96.3	0.30	7.6	6-port identifier	1	50	1000	
C500X700FJJ		5.00	127.0	7.00	177.8	General identifier		2	50	
C700X250FJJ		7.00	177.8	2.50	63.5		4	100		
C788X050FJJ		7.88	200.2	0.50	12.7	GP6™ Punuchdown System	1	25	420	

Order number of labels required in multiples of Standard Package Quantity.

Polyester Safety Labels



- Specially designed polyester media withstands moisture and provides chemical and tough abrasion resistance for outstanding durability in demanding industrial environments
- Excellent durability rating when recommended inks* are used for extended life in harsh environments
- Super-tack permanent adhesive for inkjet and laser media; strong adhesion eliminates curling and maintains fixed mounting over the life of the sign
- Create custom sign legends with Easy-Mark Plus™ Labeling Software
- Temperature range: -65°F to 225°F (-54°C to 107°C)

Part Number	Printer Type	Description	Width		Height		Signs Per Sheet	Std. Pkg. Qty.
			In.	mm	In.	mm		
SEZ0204I	Inkjet	Polyester inkjet permanent adhesive	2.40	60.9	4.00	101.6	8	25
SEZ0405I			4.00	101.6	4.90	124.5	4	
SEZ0508I			4.90	124.5	8.00	203.2	2	
SEZ0810I			7.75	196.9	10.25	260.4	1	
SEZ0811I			8.50	215.9	11.00	279.4		
SEZ0204RI		Polyester inkjet removable adhesive	2.40	60.9	4.00	101.6	8	25
SEZ0304RI			4.50	114.3	3.00	76.2	4	
SEZ0405RI			4.00	101.6	4.90	124.5		
SEZ0508RI			4.90	124.5	8.00	203.2	1	
SEZ0810RI			7.75	196.9	10.25	260.4		
SEZ0811RI	8.50	215.9	11.00	279.4				
SEZ0204L	Laser	Polyester laser permanent adhesive	2.40	60.9	4.00	101.6	8	25
SEZ0405L			4.00	101.6	4.90	124.5	4	
SEZ0508L			4.90	124.5	8.00	203.2	2	
SEZ0810L			7.75	196.9	10.25	260.4	1	
SEZ0811L			8.50	215.9	11.00	279.4		

* Recommended inks include Epson DURABrite Inks

Rigid Sign for Use with Polyester Safety Labels

Part Number	Description	Width		Height		Std. Pkg. Qty.
		In.	mm	In.	mm	
SEZ-RSB1	Non-adhesive polyethylene blank rigid sign for use with SEZ0508I or SEZ0508L	5.00	127.0	8.00	203.2	5
SEZ-RSB2	Non-adhesive polyethylene blank rigid sign for use with SEZ0810I or SEZ0810L	8.00	203.2	10.00	254.0	

Rigid Safety Tags



- Create your own rigid indoor tags with protected legends in minutes using a laser or inkjet printer
- Innovative tag design of the SEZ0305T2L allows for fast, single pass, printing through your laser printer that includes an integrated clear laminate to protect the printed information
- Create custom tags using SEZ0304RI, peel off, and insert into the self-laminating carrier - the PST Tag Carrier allows tags to be resistant to chemicals and acids
- Create custom tag legends with Easy-Mark Plus™ Labeling Software
- Temperature range for SEZ0305T2L: -51°F to 275°F (-46°C to 135°C)
- Temperature range for SEZ0304RI: -65°F to 225°F (-54°C to 107°C)
- Temperature range for PST-2, 4 & 5: -50°F to 200°F (-46°C to 93°C)

Part Number	Description	Width		Height		Signs Per Sheet
		In.	mm	In.	mm	
SEZ0305T2L	Self-laminating tag for Laser printer, two-sided tag, 8.50" x 14.00" sheet, one tag per sheet	3.00	76.2	5.75	146.1	25
SEZ0304RI	Polyester inkjet removable adhesive printable media for use with tag carriers, four tags per sheet			4.75	120.7	
PST-2	Self-laminating tag carriers for use with SEZ0304RI, Front only lamination	3.25	82.6	5.75	146.1	5
PST-4	Self-laminating tag carriers for use with SEZ0304RI, Front only lamination	3.50	88.9			
PST-5	Self-laminating tag carriers for use with SEZ0304RI, Front and back lamination					

Polyester Adhesive Safety Signs

- Signs can be printed with a standard laser printer
- 8.5" x 11" Polyester signs are halogen free
- Temperature range: -40°F to 311°F (-40°C to 154°C)
- Create custom sign legends with Easy-Mark Plus™ Labeling Software



Part Number	Color	Width		Height		Legend	Signs Per Pkg.
		In.	mm	In.	mm		
SEZ-1CLL	Black / Yellow	8.50	215.9	11.00	279.4	CAUTION	25
SEZ-1DLL	Red, White / Black					DANGER	
SEZ-1NLL	Blue / White					NOTICE	
SEZ-1WLL	Black / Orange					WARNING	
SEZ-1WHLL	White					BLANK	
SEZ-1YLL	Yellow					BLANK	

PATENTED

Easy-Mark Plus™ Labeling Software

- Quickly create complex labels or design detailed labels with multiple zones and objects
- Advanced features such as “drag and drop” functionality and wizard tools
- Labels appear on-screen as they will when printed, eliminating guesswork
- Multiple versions available for greater flexibility
- Use with all existing Panduit Easy-Mark™ and Pan-Mark™ files designed in the past, or update them with new objects and styling

System Requirements:

- 300 MB hard drive space and 2 GB Memory
- 32 or 64-bit operating systems
- Windows XP, Vista, 7, 8, 8.1, or 10
- Microsoft.NET Framework 4.0 or higher
- Mouse or compatible pointing device
- Keyboard
- Optical Disc Drive or USB Port



Part Number	Description	Std Pkg Qty.	Std Pkg Qty.
EMPLUS-CD	Easy-Mark Plus™ Labeling Software, CD-ROM	1	10
EMPLUS-DL	Easy-Mark Plus™ Labeling Software, online download		
EMPLUS-2GO	Easy-Mark Plus™ Labeling Software, USB Flash Drive		
EMPLUS-SERVER	Easy-Mark Plus™ Labeling Software, networkable server based version		

^Windows is a registered trademark of Microsoft Corp. in the United States and/or other countries.

CAD-Connect™ Labeling Software

- Facilitates quick and easy organization of identifiers from CAD for printing within Easy-Mark Plus™ Labeling Software
- Easily capture and organize CAD data for future use and documentation
- Saves time and reduces errors by utilizing identifiers previously created in CAD files to eliminate manual entry of data into labeling software
- Compatible with full versions of AutoCAD* 2002 to 2017 and Visio versions 2002 or newer
- Exports to alternative formats such as Excel^ (XLS) or Text (CSV) files for future use and documentation

- Upgrades available at www.panduit.com

System Requirements:

- 64 MB hard drive space and 64 MB RAM (256 MB RAM recommended)
- Windows 2000, XP, Vista, 7, 8, 8.1 or 10
- Mouse or compatible pointing device
- Microsoft.NET Framework 2.0 or higher
- CD-ROM Drive



Part Number	Description	Std. Pkg. Qty.	Std. Ctn. Qty.
PROG-CCCD	CAD-Connect™ Labeling Software, including Easy-Mark Plus™ Labeling Software, CD-ROM.	1	10

*AutoCAD is a registered trademark of Autodesk, Inc.

^Visio, Windows, and Excel are registered trademarks of Microsoft Corp. in the United States and/or other countries.

For additional information or questions please call:

Customer Service – 800-777-3300

Technical Support for USA & Canada – 866-871-4571

Latin America – +52-33-3777-6000

Brazil – 5511-3613-2353

Europe – +31-0-546-580-452

Asia Pacific Region – 65-6379-6700

Japan – 81-3-6863-6060

Australia – 61-3-9794-9020



PANDUIT®

Panduit Corp.
World Headquarters
Tinley Park, IL 60487

cs@panduit.com
US and Canada: 800.777.3300
Europe, Middle East, and Africa:
44.20.8601.7200
Latin America: 52.33.3777.6000
Asia Pacific: 65.6305.7575

www.panduit.com