

## RSF80 SERIES

### COMPACT EXTERNAL FITTING BY 1/2"NPT



The RSF80 series are designed for mounting through the wall of a tank, via 1/2"NPT thread without requiring access to the inside of the tank.

Typical applications include diesel generators, hydraulic oil and gearbox oil levels.

They are manufactured in a range of plastics to suit most commonly used liquids.

The switch can be fitted to achieve either make on rise (N/O) or make on fall (N/C) action by simply rotating through 180°.

Available with either flying leads or M12 circular connector socket. Cables are available for use with M12 connector versions.

#### Features

- 1/2"NPT external mount
- Available in Nylon, Polypropylene, PPS or PVDF
- WRAS and NSF Approved versions
- Many variants are UL recognised components File No. E171218
- Flying lead or M12 connection

## SPECIFICATIONS

### Technical

	RSF83	RSF84	RSF88	RSF86	RSF87
<b>Material</b>	Nylon	Polypropylene WRAS approved	Polypropylene UL approved	Polyphenylene Sulphide (PPS)	Polyvinylidene Fluoride (PVDF)
<b>Colour</b>	Black	Opaque	White	Grey	Green
<b>Temp. Range</b>	°C °F	-20/+75	-20/+100	-10/+120*	-10/+105
		-4/+167	-4/+212	-4/+212	+14/+248*
<b>Min. Fluid SG</b>	0.85	0.85	0.80	0.85	0.85
<b>Must Close Level (SG=1)</b>	7mm	8mm	8mm	9mm	9mm
<b>Must Open Level (SG=1)</b>	20mm	20mm	20mm	24mm	24mm

\* Maximum temperature requires ETFE cable to be specified.

## Electrical

		<b>25W (Y code)</b>	<b>100W (H code)</b>
<b>Contact Form</b>		N/O (N/C)	N/O (N/C)
<b>Switching Power Max</b>	VA	25	100
<b>Switching Voltage AC Max</b>	V	240	300
<b>Switching Voltage DC Max</b>	V	120	300
<b>Switching Current Max</b>	A	0.6	1

All ratings are for resistive load only.



## STANDARD PARTS


	<b>Material</b>	<b>Max Power</b>	<b>Leadouts</b>	<b>Approvals</b>
<b>RSF83H100R</b>	Nylon	100VA	100cm PVC 16/0.2	WRAS
<b>RSF83Y100R</b>	Nylon	25VA	100cm PVC 16/0.2	WRAS
<b>RSF84H100R</b>	Polypropylene	100VA	100cm PVC 16/0.2	WRAS & NSF
<b>RSF84Y100R</b>	Polypropylene	25VA	100cm PVC 16/0.2	WRAS & NSF
<b>RSF86H050T</b>	PPS	100VA	50cm ETFE 19/0.2	WRAS, UL & NSF
<b>RSF86H100R</b>	PPS	100VA	100cm PVC 16/0.2	WRAS, UL & NSF
<b>RSF86Y050T</b>	PPS	25VA	50cm ETFE 19/0.2	WRAS, UL & NSF
<b>RSF86Y100R</b>	PPS	25VA	100cm PVC 16/0.2	WRAS, UL & NSF
<b>RSF87H100G</b>	PVDF	100VA	100cm PTFE 7/0.2	UL & NSF
<b>RSF87Y100G</b>	PVDF	25VA	100cm PTFE 7/0.2	UL & NSF
<b>RSF88H100R</b>	Polypropylene UL	100VA	100cm PVC 16/0.2	UL
<b>RSF88Y100R</b>	Polypropylene UL	25VA	100cm PVC 16/0.2	UL
<b>RSF83HP</b>	Nylon	100VA	M12 connection	WRAS
<b>RSF83YP</b>	Nylon	25VA	M12 connection	WRAS
<b>RSF84HP</b>	Polypropylene	100VA	M12 connection	WRAS & NSF
<b>RSF84YP</b>	Polypropylene	25VA	M12 connection	WRAS & NSF
<b>RSF86HP</b>	PPS	100VA	M12 connection	WRAS, UL & NSF
<b>RSF86YP</b>	PPS	25VA	M12 connection	WRAS, UL & NSF
<b>RSF87HP</b>	PVDF	100VA	M12 connection	UL & NSF
<b>RSF87YP</b>	PVDF	25VA	M12 connection	UL & NSF
<b>RSF88HP</b>	Polypropylene UL	100VA	M12 connection	UL
<b>RSF88YP</b>	Polypropylene UL	25VA	M12 connection	UL

Custom versions can be made for particular applications. Please contact Sensata with your requirements.




## DIMENSIONS

All dimensions are in millimeters.

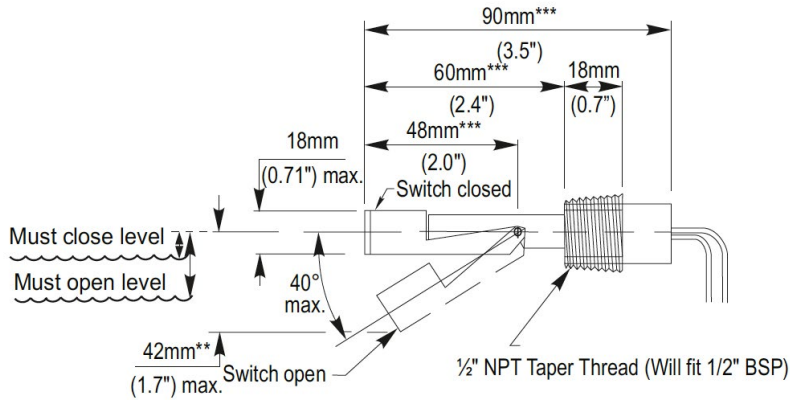

\*\* 49mm RSF86 & RSF87

\*\*\* Add 10mm to dims, RSF86 & RSF87



Made in the UK

Page 3

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

## CONTACT US

+44 (0)1202 897969  
c3w\_sales@sensata.com  
Cynergy3 Components Ltd.  
7 Cobham Road,  
Ferndown Industrial Estate,  
Wimborne, Dorset,  
BH21 7PE, United Kingdom