




Dimensions : mm / [inches]

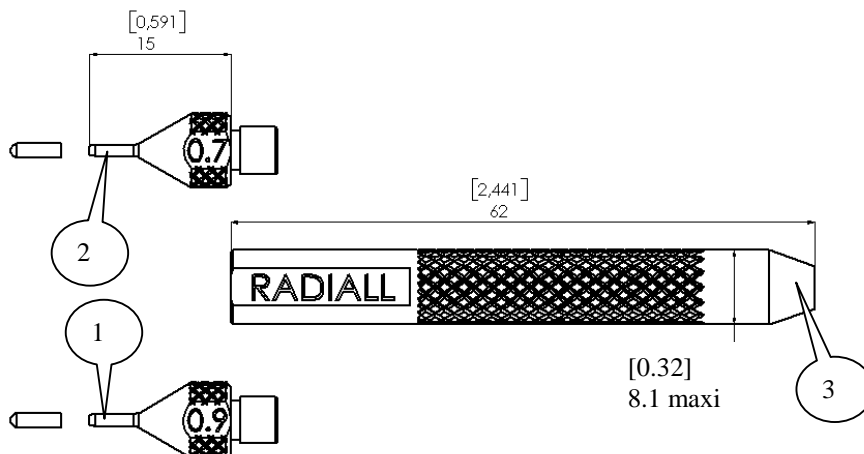

**GENERAL**

- Compatible with LC, SC and FC connectors.
- Suitable for use with cable sizes Ø 1.5 mm to 3.2 mm.
- Stainless steel.


**CHARACTERISTICS**

**FUNCTIONING**


1. For 0.9 mm buffer coating: screw the part number 1 on the part number 3  
and  
For 0.6 or 0.7 mm buffer coating: screw the part number 2 on the part number 3.




2. Insert the part number 1 or 2 under the outer cable and under the reinforcing elements in aramid yarns.

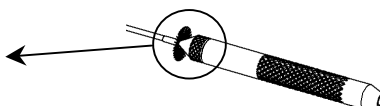

3. Insert the inner sleeve inside the part number 3.

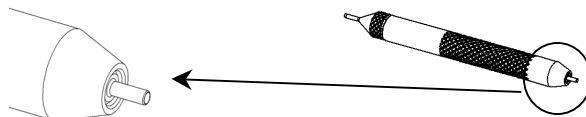

4. Insert, by growing with the tool, the inner sleeve under the outer cable and under the reinforcing elements in aramid yarns.

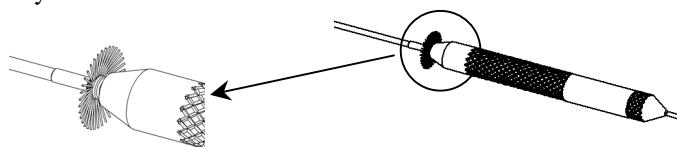

CREATION					<b>RADIALL®</b>
N°:					101, rue P. Hoffmann
EPF : 0001-1					93116 ROSNY/BOIS
Name : P.B.					FRANCE
Date : 06 19 02					Tel : (33) 0149353535
Appr : S.D.	Issue	Revisions	Name	Appr.	Fax : (33) 0148546363