


PELTOR™



Tactical Communications and Hearing Protection

- Hearing Protection • Tactical Radio Communications
- Environmental Listening • Face-to-Face Communications
- Hearing Conservation



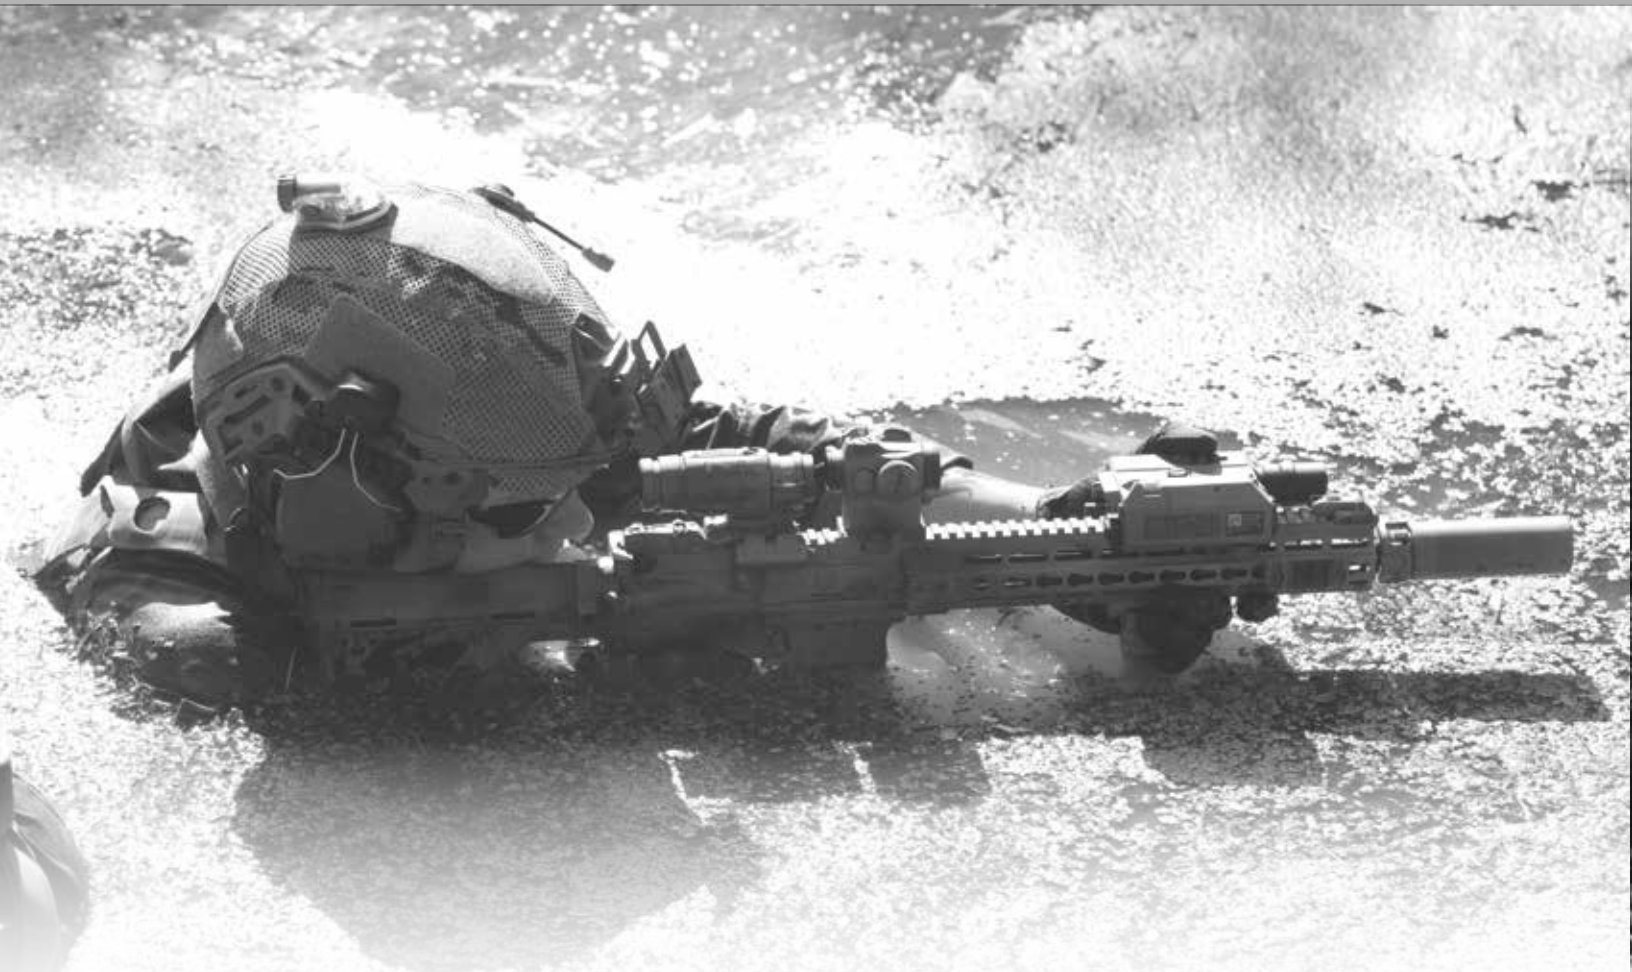

PELTOR™

We strive to set the standard for confidence and trust by providing rugged, reliable protective communication equipment. Today, our Tactical Communication and Hearing Protection solutions are widely used within the Department of Defense, Department of Justice, Department of Homeland Security, and across U.S. state and local agencies.

3M PELTOR™ solutions for today's modern warfighter have been designed for use in combat and combat support operations, specifically for use with firearms and ballistic combat helmets. The hearing protectors feature external microphones for environmental listening (aka: "Talk-Through") capability, so operators can maintain auditory situational awareness while still protecting their hearing.

You protect us. And we thank you by committing to continue to supply protective equipment.

Solutions for Conventional Forces



- Protection from Hazardous Steady-State and Impulse Noise
- Clear, Intelligible Two-Way Audio Communications via Radios and Intercoms
- Environmental Listening for Auditory Situational Awareness
 - “Talk-Through” for Face-to-Face Verbal Conversation

Tactical Communication and Protection System (TCAPS) Devices

3M provides TCAPS devices for today's modern warfighter designed specifically for use with firearms and ballistic combat helmets. The hearing protectors feature external microphones for environmental listening, commonly referred to as "talk-through", so our service members can maintain auditory situational awareness while still protecting their hearing. In the "Hearing Defender" Configuration, there is no connection to two-way radios or intercoms, which can provide significant cost savings and removes unneeded cables where radio communications connection is not required.



**PELTOR™ Tactical Ear Plug
TCAPS Hearing Defender Configuration**
TEP-100



**PELTOR™ COMTAC III
TCAPS Hearing Defender Configuration**
MT17H682FB-09 CY
MT17H682BB-09 CY



Hearing Protection

3M™ PELTOR™ COMTAC Tactical Communication Headset and 3M™ PELTOR™ Tactical Earplug TEP-100 meet the single hearing protection requirement listed in DA PAM 40-501 Army Hearing Conservation Program 2015 for both steady-state and impulse noise. The hearing protectors are tested in accordance to ANSI S3.19-1974 for Steady-State Noise Attenuation and ANSI S12.42-2010 – for impulse noise protection.

Compression vs. Clipping

3M uses compression technology instead of peak clipping to handle hazardous noise that strikes the environmental microphones. Peak clipping can result in parts of a speech signal being cut off. Compression technology resolves that issue and can dramatically improve speech intelligibility.

Addressing the Hearing Impaired

While hearing aids offer significant assistance to service members with hearing loss, hearing aids cannot be worn in hazardous noise environments. TCAPS products, **although not medical devices**, do offer some amplification while helping protect hearing in noisy environments.

Environmental Listening – aka: “Talk-Through”

Environmental Listening is a means of allowing safe audio sounds to bypass the individual hearing protection while still protecting against harmful noises. This is accomplished with a proprietary digital audio circuit integrated into the headset.

A microphone receives the sounds outside the headset and transmits them to a speaker inside the headset. The Level-Dependent digital audio circuit senses noise levels above the desired threshold and compresses them to a safe decibel level or amplifies weak sounds to an audible level.



3M™ PELTOR™ TEP-100 Earplug

Level-dependent hearing protection for improved auditory situational awareness.

Rechargeable:

Charging contacts recharge the unit while in the case. Li-ion battery provides up to 16 hours of continuous operation.

Button:

Intuitive one-button operation turns unit on, off, and selects volume settings (2).

Microphone Cover:

Helps minimize wind noise.

Waterproof (IP67):

Innovative design protects microphone against water ingress.

Design:

Corner radius designed to help soften contact zone and increase comfort.

Cord Connection:

Attachment point for optional earpiece retention cord. (included)

Hearing Protection:

Replaceable communications eartip helps provide hearing protection in noisy environments. Multiple sizes and types designed to fit most ear canals.

Portable Charging Compartment:

Up to 16 charges from 3 AA alkaline batteries.

Retention Cord Storage Posts:

Provides convenient and tangle-free storage for earplug retention cord.

Sealing Ring:

Rubber sealing ring helps protect earplugs in wet and dirty environments. (IP67)

Earplug Clips:

Steel clips secure earplugs in case – helps ensure contact for charging.

Micro B USB Charging Port:

USB port for charging earpieces. (cord not included)



3M™ PELTOR™ COMTAC III Tactical Communication Headset

PELTOR COMTAC III Salient Features

- Environmental Listening
- Steady-State and Impulse Noise Protection
- Two-Way Radio or ICS Communications

Configurations

- COMMS: Single and Dual COMM
- Suspension: Headband, Back Band and Rail Attachment
- Color: OD Green, Coyote Brown, Foliage Green, Black
- Ear Cushion: Standard or Gel

Ambidextrous Boom Mic

- Noise-canceling boom mic (that can be mounted on either left or right side by operator)
- Boom angled to minimize interference with helmet and peripheral vision

Batteries & Fail Safe

- 2 AAA Batteries that provide +400 hours of battery life
- External communications and “talk-through” are battery independent for Rx/Tx fail safe. In the unlikely event of electronic failure or battery depletion, external communications will continue to function

Environmental

- MIL-STD-810F, Department of Defense Test Method Standard for Environmental Engineering Considerations and Laboratory Tests
- Submersion: 3 feet, 30 minutes, salt water survivable

EMI

- MIL STD 461E, Department of Defense Interface Standard, Requirements for the Control of Electromagnetic Interference Characteristics of Subsystems and Equipment
 - CS114, RE101, RE-102-4, RS101, and RS103 requirements

Noise Reduction Ratings (NRR)

- ANSI S3.19-1974
 - COMTAC 3 (Headband version, standard foam cushion): NRR (23) dB
 - COMTAC 3 (Back Band version, standard foam ear cushion): NRR (22)dB

Impulse Noise Protection

- Tested at 168dB in accordance to ANSI S12.42-2010



COMTAC III Back Band – Single COMM
– MT17H682BB-47 FG



FL5601-02



HY80A Gel Ear

3M™ PELTOR™ Push-To-Talk Adapters

Push-To-Talk Adapter/Tactical Radio Adapter – AN/PRC-148/152

- MIL-C-55116 6-Pin Connector
- PTT's are designed to fit the size and shape of either hand
- PTT's can be used with a gloved hand
- Designed to reduce accidental activation
- U-174 Headset Connection serves as a break-away connector for removal in emergency situations



FL5601-02

Push-To-Talk Adapter/Vehicle Intercom Adapter – AN/PRC-VIC-3

- The 3M Ground Vehicle Military PTT Headset comes off-the-shelf with a Large Center PTT and an A/B Toggle for Radio/ICS Switching with AP-107 Break Away Vehicle Adapter Connector
- This configuration provides an additional capability for ground vehicle users over the older 3 Position Toggle Position by allowing to Rx/Tx over the long range radio or over the intercom without having to switch out of ICS
- When Toggled to ICS the operator speaks Hot Mic/Vox over the ICS, when the PTT is pressed, the ICS Tx is switched to Tx over the radio



FL5601-09

Multi-Channel Radio Push-To-Talk Adapter – AN/PRC-154 Rifleman and MBTR 2

- Designed specifically to support next generation Multi-Channel Radios
- Able to support up to 4 channels
- Shielded and tested to eliminate cross-talk
- Reversible grip design to accommodate left and right handed operators

Product available through Thales Communications

Adapter Cables:

- AN/VIC 3 Adapter Cable
- 3.5 mm Jack Audio Cable
- FM50/53 Respirator Audio Cable



FL1512



AN/VIC 3 Adapter Cable











3.5 mm Jack Audio Cable




FM50/53 Respirator Audio Cable

COMTAC III Kit - National Stock Numbers

| P/N Number | Description | NSN |
|---|--|------------------|
| P/N: 88078-00000  | Single COMM – Headband – CY Kit  | 5965-01-572-7829 |
| P/N: 88079-00000  | DUAL COMM – Headband CY Kit  | 5965-01-572-7797 |
| P/N: 88080-00000  | Single COMM – Headband – OD Kit  | 5965-01-572-7941 |
| P/N: 88081-00000  | DUAL COMM – Headband – OD Kit  | 5965-01-572-7946 |
| P/N: 88060-00000  | Single COMM – Back band – TCAPS Kit  | 5965-01-620-1182 |
| P/N: MT31  | Boom Mic Spare  | 5965-01-572-7803 |

Solutions for Special Operation Forces

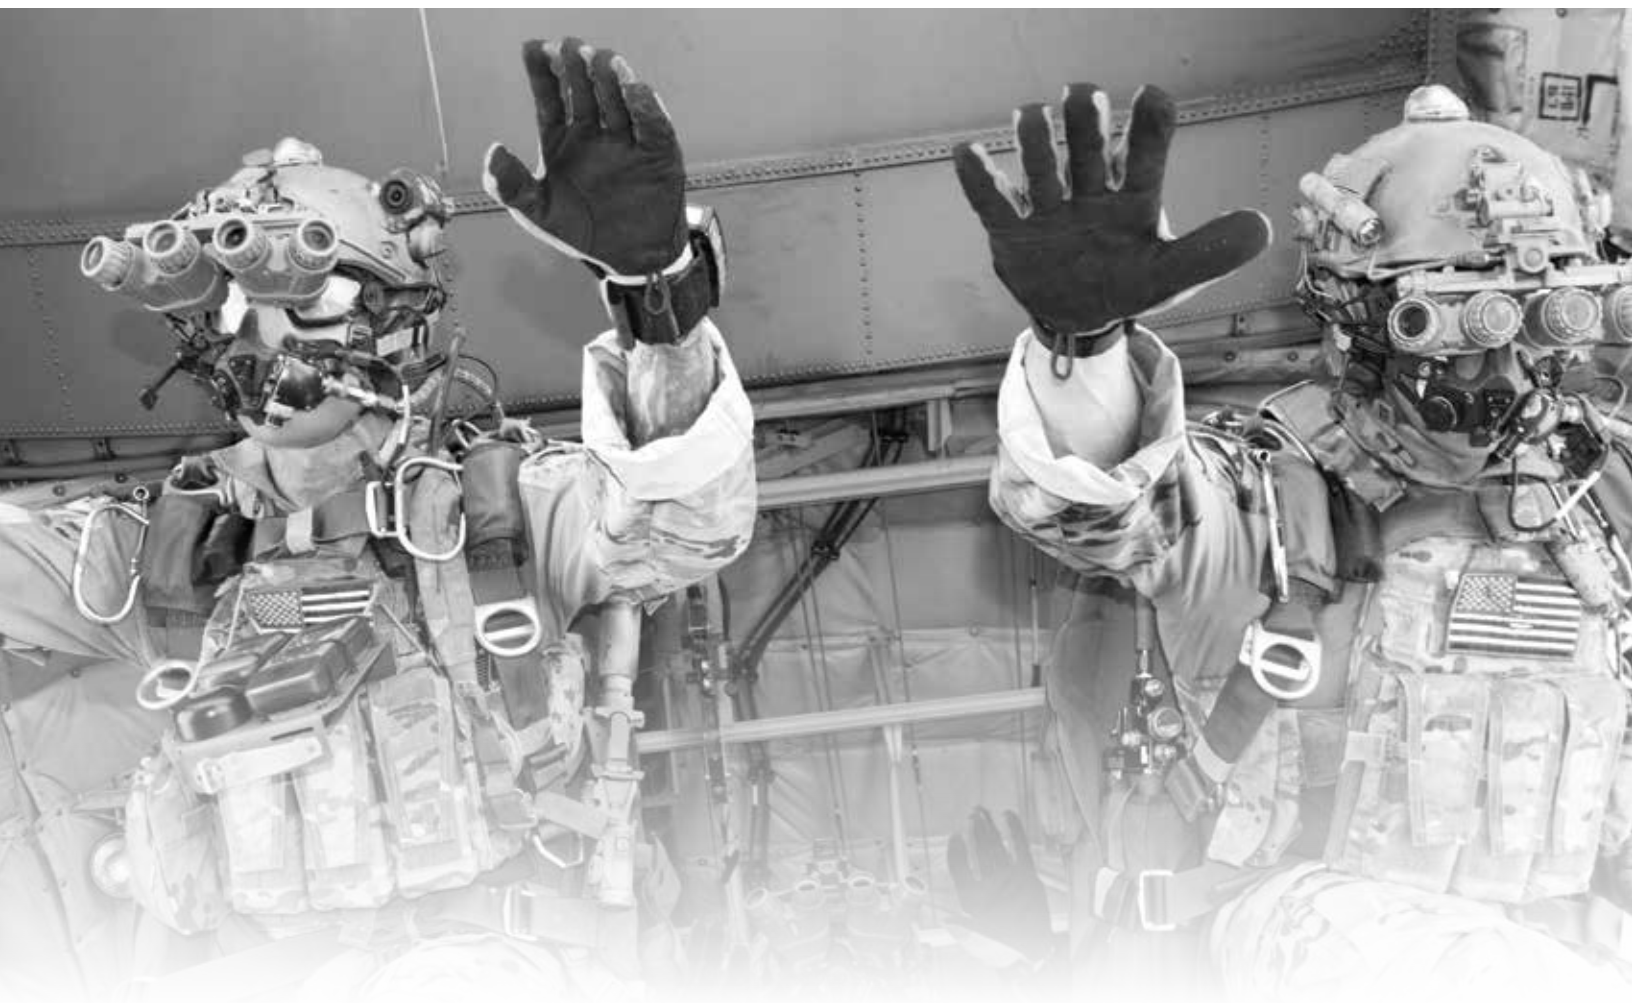

- Integrated Helmet Rail Attachment Option
 - Maritime Variant Option
- Interoperable (“Plug n’ Play”) on Common SOF Aviation and Ground Mobility Platforms
 - Engineered to Prevent Cross-talk in DUAL COMM Configurations

COMTAC III SOF ARC Configuration

Heat Relief

The ability to have an “open” position of the headset allows the user to ventilate in high-heat environments but can still monitor communications in low-noise environments

Removed Pressure Points

Removal of headset band and optional eyewear goggle strap eliminates known pressure points

Stability & Balance

In the “closed” position, the ear cups will compress against the head providing additional stability for full head movement

Easy Donning/Doffing

In the “open” position, the operator can easily don/doff the helmet/headset, and adjust for proper fit

Tested and Approved

Headset and helmet tested as a system by USSOCOM for protection against steady-state and impulse noise



USSOCOM Urban Push-To-Talk

- MIL-C-9177 U94/A PTT
- Switching mechanism to prevent cross-talk
- Molle Clip
- 19" Custom Length
- MIL-C-55116 6-Pin Connector
- PTT's are designed to fit the size and shape of either hand
- PTT's can be used with a gloved hand
- U-174 Headset Connection serves as a break-away connector for removal in emergency situations
- Tested for cross-talk in DUAL COMM Configuration





COMTAC H2O Maritime Configuration

System sold exclusively through Atlantic Signal

- 3M™ PELTOR™ COMTAC-M Headset is a maritime version of its COTS COMTAC platform, designed for combat swimmer needs for Special Operation Forces Maritime missions
- System is designed to meet USSOCOM Maritime requirements
- NEW Maritime Rated Boom MIC
- NEW Environmental Microphones
- NEW In-line, Quick Disconnect wet mate-able Connector
- Interfaces to the Atlantic Signal Maritime Push-to-Talk for connection to Maritime Communication Assets
- Headband, Back Band, and ARC Configurations
- Coyote Brown and OD Green



COMTAC IV Hybrid Communication Headset

Same features and functionality as COMTAC III

- Hybrid approach addresses customer demand for in-ear hearing protection while retaining the advantage of the COMTAC III over-the-ear style
- Headband mechanically stabilizes the headset to relieve issues of earplugs dislodging due to cable snags and body movement
- Electronics are contained completely inside the headset housing, eliminating the need for a large, heavy radio control push-to-talk
- Headsets are backwards compatible with pre-existing PTT adapters
- Same operation as current PELTOR COMTAC Headsets
- No software loads or outside power required



USSOCOM – National Stock Numbers


| P/N Number | Description | NSN |
|---|--|------------------|
| P/N: 88900-00000  | Single COMM – SOF Kit – CY  | 5895-01-598-4532 |
| P/N: 88901-00000  | DUAL COMM – SOF Kit – CY  | 5895-01-598-4531 |
| P/N: 88078-ARC  | Single COMM – SOF ARC Kit – CY* *Helmet Not Included  | 5895-01-624-0377 |
| P/N: 88079-ARC  | DUAL COMM – SOF ARC Kit – CY* *Helmet Not Included  | 5895-01-624-0390 |
| P/N: 88403-00000  | Single COMM – SOF Kit – CY  | 5895-01-624-0382 |
| P/N: 88404-00000  | DUAL COMM – SOF Kit – CY  | 5895-01-624-0387 |



Communications Management

COMTAC III and COMTAC IV both have Single and Dual Comm variants for streamline cable management. The downloads separate left and right audio traffic.

Each COMTAC download terminates in a standard U/174 NATO wired "Quick Disconnect" plug. The U/174 Plug is a standard military aviation plug and will plug directly into most military aviation intercom systems.



FM53 Comms Cable
P/N: 88055-00000



Scanner Cable
P/N: FL6AF-SB002

The PTT adapter terminates in a 6-pin MIL-C-55166, which will interface to the vast majority of Military radios and intercoms (i.e. AN/PRC-148 MBITR, PRC-152 Falcon).



P/N: FL-U/94A



Laptop Connection
P/N: FL6AF-SB001

The 6-pin will connect directly to a VIC-3 Panel and will also connect an extension cable to a VIC-3 Intercom Bail-Out connector.



P/N: FL5601-09



P/N: 88058-00000

Multiple communication management configurations are available; please contact 3M Technical Service at 800-665-2942 for help in customizing your mission.

COMTAC/SWAT-TAC Product Reference Selector

Use the options below to identify which COMTAC headset may be preferred for your application. Multiple communication management configurations are available; please contact 3M Technical Service at 800-665-2942 for help in customizing your mission.

1. OVER-THE-EAR OR IN-EAR?



COMTAC III ACH



COMTAC IV HYBRID

2. BAND STYLE?



HEADBAND STYLE



NECKBAND STYLE*



ARC ATTACHMENT

3. RADIO COMMUNICATION?



NO RADIO CONNECTION



SINGLE COMM



DUAL COMM



DUAL COMM SPLIT AUDIO*

4. COLOR?



OD Green*



Coyote Brown



Covert Black (SWATTAC)*



Foliage Green*

5. IDENTIFY RADIO OR INTERCOM

- AN/PRC-148 MBITR
- AN/PRC-150, 152 Falcon Series
- Motorola Series
- AN/VIC-3
- AN/PRC-117, 119
- AN/PRC-153

Note: For unlisted radios or intercoms, contact 3M Technical Assistance.



* Available for COMTAC II ACH headset only



COMTAC/SWAT-TAC Kit Part Number Selector

Use the categories below to identify which COMTAC headset part # to use for ordering purposes. COMTAC headsets and accessories can be bought separately. If your configuration is not identified here, please call 3M Technical Assistance at 800-665-2942.

Pre-assembled COMTAC kits include: headset, adapter (PTT), bag, batteries and gel ear cushions. Headband kits also include two Oblong ZORBIUM® ACTION PADS (ZAPTM) to accommodate headband headset integration within ground combat helmets.

| COMTAC ACH | COMTAC IV | Single Comm (1 PTT) | Dual Comm (2 PTT's) | Foliage Green | Covert Black | Coyote Brown | OD Green | PRC/153 Motorola® XTS Series | AN/PRC-148, 150, 152, 119, 117 | Part # Prefix (Suffix at bottom of table) |
|------------|-----------|---------------------|---------------------|---------------|--------------|--------------|----------|------------------------------|--------------------------------|---|
| ● | | ● | | ● | | | | | ● | 88060- |
| ● | | | ● | ● | ● | ● | | | ● | 88061- |
| ● | | ● | | | | ● | | ● | | 88063- |
| ● | | ● | | | | ● | | | ● | 88078- |
| ● | | | ● | | | ● | | | ● | 88079- |
| ● | | ● | | | | | ● | | ● | 88080- |
| ● | | | ● | | | | ● | | ● | 88081- |
| | ● | ● | | | | ● | | | ● | 88403- |
| | ● | | ● | | | ● | | | ● | 88404- |

Part # suffix options:

- 00000 headband kit
- B back band kit
- ARC Arc Rail attachment

(valid part # example: 88060-00000)

Product Classifications

Our products commonly meet government procurement requirements in most applications. Contact your 3M Sales Representative or Customer Service Representative to obtain product certifications for the following:

- Buy American Act for Department of Defense
- Trade Agreement Act
- Berry Amendment
- Product classified as ECCN: 5A991.G

▲WARNING

Hearing Protection Products*

Caution: When worn according to the User Instructions, this hearing protector helps reduce exposure to both continuous noises, such as industrial noises and noises from vehicles and aircraft, as well as very loud impulse noises, such as gunfire. It is difficult to predict the required and/or actual hearing protection obtained during exposure to impulse noises. For gunfire, the weapon type, number of rounds fired, proper selection, fit and use of hearing protection, proper care of hearing protection, and other variables will impact performance. If your hearing seems dulled or you hear a ringing or buzzing during or after any noise exposure (including gunfire), or for any other reason you suspect a hearing problem, your hearing may be at risk. To learn more about hearing protection for impulse noise, visit www.3M.com/hearing.

Choking Hazard—Keep away from infants and small children. These hearing protectors help reduce exposure to hazardous noise and other loud sounds. Misuse or failure to wear hearing protectors at all times that you are exposed to noise may result in hearing loss or injury. For proper use, see supervisor, User Instructions, or call 3M PSD Technical Service in the USA at 1-800-243-4630. In Canada, call Technical Service at 1-800-267-4414. If there is any drainage from your ear or you have an ear infection, consult with your physician before wearing earplugs. Failure to do so may result in hearing loss or injury.



Personal Safety Division

3M Center
Building 235-2W-70
St. Paul, MN 55144-1000

For more information:

In U.S.

Technical Assistance 1-800-243-4630
Customer Care Center 1-800-328-1667
3M.com/PPESafety

In Canada

Technical Assistance 1-800-267-4414
Customer Care 1-800-364-3577
3M.ca/PPESafety

ZORBIUM® and ZAP™ are trademarks of Team Wendy.
3M and all other trademarks used herein are trademarks of 3M Company, used under license in Canada.
Please recycle. Printed in U.S.A.
© 3M 2016. All rights reserved.
70-0716-7176-5