



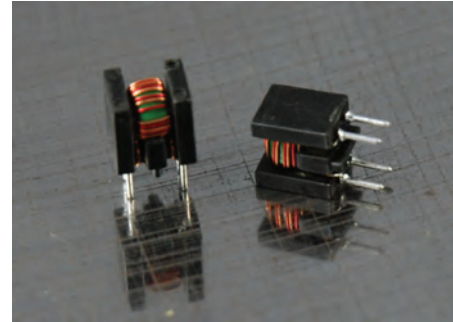

RADIAL LINE FILTER

RLF20

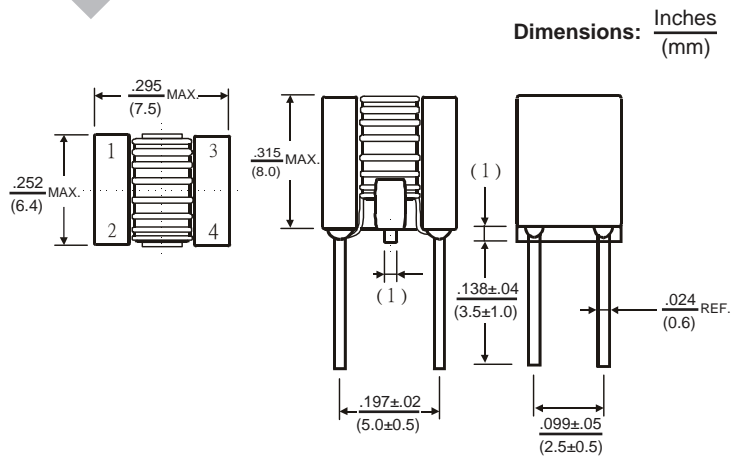

Allied Part Number	Inductance (μh) @ 1 KHz	Tolerance (%)	IDC A Min.	Impedance (Ω) @ 100 MHz	DCR Max (N1=N2)
RLF20-400Y-RC	40	35	.75	1000	20m Ω

Features

- Low Magnetic Radiation
- Low Core Loss
- Small Foot Print

Electrical

Inductance: 40uh both windings

Tolerance: 35%, each winding to within 3uh of each other.

Test Frequency: 1KHz/0.25V

Hi Pot Test: N1-N2: 500VAC/5mA/1S

Operating Temp. Range: -20° to +105°C

Rated Voltage: 50V

Physical

Packaging: 500 pieces per bag.

Marking: None