



SMD Single Port 2.0 USB Receptacle

AUSB1SM-4732

- Single Port 2.0 USB Receptacle
- Type-A
- Operating Temperature Range: -55°C to +85°C




Electrical Specifications @ 25°C

Voltage Current Rating @1.5A	Insulation Resistance (MΩ) Min	Contact Resistance (mΩ) Max	Dielectric Withstanding Voltage at Sea Level
30VDC	1000	30	500VAC

All specifications subject to change without notice.

MECHANICAL

Dimensions: $\frac{\text{inch}}{(\text{mm})}$

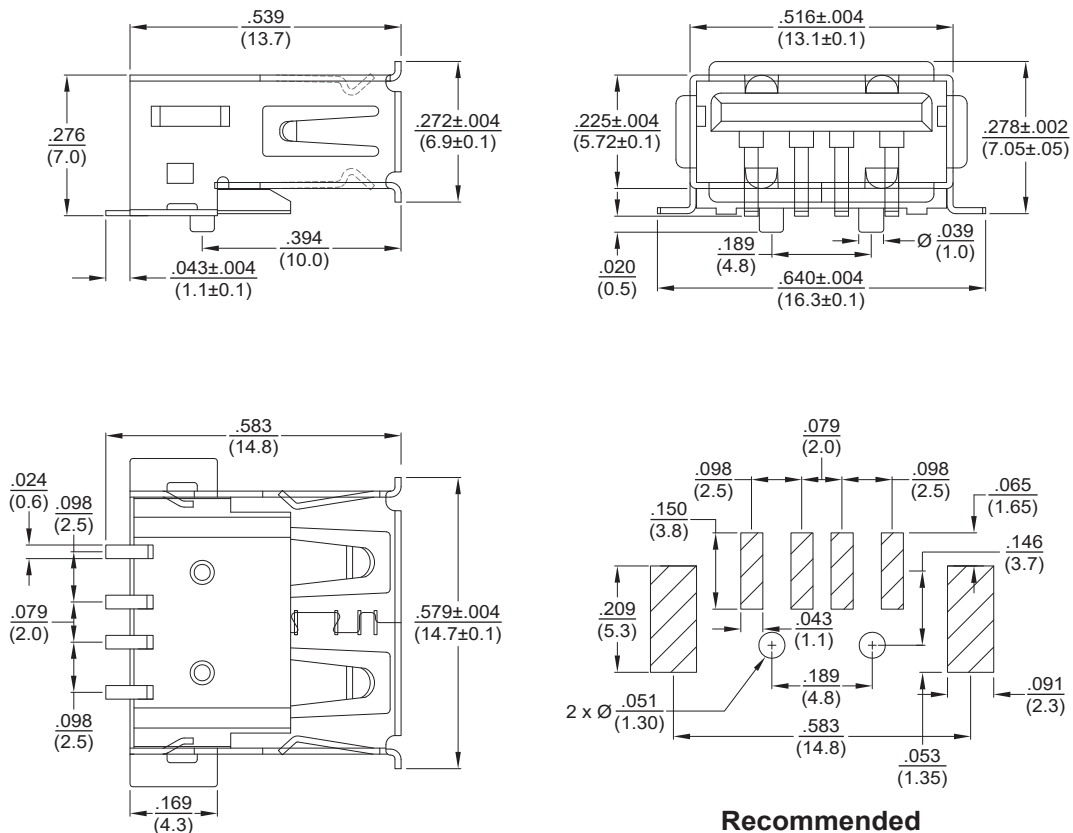

Recommended Land Pattern

NOTES

1. **Housing:** High Temperature Thermoplastic, UL94V-0 LCP Black
2. **Contact:** Copper Alloy C2680
3. **Shell:** Copper Alloy C2680/SPCC
4. **Contact Finish:** Gold Plating in Mating Area, Tin on Pins
5. **Shell Finish:** Nickel Plating