
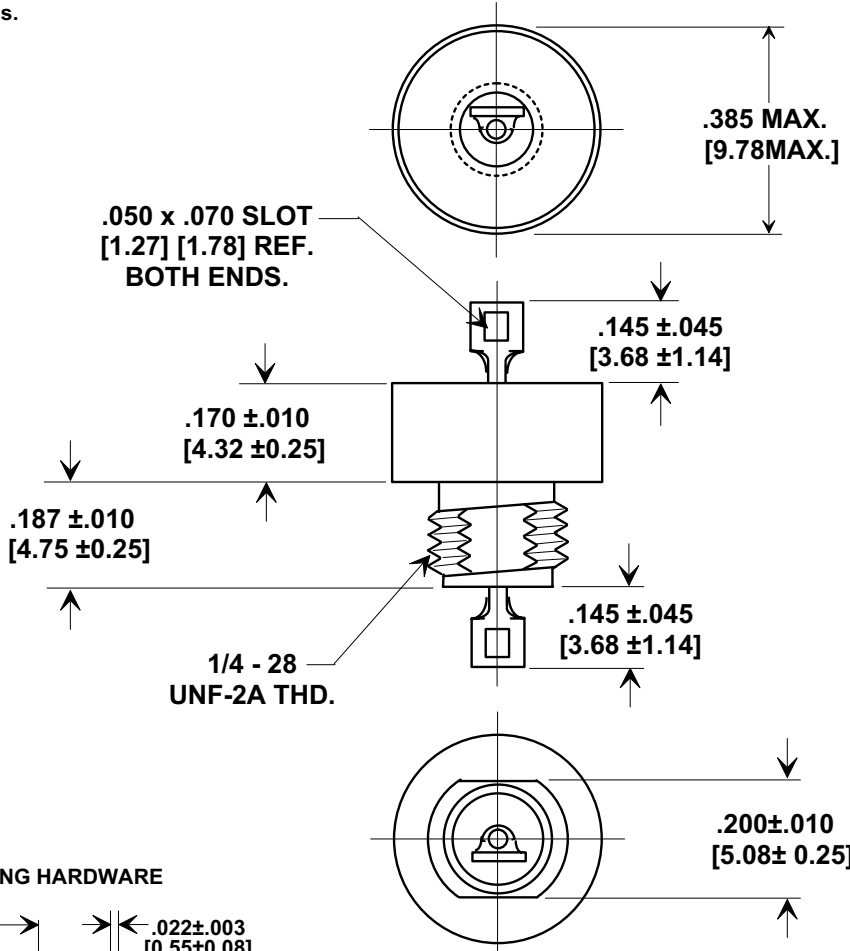




MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



MOUNTING HARDWARE



LOCK WASHER



HEX NUT

NOTES:

MATERIALS:

- BUSHING - TIN PLATED STEEL
- LEAD - SOLDER PLATED COPPER
- NUT - TIN PLATED BRASS
- L'WASHER - TIN PLATED PHOSPHOR BRONZE
- MOUNTING TORQUE: 8 lb - ins. max
- SEAL TESTED PER MIL-STD-202 METHOD 112 CONDITION A.
- VOLTAGE DROP 0.15 VDC MAX.
- MAX. SOLDER TEMPERATURE 500°F

CAPACITANCE	WORKING VOLTAGE DC		CURRENT D.C.	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220						
	85°C	125°C		30 KHz	150 KHz	300 KHz	1 MHz	10 MHz	1 GHz	10 GHz
1.2 - 2.4 µF	100	50	15 A	15	28	33	44	60	70	70

X-2015 Rev-0 REVISION RECORD Original Release C.O. 20010302-1-01	0	--TOLERANCES-- Unless Otherwise Specified	Title MI5733/49-0006		
	HERMETICALLY SEALED BUSHING MOUNT EMI FILTER				
	Drawn		L.E. 03-02-01	Scale	X 3
	Approved		H.R. 03-02-01		
TUSONIX TUCSON, ARIZONA		A	4601-501		