

20 Watt — LD20W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING



DIMMING
LD20W Series
20W

Model: LD20W Series

- Drive Mode: Constant Current or Constant Voltage
- Technology: PFC Off-Line Switch Mode
- Output Power: 20W Max.
- Input Voltage: 90-305VAC, 47- 63Hz
- Number of Outputs: One
- Output Voltages: 4VDC - 57VDC
- Output Currents: 350mA - 1660mA
- Optional 0-10V or PWM Positive Dimming 10% ~ 100%

Environmental

1. Operating temperature: Tc 90C Maximum. Reference -30 to +60°C ambient
2. Storage temperature range: -40 to +85°C
3. Humidity (non-condensing): 5% - 95%RH
4. Cooling: Convection
5. Vibration Frequency: 5-55Hz/2g, 30 minutes
6. Impact resistance: 1g/s
7. MTBF@ 40°C: 488,000 hours @ Full Load per MIL-217F Notice 2.

Safety and Compliance

1. UL8750, EN61347, CSA 22.2 safety compliant
2. FCC, 47CFR Part 15 Class B compliant
3. Water resistant and Dust Proof Design: IP66, NEMA4, for Dry, Damp, Wet Locations.
4. Compact, Lightweight Design.
5. Safety Isolation between Primary and Secondary
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: output over-voltage, output over-current, output short circuit, auto-recovery.
8. EN61000-4-5: 2kV/4kV 8/20 usec transient protection.

Electrical Specifications at 25°C

- Input voltage range: 90-305Vac
- Frequency: 47 - 63Hz
- Power Factor: ≥ 0.90 at $\geq 70\%$ Load, 120Vac/230Vac, $\geq 90\%$ Load 277Vac
- THD%: $\leq 20\%$ at $\geq 60\%$ Load, 120Vac/230Vac/277Vac
- Inrush current: $<15A$ at 25C, 230V, cold start, Max. Load
- Input current: 0.25A at 120Vac, 60Hz, Maximum Load
- Efficiency: 85% typical at 230Vac full load.
- Line regulation accuracy: $\pm 3\%$
- Load regulation accuracy: $\pm 4\%$
- Leakage current: 300uA typical; Hold up time: half cycle

Constant Current Versions



IP66



Part Number ⁽²⁾	US Class 2	CN Class 2	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LD20W-57-C0350	YES	YES	19 - 57 Vdc	350 mA	$\pm 4\%$	20W	84%
LD20W-48-C0350	YES	YES	16 - 48 Vdc	350 mA	$\pm 4\%$	16.8W	83%
LD20W-43-C0460	YES	YES	15 - 43 Vdc	460 mA	$\pm 4\%$	20W	83%
LD20W-40-C0500	YES	YES	14 - 40 Vdc	500 mA	$\pm 4\%$	20W	82%
LD20W-36-C0550	YES	YES	12 - 36 Vdc	550 mA	$\pm 4\%$	20W	82%
LD20W-28-C0700	YES	YES	10 - 28 Vdc	700 mA	$\pm 4\%$	20W	81%
LD20W-24-C0830 ⁽⁵⁾	YES	YES	8 - 24 Vdc	830 mA	$\pm 4\%$	20W	81%
LD20W-22-C0910	YES	YES	7 - 22 Vdc	910 mA	$\pm 4\%$	20W	81%
LD20W-18-C1100	YES	YES	6 - 18 Vdc	1100 mA	$\pm 4\%$	20W	80%
LD20W-15-C1330	YES	YES	5 - 15 Vdc	1330 mA	$\pm 4\%$	20W	80%
LD20W-13-C1540	YES	YES	4 - 13 Vdc	1540 mA	$\pm 4\%$	20W	79%
LD20W-12-C1660 ⁽⁵⁾	YES	YES	4 - 12 Vdc	1660 mA	$\pm 4\%$	20W	78%

Notes

1. Typical efficiency measured at 230VAC input, full load
2. For dimmable versions add appropriate designator to the end of the part number: For Example: LD20W-18-C1400-RD is 0-10V or resistance dimmable version, LD20W-18-C1400-PD is PWM dimmable version.
-RD 0-10V & Resistance dimmable version comes with an extra two wires +Purple/-Grey on the output side.
-PD PWM Dimmable version comes with an extra two wires +Purple/-Grey on the output side.
3. -RD 0-10V Dimming is compatible with most quality 0-10V wall dimmers and direct 0-10V analog signal. See page 3 for details.
4. -PD PWM version is PWM Dimmable via a positive 10% to 100% Duty Cycle, 500Hz to 1.5KHz, 0-10V Pulse. See page 4 for details.
5. SAM Recognized.

20 Watt — LD20W Series


CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

Constant Voltage Versions

Part Number	US Class 2	CN Class 2	Output Constant Voltage	Output Current Range	Voltage Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LD20W-57	YES	NO	57 Vdc	88 - 350 mA	± 5%	20W	85%
LD20W-48	YES	NO	48 Vdc	88 - 350 mA	± 5%	16.8W	85%
LD20W-43	YES	NO	43 Vdc	115 - 460 mA	± 5%	20W	85%
LD20W-40	YES	NO	40 Vdc	125 - 500 mA	± 5%	20W	85%
LD20W-36	YES	YES	36 Vdc	138 - 550 mA	± 5%	20W	85%
LD20W-28	YES	YES	28 Vdc	175 - 700 mA	± 5%	20W	84%
LD20W-24 ⁽⁵⁾	YES	YES	24 Vdc	208 - 830 mA	± 5%	20W	84%
LD20W-22	YES	YES	22 Vdc	228 - 910 mA	± 5%	20W	84%
LD20W-18	YES	YES	18 Vdc	275 - 1100 mA	± 5%	20W	83%
LD20W-15	YES	YES	15 Vdc	333 - 1330 mA	± 5%	20W	83%
LD20W-13	YES	YES	13 Vdc	385 - 1540 mA	± 5%	20W	82%
LD20W-12 ⁽⁵⁾	YES	YES	12 Vdc	415 - 1660 mA	± 5%	20W	82%

Mechanical Dimensions: Inches [mm]

Material: Black PC ABS Plastic Case
Fully Encapsulated
Weight: 165 grams (5.8 oz) Typical

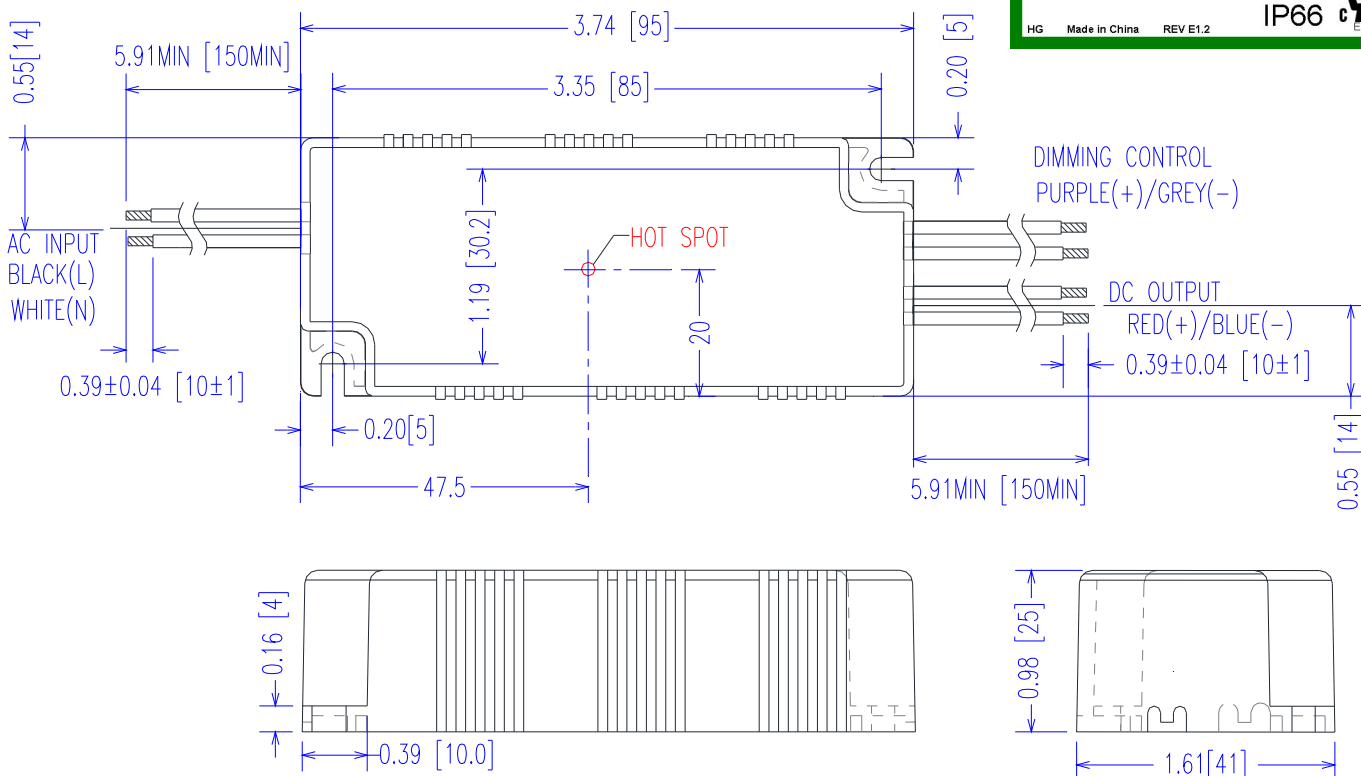

Labeling Example



DIMMING CONTROL
PURPLE(+)/GREY(-)

DC OUTPUT
RED(+)/BLUE(-)

20 Watt — LD20W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

20W
 LD20W Series
 DIMMING


-RD 2-Wire 0-10V CCR Dimming Scheme

Parameters	Minimum	Typical	Maximum
Source Current out of 0-10V Purple Wire	0mA	—	2mA
Absolute Voltage Range on 0-10V (+) Purple Wire	-2.0V	—	+15V
Sink Current into 0-10V Purple Wire	0mA	—	1.2mA


Notes

- RD 0-10V dimmable version comes with an extra two wires +Purple/-Grey on the output side.
- RD version is compatible with most 0-10V Wall Slide dimmers and direct 0-10V analog signal. Recommended dimmer is Leviton IP710 or equivalent
- RD 0-10V dimmable version is not intended to dim below about 5% @ 0V or 10% @ 1.0V
- RD 0-10V dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.


-RD 2-Wire Resistance Dimming Scheme

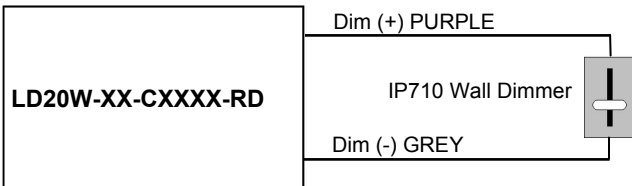

-RD 2-Wire 0-10V Analog Dimming Scheme

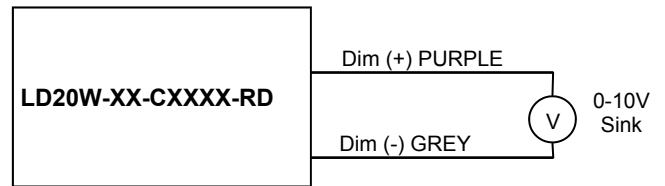

% Output Current vs. 0-10VDC Dimming Input

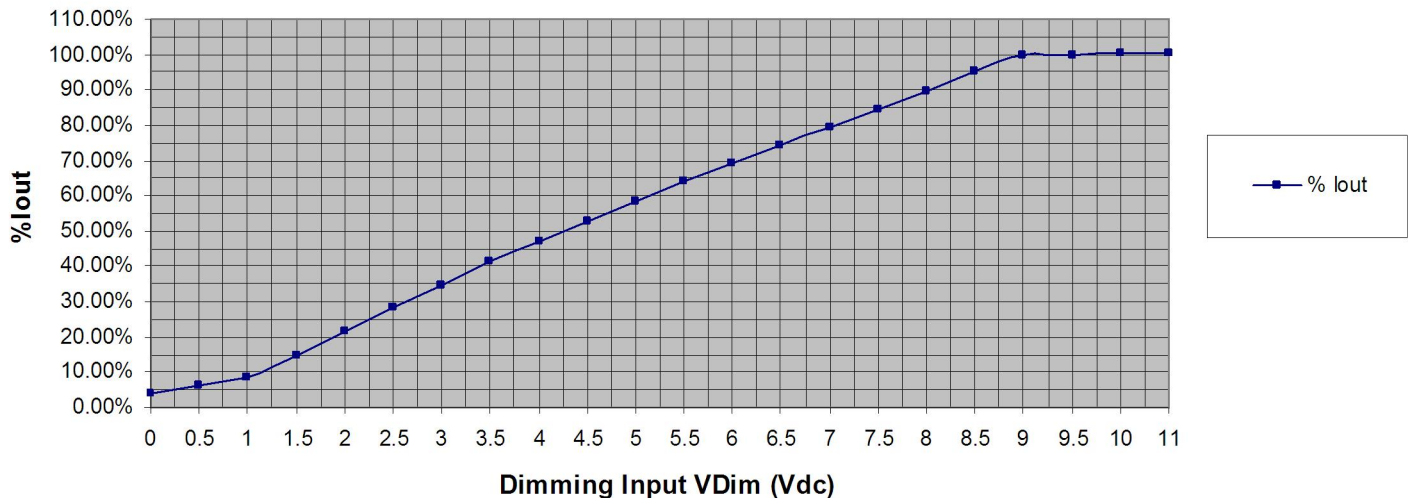

20 Watt — LD20W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING


-PD 2-Wire CCR PWM Positive Dimming Scheme

Parameters	Minimum	Typical	Maximum
Absolute Maximum Voltage Range on PWM Input (Purple Wire)	-2.0V	10V	+15V
Input LOW Level Voltage Range (Purple Wire)	-2.0V	0V	+5.5V
Input HIGH Level Voltage Range (Purple Wire)	+9.0V	10V	+15V
Current into PWM Input (Purple Wire)	0mA	—	1.2mA
Source Current out of PWM Input (Purple Wire)	0mA	—	2mA
PWM Input Signal Frequency	500Hz	—	1500Hz
PWM Input Signal Positive Duty Cycle	0%	10-90%	100%


Notes

1. -PD PWM Dimmable version comes with an extra 2 wires +Purple/-Grey on the output side.
2. -PD PWM Dimmable version is not intended to dim below about 5% @ 0% Duty Cycle or 10% @ 10% Duty Cycle
3. -PD PWM dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.

-PD 2-Wire PWM Positive Dimming Scheme

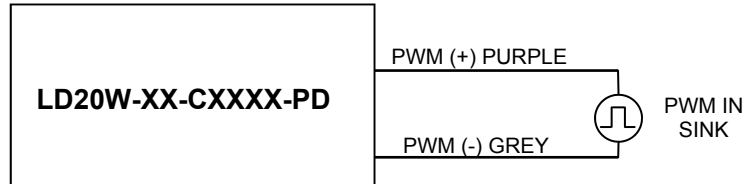

% Output Current vs. 1.0 kHz, Positive Duty Cycle Dimming Input

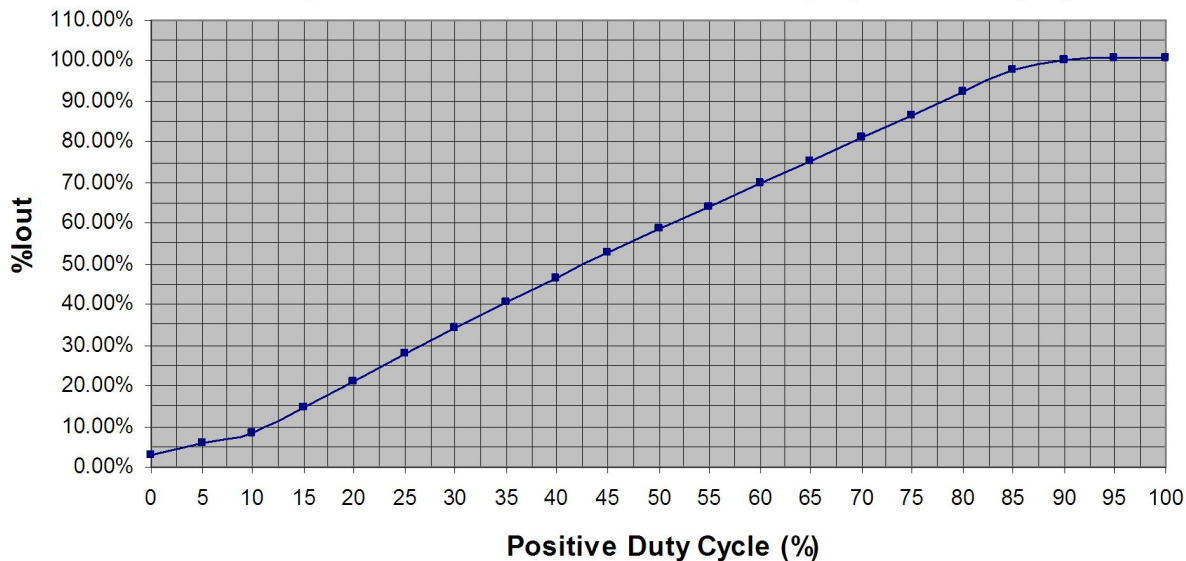

20 Watt — LD20W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

DIMMING
LD20W Series
20W

Input Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Input Voltage	90 Vac	—	305 Vac	120, 230, 240, 277 Vac Nominal Values
Input Frequency	47 Hz	—	63 Hz	50/60Hz Nominal
Input AC Current	—	—	0.25 A	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.13 A	Measured at 230Vac/50Hz Input, Output Full load.
	—	—	0.11 A	Measured at 277Vac/60Hz Input, Output Full load.
Inrush Current (Peak)	—	—	50A	Measured at 277Vac/60Hz Input, Output Full Load, Ta 25°C, Cold Start 50% I _{peak} duration \approx 250 μ sec (1/2*I _p ² *t)
Inrush Current (I ² t)	—	—	0.31 A ² s	
Leakage Current	—	—	0.28mA	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.75mA	Measured at 277Vac/60Hz Input, Output Full load.
THD	—	—	20%	Measured at \geq 60% Load, 120Vac/230Vac/277Vac
Power Factor (PF)	0.90	—	—	Measured at \geq 70% Load, 120Vac/230Vac, \geq 90% Load 277Vac

Output Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
DC Output Voltage	Per Table	—	Per Table	Per Tables on Page 1
DC Output Constant Current	-5%	Per Table	+5%	Per Tables on Page 1
Output Power	—	—	Per Table	Per Tables on Page 1 (+ [12V@200mA, 2.4W Auxiliary])
Ripple & Noise (V _{pk-pk})	—	—	20% V _o	20 MHz BW, Full load output in parallel with 0.1 μ F ceramic & 10 μ F Electrolytic.
Ripple (I _{pk-pk})	—	—	50% I _o	20 MHz BW, Full load output in parallel with 0.1 μ F ceramic & 10 μ F Electrolytic. 120 Hz component (Flicker Free)
Start-up Time	—	200 mS	800 mS	Measured at 120Vac/60Hz Input, Output Full load.
Hold-up Time	—	30 mS	—	Typical @ 277Vac Input, Output Full load.

Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Case Temperature (T _c)	-30 °C	—	+90 °C	Measured at location specified on case.
Operating Temperature (T _a)	-30 °C	—	+60 °C	This is a reference range. T _c controls temperature range.
Storage Temperature (T _s)	-40 °C	—	+85 °C	Non operating temperature range.
Operating Humidity	—	—	95% RH	Relative Humidity, non-condensing.
Vibration	5 Hz	—	55 Hz	2G, 10 minutes/1 cycle, period 30 minutes, each along X, Y, Z axis.
MTBF	530,000 Hours	—	—	MIL-HDBK-217F Notice 2, T _a = 25C, Output Full Load.

Protection Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Output Short Circuit (SCP)	—	—	—	No Damage, Auto recovery after short is removed.
Output Over Current (OCP)	—	—	+8% I _o	Constant Current Limiting circuit.
Output Over Voltage (OVP)	—	—	120% V _o	No Damage, Auto recovery after fault is removed.

20 Watt — LD20W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING


Safety Recognized

Safety	Notes/Standards
UL/CUL Recognized	UL8750 & CAN/CSA C22.2 No. 250.13
CE	EN61347-1, EN61347-2-13
Withstand Voltage	Input to Output: 3750 Vac
Isolation Resistance	Input to Output: >100 MΩ, 500VDC @ 25 °C, 70 % RH
Dimming	Dim+ Purple/Dim- Gray are considered part of the secondary circuit.

EMC Certified

Standard	Notes/Conditions
FCC, 47CFR Part 15	Class B
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN 61000-3-2	Part 3-2: Limits for harmonic current emissions Class C, $\geq 80\%$ Rated Power
EN 61000-3-3	Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker.
EN 61000-4-5	Part 4-5: Surge Immunity test, 2 kV L-N, 4 kV L-FG & N-FG
Energy Star	Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.

Power Factor Curves (Typical)

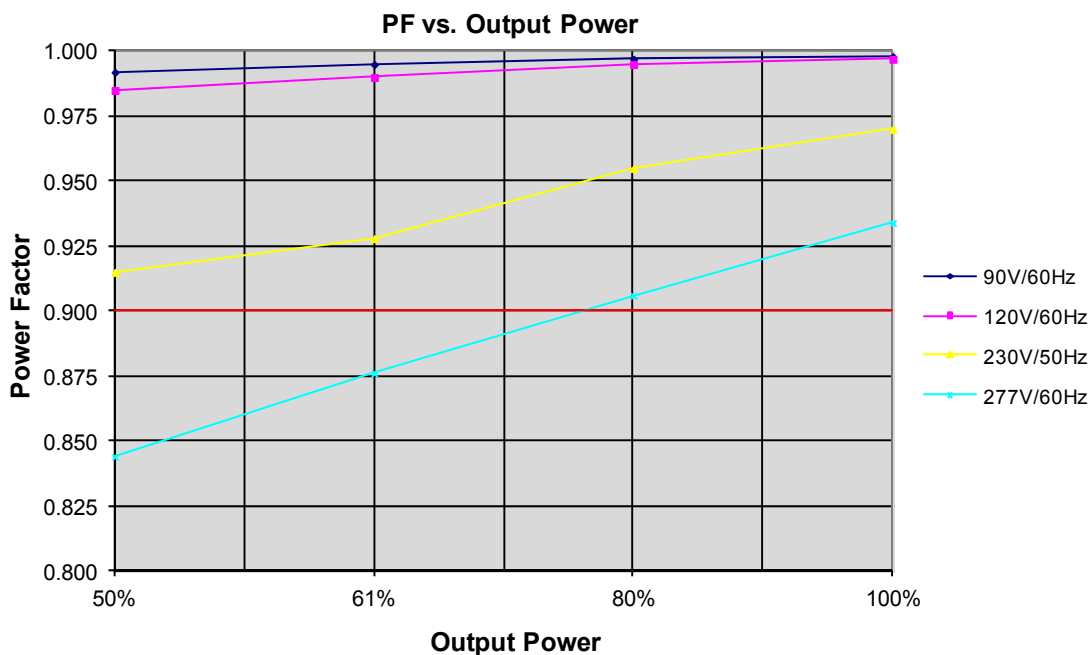


20 Watt — LD20W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

20W
 LD20W Series
 DIMMING


THD Curves (Typical)

THD vs. Output Power

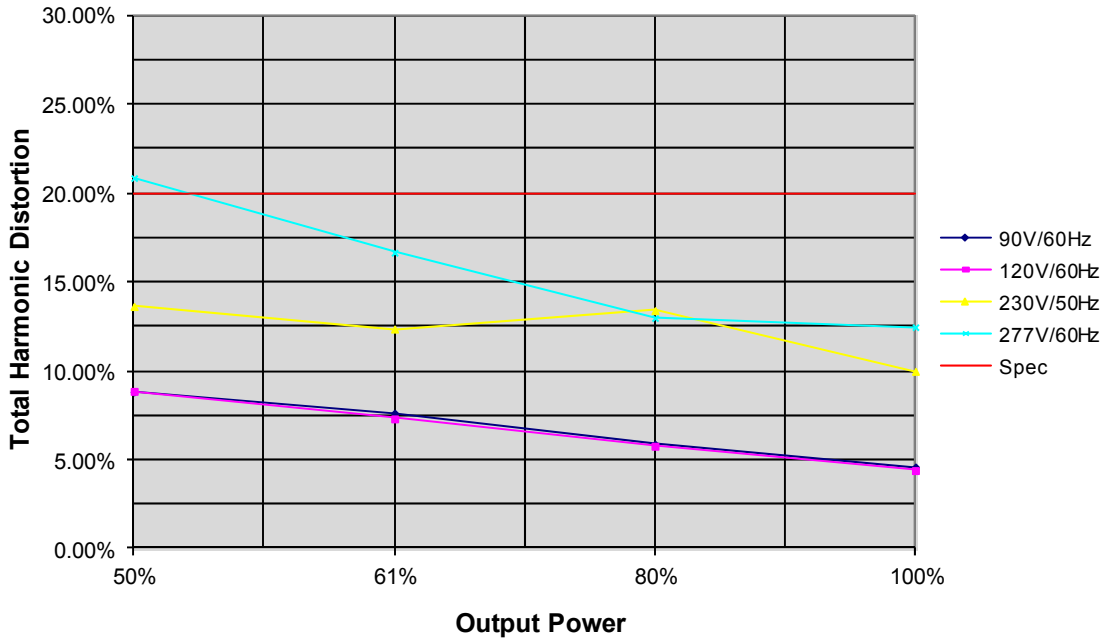

Efficiency Curve (Typical)

Efficiency vs. Output Power

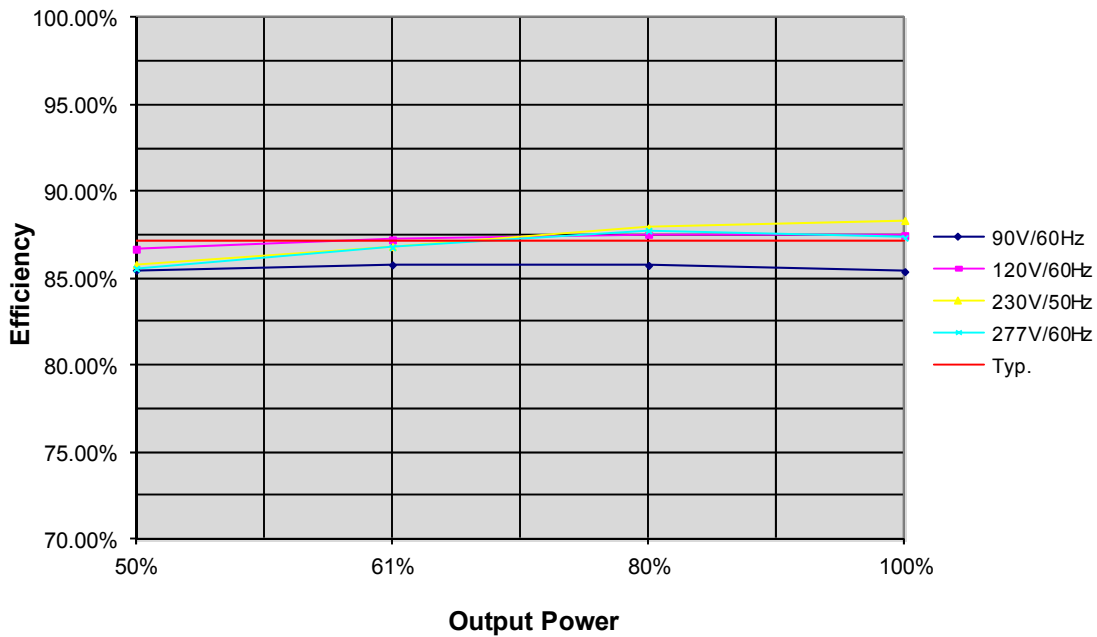


20 Watt — LD20W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

Life vs. Ambient Temperature

LD20W Estimated Life Full Load @ 120Vac

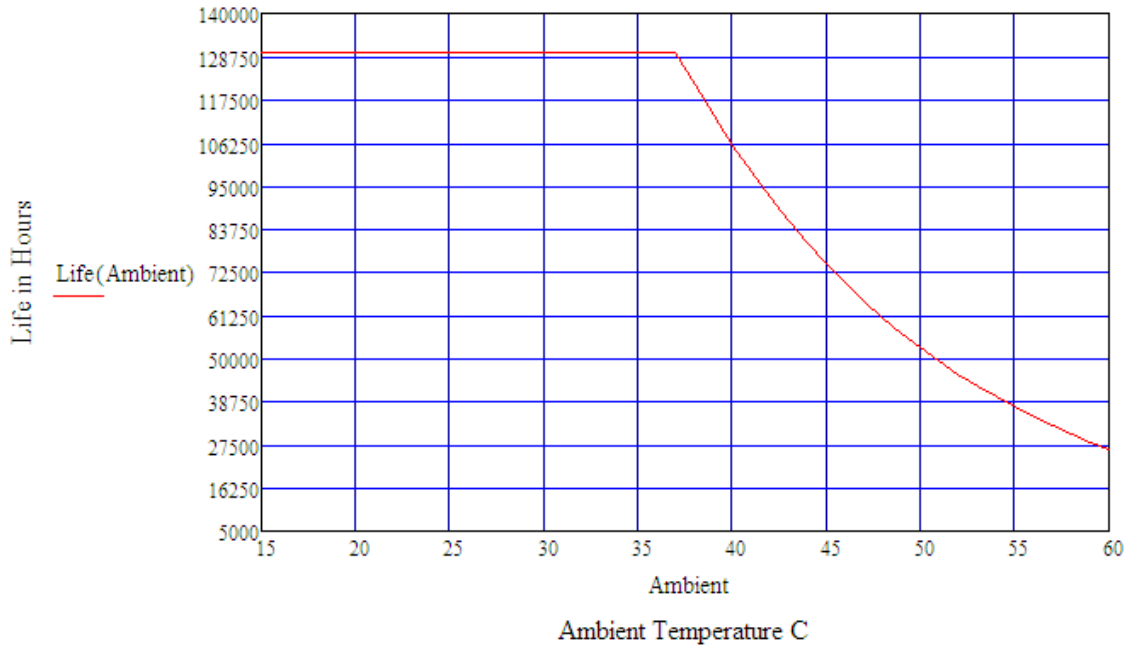

Life vs. Case (Tc) Temperature

LD20W Estimated Life Full Load @ 120Vac

