


LTCC Bandpass Filter

BFCN-7900+

50Ω 7800 to 8100 MHz



CASE STYLE: FV1206-4

The Big Deal

- Small size 3.2mm x 1.6mm
- Pass band (7800-8100 MHz)
- Low Insertion Loss (1.6 dB typical)
- Sharp rejection peaks close to stop band

Product Overview

The BFCN-7900+ LTCC Band Pass Filter is constructed with 5 layers in order to achieve a miniature size and high repeatability of performance. Wrap-around terminations minimize variations in performance due to parasitics. Covering 7900 MHz \pm 150 MHz, these units offer low insertion loss and good rejection at the band reject edges.

Key Features

| Feature | Advantages |
|------------------------------------|---|
| Small Size (3.20mm x1.6 mm) | Allows for high layout density of circuit boards, while minimizing affects of parasitics. |
| Rejection peaks close to pass band | Provides good rejection of signals close to the pass band, for improved system performance. |
| Wrap around termination | Provides excellent solderability and easy visual inspection capability. |
| LTCC construction | Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes. |

Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Bandpass Filter

BFCN-7900+

50Ω 7800 to 8100 MHz



Generic photo used for illustration purposes only

CASE STYLE: FV1206-4

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

| Reel Size | Devices/Reel |
|-----------|-----------------------------------|
| 7" | 20, 50, 100, 200, 500, 1000, 3000 |

Maximum Ratings

| | |
|-----------------------|-----------------|
| Operating Temperature | -55°C to 100°C |
| Storage Temperature | -55°C to 100°C |
| RF Power Input* | 2W max. at 25°C |


*Passband rating, derate linearly to 0.5W at 100°C ambient
Permanent damage may occur if any of these limits are exceeded.

Pin Connections


| | |
|--------|-----|
| RF IN | 1 |
| RF OUT | 3 |
| GROUND | 2,4 |

Product Marking: 46

Outline Drawing



PCB Land Pattern




Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | H | J |
|------|------|------|------|------|------|------|-------|------|
| .126 | .063 | .037 | .026 | .075 | .012 | .182 | .104 | .069 |
| 3.20 | 1.60 | 0.94 | 0.66 | 1.91 | 0.30 | 4.62 | 2.64 | 1.75 |
| K | L | M | N | P | Q | R | wt | |
| .119 | .041 | .039 | .013 | .024 | .020 | .039 | grams | |
| 3.02 | 1.04 | 0.99 | 0.33 | 0.61 | 0.51 | 0.99 | .020 | |

Demo Board MCL P/N: TB-518+

Suggested PCB Layout (PL-305)

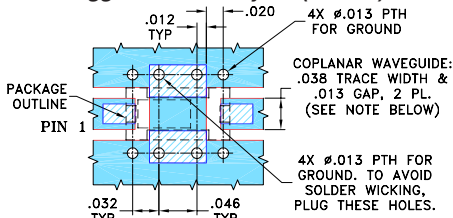

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- Small size
- Temperature stable
- Hermetically sealed
- LTCC construction

Applications

- Harmonic Rejection
- Transmitters / Receivers


Electrical Specifications^{1,2} at 25°C

| Parameter | F# | Frequency (MHz) | Min. | Typ. | Max. | Unit |
|------------------|------------------|-----------------|------------|------|------|------|
| Pass Band | Center Frequency | — | — | 7900 | — | MHz |
| | Insertion Loss | F1-F2 | 7800-8100 | — | 1.6 | dB |
| | VSWR | F1-F2 | 7800-8100 | — | 1.4 | :1 |
| Stop Band, Lower | Insertion Loss | DC-F3 | DC-6800 | — | 20 | dB |
| | VSWR | DC-F3 | DC-6800 | — | 30 | :1 |
| Stop Band, Upper | Insertion Loss | F4-F5 | 9500-15000 | — | 20 | dB |
| | VSWR | F4-F5 | 9500-15000 | — | 30 | :1 |


1. Measured on Mini-Circuits Characterization Test Board TB-518+.

2. This filter is not intended for use as a DC Blocking circuit element. In Application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.

Typical Frequency Response



Functional Schematic

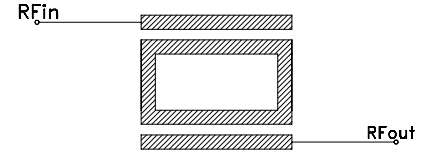

Typical Performance Data at 25°C

| Frequency (MHz) | Insertion Loss (dB) | VSWR (:1) |
|-----------------|---------------------|-----------|
| 100.00 | 49.20 | 1737.18 |
| 800.00 | 31.26 | 347.44 |
| 1500.00 | 26.19 | 217.15 |
| 2550.00 | 22.54 | 108.58 |
| 5000.00 | 19.55 | 39.49 |
| 6050.00 | 60.50 | 66.82 |
| 6750.00 | 35.42 | 48.26 |
| 7800.00 | 1.66 | 1.30 |
| 8000.00 | 1.60 | 1.48 |
| 9000.00 | 13.50 | 11.46 |
| 9300.00 | 20.39 | 16.89 |
| 12050.00 | 20.88 | 11.69 |
| 13550.00 | 22.36 | 8.81 |
| 14050.00 | 22.00 | 8.60 |
| 15050.00 | 23.77 | 8.68 |

