


- Reinforced I/O-isolation 4200 VAC rated for 1000 VAC working voltage
- Ultra-high isolation peak voltage 8000 VDC (1s)
- Common Mode Transient Immunity (dv/dt) 15 kV/μs
- Operating temperature range -40 to +76°C
- Low no-load power consumption 240 – 480 mW
- Internal EN 55032 class A filter
- High efficiency up to 90%
- 2:1 input voltage range: 9-18, 18-36, 36-75 VDC
- Protection against overload, overvoltage and short circuit
- 3-year product warranty

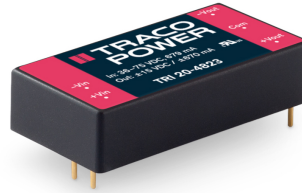

The new TRI 20 is a high isolation, regulated 20 Watt DC/DC converter series which comes in a compact 2"x1" package. The core characteristic of the TRI 20 series is a sophisticated reinforced isolation system which is able to withstand high test voltages (8000 VDC for 1s and 4200 VAC for 60s) and working voltages (1000 VACrms). Complementing this isolation characteristic is a high Common Mode Transient Immunity of 15 kV/μs. The new design allows to fully integrate an EN 55032 class A filter and greatly reduces the no-load power consumption. High efficiencies up to 90% allow safe operation from -40°C to +55°C without derating and up to +76°C with derating. All models have a wide 2:1 input voltage range and precisely regulated, isolated output voltages. With the latest IT safety certifications (IEC/EN/UL 62368-1) the TRI 20 series is the perfect choice for many demanding applications in the industrial, transportation and instrumentation sectors.

Models

| Order Code | Input Voltage Range | Output 1 | | Output 2 | | Efficiency typ. |
|-------------|------------------------------|----------|------------------|----------|------------------|-----------------|
| | | Vnom | I _{max} | Vnom | I _{max} | |
| TRI 20-1211 | 9 - 18 VDC (12 VDC nom.) | 5.1 VDC | 4'000 mA | | | 85 % |
| TRI 20-1212 | | 12 VDC | 1'670 mA | | | 88 % |
| TRI 20-1213 | | 15 VDC | 1'333 mA | | | 88 % |
| TRI 20-1215 | | 24 VDC | 840 mA | | | 89 % |
| TRI 20-1222 | | +12 VDC | 840 mA | -12 VDC | 840 mA | 89 % |
| TRI 20-1223 | | +15 VDC | 670 mA | -15 VDC | 670 mA | 89 % |
| TRI 20-2411 | 18 - 36 VDC (24 VDC nom.) | 5.1 VDC | 4'000 mA | | | 87 % |
| TRI 20-2412 | | 12 VDC | 1'670 mA | | | 88 % |
| TRI 20-2413 | | 15 VDC | 1'333 mA | | | 89 % |
| TRI 20-2415 | | 24 VDC | 840 mA | | | 90 % |
| TRI 20-2422 | | +12 VDC | 840 mA | -12 VDC | 840 mA | 90 % |
| TRI 20-2423 | | +15 VDC | 670 mA | -15 VDC | 670 mA | 90 % |
| TRI 20-4811 | 36 - 75 VDC (48 VDC nom.) | 5.1 VDC | 4'000 mA | | | 87 % |
| TRI 20-4812 | | 12 VDC | 1'670 mA | | | 88 % |
| TRI 20-4813 | | 15 VDC | 1'333 mA | | | 90 % |
| TRI 20-4815 | | 24 VDC | 840 mA | | | 89 % |
| TRI 20-4822 | | +12 VDC | 840 mA | -12 VDC | 840 mA | 89 % |
| TRI 20-4823 | | +15 VDC | 670 mA | -15 VDC | 670 mA | 90 % |

Input Specifications

| | | |
|--------------------------|----------------|--|
| Input Current | - At no load | 12 Vin models: 20 mA typ. 24 Vin models: 15 mA typ. 48 Vin models: 10 mA typ. |
| | - At full load | 12 Vin models: 1'910 mA typ. 24 Vin models: 945 mA typ. 48 Vin models: 475 mA typ. |
| Surge Voltage | | 12 Vin models: 25 VDC max. (100 ms max.) 24 Vin models: 50 VDC max. (100 ms max.) 48 Vin models: 100 VDC max. (100 ms max.) |
| Under Voltage Lockout | | 12 Vin models: 7.5 VDC typ. 24 Vin models: 15 VDC typ. 48 Vin models: 33 VDC typ. |
| Reflected Ripple Current | | 12 Vin models: 100 mAp-p typ. 24 Vin models: 50 mAp-p typ. 48 Vin models: 30 mAp-p typ. |
| Recommended Input Fuse | | (The need of an external fuse has to be assessed in the final application.) |
| Input Filter | | Internal Pi-Type |

Output Specifications

| | | |
|--|--------------------------------------|--|
| Voltage Set Accuracy | | ±1% max. |
| Regulation | - Input Variation (Vmin - Vmax) | single output models: 0.5% max. dual output models: 0.5% max. |
| | - Load Variation (0 - 100%) | single output models: 0.5% max. dual output models: 1% max. (Output 1) 1% max. (Output 2) |
| | - Voltage Balance (symmetrical load) | dual output models: 2% max. |
| Ripple and Noise (20 MHz Bandwidth) | - single output | 5.1 Vout models: 50 mVp-p typ. (w/ 4.7 µF MLCC) 12 Vout models: 100 mVp-p typ. (w/ 4.7 µF MLCC) 15 Vout models: 100 mVp-p typ. (w/ 4.7 µF MLCC) 24 Vout models: 150 mVp-p typ. (w/ 4.7 µF MLCC) |
| | - dual output | 12 / -12 Vout models: 100 / 100 mVp-p typ. (w/ 4.7 µF MLCC) 15 / -15 Vout models: 100 / 100 mVp-p typ. (w/ 4.7 µF MLCC) |
| Capacitive Load | - single output | 5.1 Vout models: 6'800 µF max. 12 Vout models: 1'160 µF max. 15 Vout models: 750 µF max. 24 Vout models: 295 µF max. |
| | - dual output | 12 / -12 Vout models: 590 / 590 µF max. 15 / -15 Vout models: 380 / 380 µF max. |
| Minimum Load | | Not required |
| Temperature Coefficient | | ±0.02 %/K max. |
| Start-up Time | | 30 ms max. |
| Short Circuit Protection | | Continuous, Automatic recovery |
| Output Current Limitation | | 150% typ. of Iout max. |
| Overvoltage Protection | | 120% typ. of Vout nom. |
| Transient Response | - Response Deviation | 5% max. (75% to 100% Load Step) |
| | - Response Time | 300 µs typ. (75% to 100% Load Step) |

Safety Specifications

| | | |
|------------------|-----------------------------|--|
| Safety Standards | - IT / Multimedia Equipment | EN 62368-1 IEC 62368-1 UL 62368-1 |
| | - Certification Documents | www.tracopower.com/overview/tri20 |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

| | |
|-----------------------|--------|
| Pollution Degree | PD 2 |
| Over Voltage Category | OVC II |

EMC Specifications

| | | |
|---------------|-----------------------------|--|
| EMI Emissions | - Conducted Emissions | EN 55032 class A (internal filter) EN 55032 class B (with external filter) FCC Part 15 class A (internal filter) |
| | - Radiated Emissions | EN 55032 class A (internal filter) FCC Part 15 class A (internal filter) |
| | | External filter proposal: www.tracopower.com/overview/tri20 |
| EMS Immunity | - Electrostatic Discharge | Air: EN 61000-4-2, ±15 kV, perf. criteria A Contact: EN 61000-4-2, ±8 kV, perf. criteria A |
| | - RF Electromagnetic Field | EN 61000-4-3, 10 V/m, perf. criteria A |
| | - EFT (Burst) / Surge | EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±1 kV, perf. criteria A |
| | - Conducted RF Disturbances | Ext. input component: 12 & 24 Vin models: KY 560 µF // V15P8-M3 48 Vin models: KY 560 µF // V15P10 |
| | - PF Magnetic Field | Continuous: EN 61000-4-6, 10 Vrms, perf. criteria A EN 61000-4-8, 100 A/m, perf. criteria A |

General Specifications

| | | |
|--------------------------------|---------------------------------|--|
| Relative Humidity | | 95% max. (non condensing) |
| Temperature Ranges | - Operating Temperature | -40°C to +76°C |
| | - Case Temperature | +95°C max. |
| | - Storage Temperature | -50°C to +125°C |
| Power Derating | - High Temperature | Depending on model |
| | | See application note: www.tracopower.com/overview/tri20 |
| Cooling System | | Natural convection (20 LFM) |
| Altitude During Operation | | 4'000 m max. |
| Switching Frequency | | 285 kHz typ. (PWM) |
| Insulation System | | Reinforced Insulation |
| Working Voltage (rated) | | 1'000 VAC |
| Isolation Test Voltage | - Input to Output, 60 s | 4'200 VAC |
| | - Input to Output, 1 s | 8'000 VDC |
| Isolation Resistance | - Input to Output, 500 VDC | 10'000 MΩ min. |
| Isolation Capacitance | - Input to Output, 100 kHz, 1 V | 80 pF max. |
| Common Mode Transient Immunity | | 15 kV/µs min. |
| Reliability | - Calculated MTBF | 1'087'000 h (MIL-HDBK-217F, ground benign) |
| Washing Process | | Allowed (hermetical product) |
| | | See Cleaning Guideline: www.tracopower.com/info/cleaning.pdf |
| Housing Material | | Non-conductive Plastic (UL 94 V-0 rated) |
| Potting Material | | Silicone (UL 94 V-0 rated) |
| Pin Material | | Copper Alloy (C6801) |
| Pin Foundation Plating | | Nickel (2 - 4 µm) |
| Pin Surface Plating | | Tin (5 - 7 µm), matte |
| Housing Type | | Plastic Case |
| Mounting Type | | PCB Mount |
| Connection Type | | THD (Through-Hole Device) |
| Footprint Type | | 2" x 1" |
| Soldering Profile | | Wave Soldering |
| | | 260°C / 10 s max. |
| Weight | | 30 g |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Environmental Compliance - REACH Declaration

www.tracopower.com/info/reach-declaration.pdf

- RoHS Declaration

REACH SVHC list compliant

REACH Annex XVII compliant

www.tracopower.com/info/rohs-declaration.pdf

Exemptions: 7a


(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).
The SCIP number is provided on request.)

Supporting Documents

[Overview Link](#) (for additional Documents)

www.tracopower.com/overview/tri20

Outline Dimensions

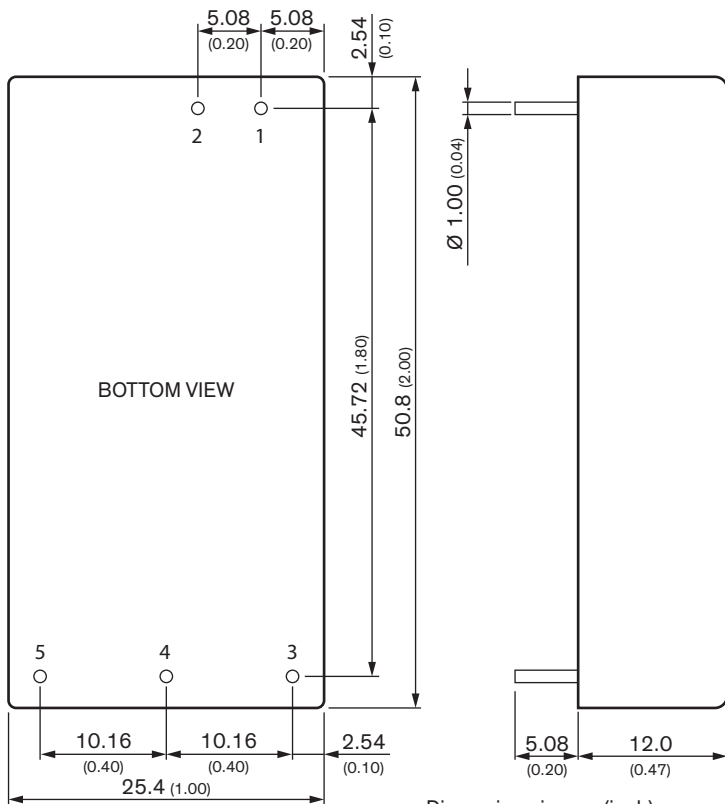

Dimensions in mm (inch)
Tolerances ± 0.5 (± 0.02)
Pin $\varnothing 0.5 \pm 0.05$ (0.02 ± 0.002)

Pinout

| Pin | Single Output | Dual Output |
|-----|---------------|-------------|
| 1 | +Vin (Vcc) | +Vin (Vcc) |
| 2 | -Vin (GND) | -Vin (GND) |
| 3 | +Vout | +Vout |
| 4 | No pin | Common |
| 5 | -Vout | -Vout |