



UNIT:mm

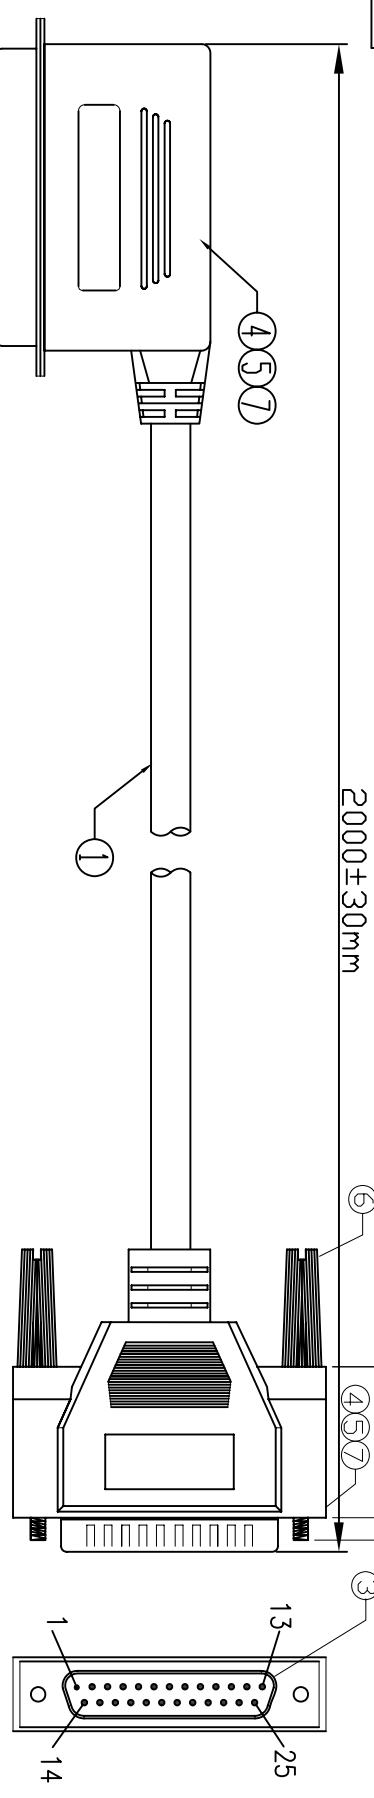

(Mould NO.:WM-017)
(Mould NO.:NM-33)

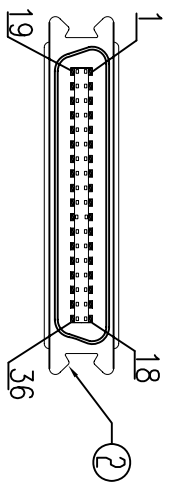

P1 (BAFO MOLD CN36 T/N:C-003A)

- Electronic Test:
- 1.100% Test,(Open,Short,Miss Wire)
 - 2.Contact Resistance:3 ohm max.
 - 3.Insulation Resistance:20M ohm min.
 - 4.Hi-Pot:100V DC/10ms

PIN ASSIGNMENT							
P1	P2	P1	P2	P1	P2	P1	P2
1	BLACK	1	WHITE	10	WHITE/BLACK	19	WHITE/BLACK
2	BROWN	2	PINK	11	RED/WHITE	20	RED/WHITE
3	RED	3	GREEN(LIGHT)	12	ORANGE/WHITE	21	ORANGE/WHITE
4	ORANGE	4	RED/BLACK	13	GREEN/WHITE	22	GREEN/WHITE
5	YELLOW	5	ORANGE/BLACK	14	BLUE/WHITE	23	BLUE/WHITE
6	GREEN	6	YELLOW/BLACK	15	VIOLET/WHITE	24	VIOLET/WHITE
7	BLUE	7	GREEN/BLACK	16	BROWN/WHITE	25	BROWN/WHITE
8	VIOLET	8	BLUE/BLACK	17	SHELL	25	SHELL
9	GREY	9	VIOLET/BLACK	18			

NO.	NAME	Q'TY	SPECIFICATION
①	CABLE	1	NOUL 28#(7/0.12)*25C+D+AL/MY JACKET BEIGE(V-29) OD:7.0±0.15mm. L2020+20/-0mm.
②	CONN	1	CN 36P MALE SODER TYPE PIN G/F SHELL NI-PLATED INSULATOR COLOR:BLUE
③	CONN	1	DB 25PIN MALE PIN G/F SHELL-NICKEL SOLDER TYPE INSULATION COLOR BLUE
④	IN JACKET	23g	CLEAR LD-PE
⑤	OUT JACKET	72g	BEIGE(V-29) 40P PVC
⑥	SCREW	2	#4-40UNC TYPE D-E L=30mm,NICKEL PLATED,MOLD:BEIGE(V-29) ABS
⑦	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*L15MM


Cnc Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	700-10098-00200
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITION	A/0	PRODUCTION	

4 3 2 1

UNIT:mm

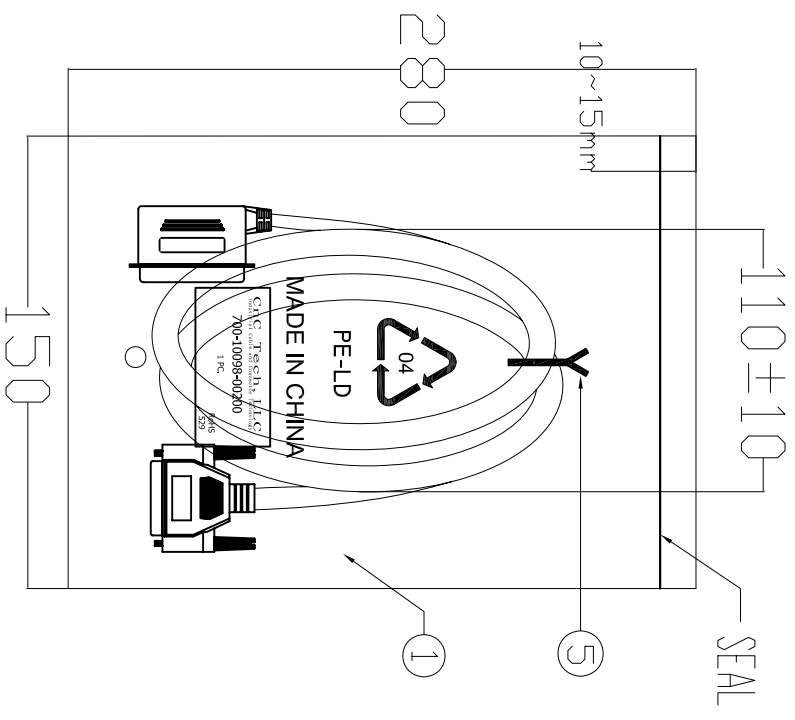

⑤	TIE	1	TIE WHITE L=120mm.
④	PE BAG	1/50	透明防水袋31"×31"×0.04mm.
③	CARTON	1/50	46*30*25CM K&K 粘口
②	PE BAG	1/10	CLEAR SIZE: 360*380*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS" 及印生产周期,有透气孔.
①	PE BAG	1	CLEAR SIZE: 150*280*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC" 及印生产周期,有透气孔.
NO.	NAME	Q'TY	SPECIFICATION

CNC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	700-10098-00200
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITION	A/0	PROJECTION	

