

CABLE MODEM MAGNETICS

RF Splitter/Combiner

CM03401


- High isolation splitter
- Excellent amplitude balance
- Ideal for cable distribution equipment and set top box applications
- Operating bandwidth optimized for upstream and downstream data paths
- Operating temperature -40° to +85° C
- Designed to withstand 225° C peak IR reflow temperature

ELECTRICAL SPECIFICATIONS at 25° C

Frequency MHz	Z Ω	Insertion Loss dB max +3dB loss			Return Loss dB min		Isolation dB min		Amplitude Unbalance dB max	
		1MHz to 50MHz	50MHz to 600MHz	600MHz to 1GHz	1MHz to 50MHz	50MHz to 1GHz	1MHz to 50MHz	50MHz to 1GHz	1MHz to 50MHz	50MHz to 1GHz
5 - 1000	75	0.5	0.85	1.2	13	18	20	25	1.2	0.8

SCHEMATIC





S554-5999-14

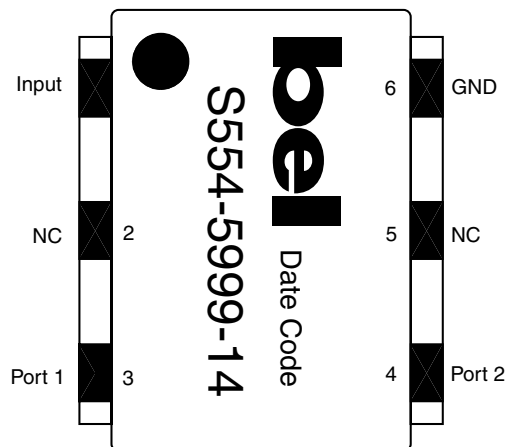

CM03401

MECHANICAL

S554-5999-14

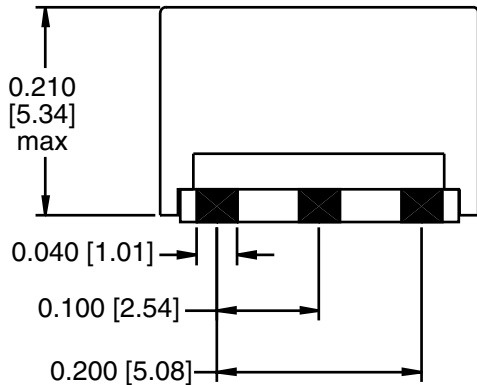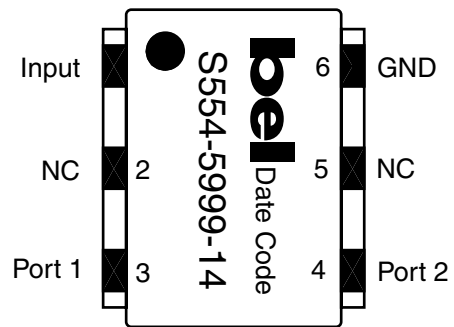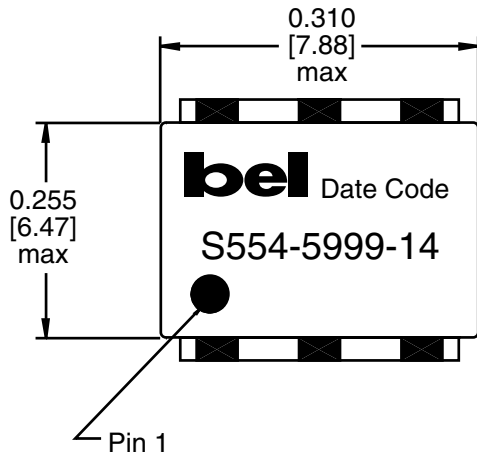

©2004 Bel Fuse Inc. Specifications subject to change without notice. 02.04

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com