

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.



**Ratings**

Use Group	B	D
Rated Voltage	300V	300V
Rated Current	15A	10A
Rated Wire Size		
solid	AWG 22-14	AWG 22-14
flexible	AWG 22-14	AWG 22-14

Screw Size M2.6


**Insulating Material**

Material PA 6.6  
Flammability Class UL 94 V-0

**Materials**

Clamp Brass  
Screw Stainless Steel  
Solder Tag Steel  
Temperature Range -40° C ~ 105° C

RoHS Compliant

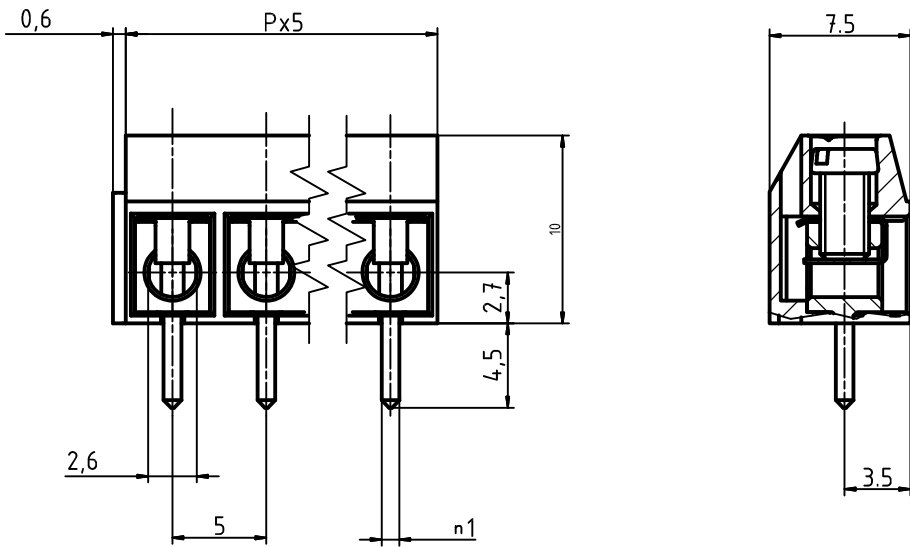

Part No.: **ED500/XDS**

No. of Poles  
02 2 Poles  
03 3 Poles  
... ..  
12 12 Poles

⚠			
SIGN	DESCRIPTION	CHK.	DATE

DWG	WF. Zhang	DATE	2017.09.11	UNITS:	MM	SHEET:	1 OF 1	Tolerance
CHK.	WF. Zhang	DATE	2017.09.11	SCALE:	NONE 5:1 ( : )	REV:	A	X. ±0.50
APP.		DATE		TITLE:	ED500DS series 5.00 mm, one piece wire protector, horizontal wire entry			X.XX ±0.30
				PART NO.	ED500/XDS			X° ±1°
				DWG NO.	ED500/XDS.DWG			Ⓢ Ⓜ



ON-SHORE TECHNOLOGY, INC.