




ANTENNA TECHNOLOGIES LIMITED COMPANY

# Model VG2430L1TM11ISSA Omnidirectional Antenna

## Key Features


- Encased in a heavy wall fiberglass radome for superior weather resistance
- Rugged unity gain omni is optimized for wide bandwidth and all weather performance
- Broad vertical beamwidth provides wide area coverage with **no field tuning required** to obtain maximum performance

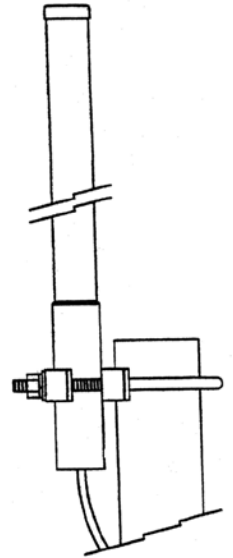

Electrical Specifications	VG2430L1TM11ISSA
Frequency Range, MHz	2300-2500
Polarization	Vertical
Gain dBd	Unity
VSWR (50 Ohms)	1.2:1 typical
2:1 Bandwidth MHz	100 minimum; 200 typical
3 dB Beamwidth E/H Planes, degrees	77/360
Maximum Power, watts	30*
Cable type/length	LMR195 11"
Connector	Straight TNC (M)

\*Limited by feedline. Higher power ratings are available as an option.

TOP VIEW



Mechanical Specifications	VG2430L1TM11ISSA
Overall Length, inches	13.22"
Radome Material	1.0"OD; .125" wall Fiberglass
Element Material	All-Brass components
Mast Diameter, inches (cm)	1.25-2.00 (3.2-5.1)
Mounting	Stud Spring Base
Wind Surface Areas, feet	.071 (.007)
Wind Survival, mph (kph)	150 (240)
Weight, pounds (kg)	1.5 (.68)

22560 Glenn Drive #114 | Sterling, Virginia 20164  
[www.atcllc.com](http://www.atcllc.com) [sales@atcllc.com](mailto:sales@atcllc.com)  
Office: 703-450-5517

ATLC products for military use may be subject to U.S. ITAR EXPORT CONTROLS, an export license may be required.