


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: 9205-HS  
INSULATOR: HEAT SHRINK TUBING 221. BLACK.  
BODY: BRASS. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.  
CONTACT: BeCu OR PHOSPHOR BRONZE. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.
- P/N: 9202COLOR  
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
FRAME: BRASS. NICKEL PLATED.  
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.
- P/N: W-200/COLOR  
22AWG 65X40 TINNED COPPER  
0.070 [1.78] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
- PERFORMANCE  
MAXIMUM CURRENT: 2.5 AMPS  
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

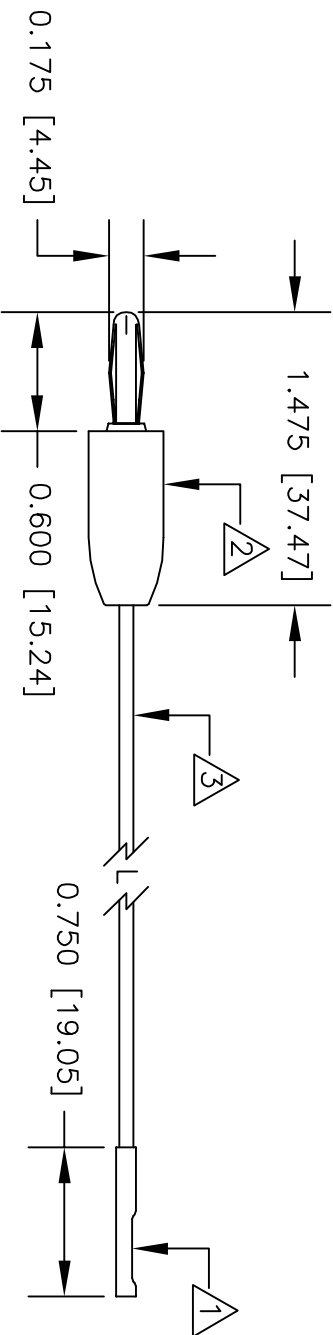

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
		± .XX ± .XXX ±		APPROVALS	
		MATERIAL SEE NOTE.		DATE	
		FINISH SEE NOTE.		DRAWN R.L. 10/10	
		APPLICATION USED ON		APPROVED BY	
		DO NOT SCALE DRAWING			
		DESCRIPTION		E-Z-HOOK <sup>®</sup> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
		0.025 [0.64] SQ. SOCKET TO STD BAN PLUG (9202)		SIZE CODE IDENT. NO. DRAWING NO.	
		A 08505 9166		REV.	
		SCALE 1:1		SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.