



WTX EXTERNAL WIRELESS DIPOLE ANTENNA

The evolution of technology has brought the need to communicate everywhere and at all times without being confined to one space. Laird Technologies' practical and rugged external wireless device antennas are designed to fit into the portable devices used in office, industrial and home environments. The external wireless antenna feature flexible elements and many are ½ wave coaxial dipole designs for reduced ground dependence and improved performance.

FEATURES

- Covers 2.3 to 2.7 GHz and 3.3 to 3.9 GHz
- Support all WiMAX operating frequency bands in one solution
- Connector mount
- Omnidirectional gain patterns
- Conformance to RoHS

MARKETS

- 802.11 b/g/n WLAN applications
- Bluetooth® devices
- WiMAX MMDS
- WiMAX 3.5 GHz

Specifications	WTL2449S
Frequency	2.3 to 2.7 GHz, 3.3 to 3.9 GHz
Gain	2.3 dBi (2.3 to 2.7 GHz), 2.7 dBi (3.3 to 3.9 GHz)
Average Efficiency	58% (2.3 to 2.7 GHz), 65% (3.3 to 3.9 GHz)
Polarization	Vertical, Omnidirectional Radiation pattern
Nominal Impedance	50 Ohms
VSWR	< 2 : 1 (2.3 to 3.9 GHz)
Size	95.9 mm (180° straight) or 75.4 mm (90° bent) x 9.3 mm dia.

CABLES AND CONNECTORS

Part No.	Connector
WTS2333C-FRSMM	RP-SMA

global solutions: local support.™


Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com


Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com


**Typical Radiation Patterns
(Azimuth Plane - Theta 90°)**

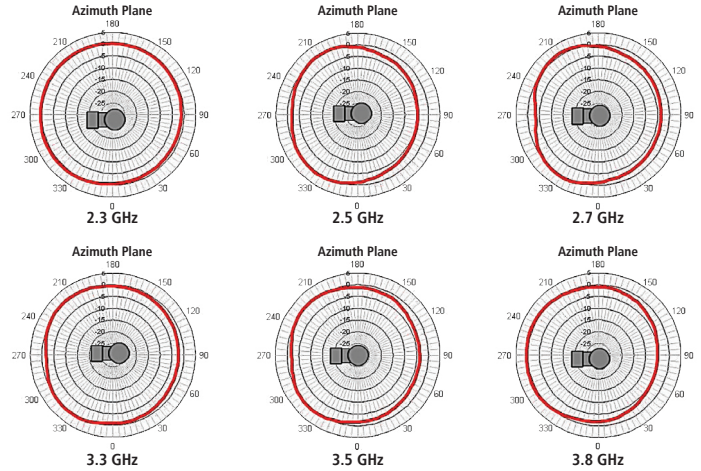

**Typical Radiation Patterns
(Elevation 0° Plane - Phi 0°)**

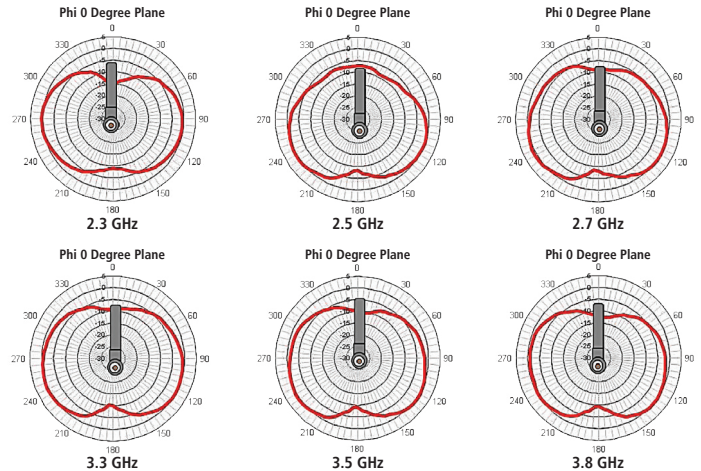

**Typical Radiation Patterns
(Elevation 90° Plane - Phi 90°)**

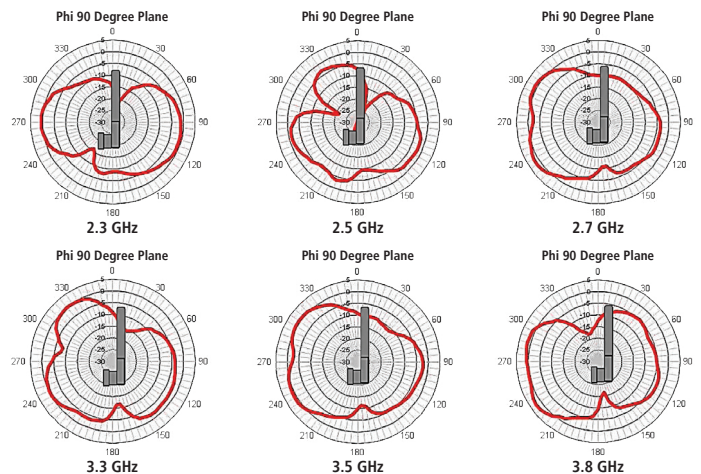

ANT-DS-WTS2333C-FRSMM 0511

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials or products rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2011 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.