

N-Channel Depletion-Mode MOSFET Transistors

Product Summary

Part Number	$V_{(BR)DSV}$ Min (V)	$r_{DS(on)}$ Max (Ω)	$V_{GS(off)}$ (V)	I_D (A)
ND2012L	200	12	-1.5 to -4	0.16
ND2020L		20	-0.5 to -2.5	0.132

Features


- High Breakdown Voltage: 220 V
- Normally "On" Low r_{DS} Switch: 9 Ω
- Low Input and Output Leakage
- Low-Power Drive Requirement
- Low Input Capacitance

Benefits

- Full-Voltage Operation
- Low Offset Voltage
- Low Error Voltage
- Easily Driven Without Buffer
- High-Speed Switching

Applications

- Normally "On" Switching Circuits
- Current Sources/Limiters
- Power Supply, Converter Circuits
- Solid-State Relays
- Telecom Switches

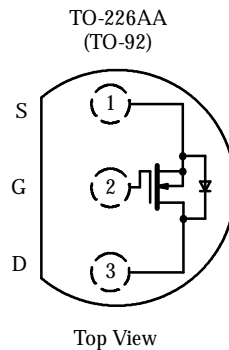

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Parameter	Symbol	ND2012L	ND2020L	Unit
Drain-Source Voltage	V_{DS}	200	200	V
Gate-Source Voltage	V_{GS}	? 30	? 30	
Continuous Drain Current ($T_J = 150^\circ\text{C}$)	I_D	$T_A = 25^\circ\text{C}$	0.16	A
		$T_A = 100^\circ\text{C}$	0.1	
Pulsed Drain Current ^a	I_{DM}	0.8	0.8	
Power Dissipation	P_D	$T_A = 25^\circ\text{C}$	0.8	W
		$T_A = 100^\circ\text{C}$	0.32	
Maximum Junction-to-Ambient	R_{thJA}	156	156	$^\circ\text{C}/\text{W}$
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 150		$^\circ\text{C}$

Notes

a. Pulse width limited by maximum junction temperature.

Updates to this data sheet may be obtained via facsimile by calling Siliconix FaxBack, 1-408-970-5600. Please request FaxBack document #70197. Applications information may also be obtained via FaxBack, request document #70612.

ND2012L/2020L

Specifications^a







Parameter	Symbol	Test Conditions	Typ ^b	Limits				Unit
				ND2012L		ND2020L		
				Min	Max	Min	Max	
Static								
Drain-Source Breakdown Voltage	$V_{(BR)DSV}$	$V_{GS} = -8\text{ V}, I_D = 10\ \mu\text{A}$	220	200				V
		$V_{GS} = -5\text{ V}, I_D = 10\ \mu\text{A}$	220			200		
Gate-Source Cutoff Voltage	$V_{GS(off)}$	$V_{DS} = 5\text{ V}, I_D = 10\ \mu\text{A}$		-1.5	-4	-0.5	-2.5	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\text{ V}, V_{GS} = ?\ 20\text{ V}$ $T_J = 125^\circ\text{C}$? 10		? 10	nA
					? 50		? 50	
Drain Cutoff Current	$I_{D(off)}$	$V_{DS} = 160\text{ V}, V_{GS} = -8\text{ V}$ $T_J = 125^\circ\text{C}$			1			μA
					200			
		$V_{DS} = 160\text{ V}, V_{GS} = -5\text{ V}$ $T_J = 125^\circ\text{C}$					1	
							200	
Drain-Saturation Current ^c	I_{DSS}	$V_{DS} = 10\text{ V}, V_{GS} = 0\text{ V}$	300	30		30		mA
Drain-Source On-Resistance ^c	$r_{DS(on)}$	$V_{GS} = 2\text{ V}, I_D = 20\text{ mA}$	7					Ω
		$V_{GS} = 0\text{ V}, I_D = 20\text{ mA}$	8		12		20	
		$T_J = 125^\circ\text{C}$	12.6		30		50	
Forward Transconductance ^c	g_{fs}	$V_{DS} = 7.5\text{ V}, I_D = 20\text{ mA}$	55					mS
Common Source Output Conductance ^c	g_{os}		75					μS
Dynamic								
Input Capacitance	C_{iss}	$V_{DS} = 25\text{ V}, V_{GS} = -5\text{ V}, f = 1\text{ MHz}$	35		100		100	pF
Output Capacitance	C_{oss}		10		20		20	
Reverse Transfer Capacitance	C_{rss}		2		5		5	
Switching^d								
Turn-On Time	$t_{d(on)}$	$V_{DD} = 25\text{ V}, R_L = 1250\ \Omega$ $I_D = 20\text{ mA}, V_{GEN} = -5\text{ V}$ $R_G = 25\ \Omega$	20					ns
	t_r		20					
Turn-Off Time	$t_{d(off)}$		10					
	t_f		10					

Notes

- $T_A = 25^\circ\text{C}$ unless otherwise noted.
- For DESIGN AID ONLY, not subject to production testing.
- Pulse test: $PW = 300\ \mu\text{s}$ duty cycle = 2%.
- Switching time is essentially independent of operating temperature.






VDDQ20

Typical Characteristics (25°C Unless Otherwise Noted)

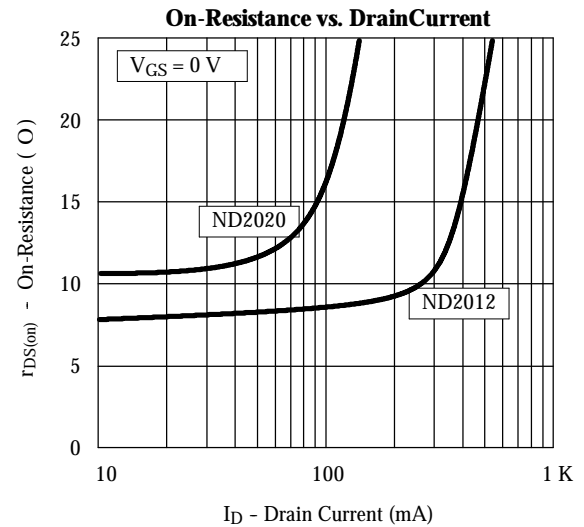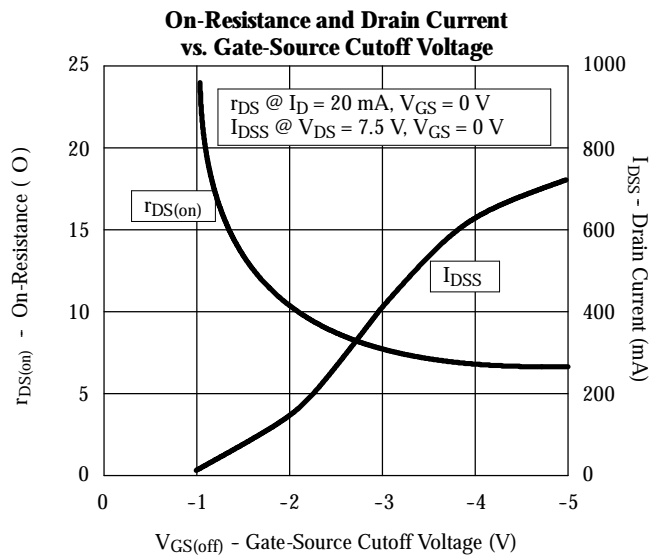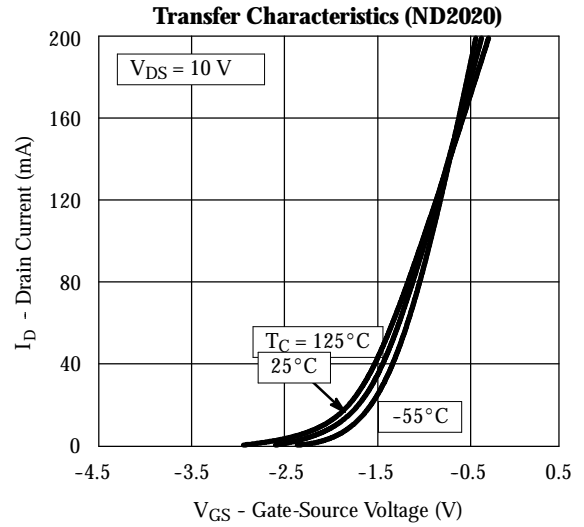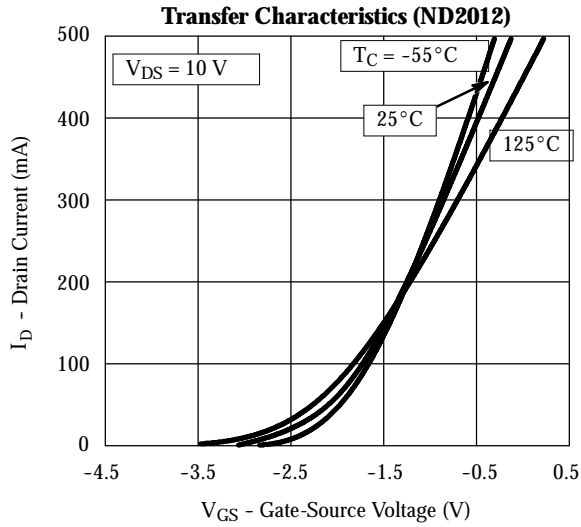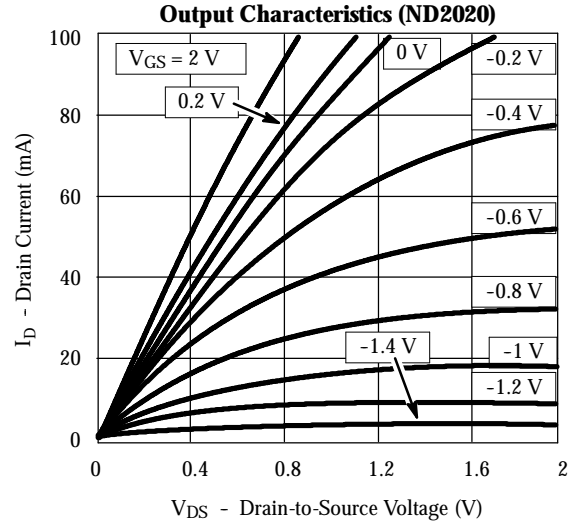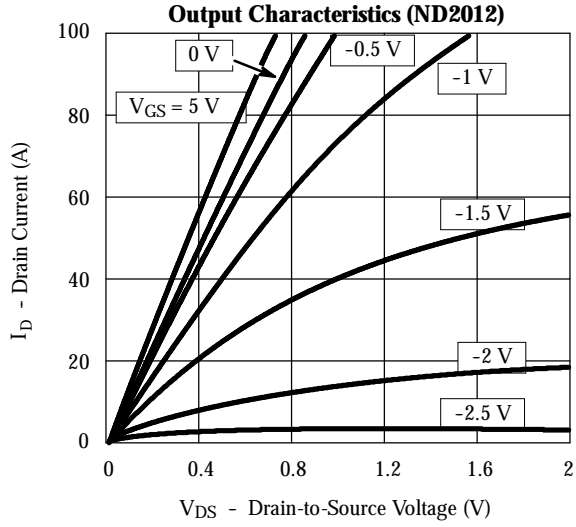

ND2012L/2020L

Typical Characteristics (25°C Unless Otherwise Noted) (Cont'd)

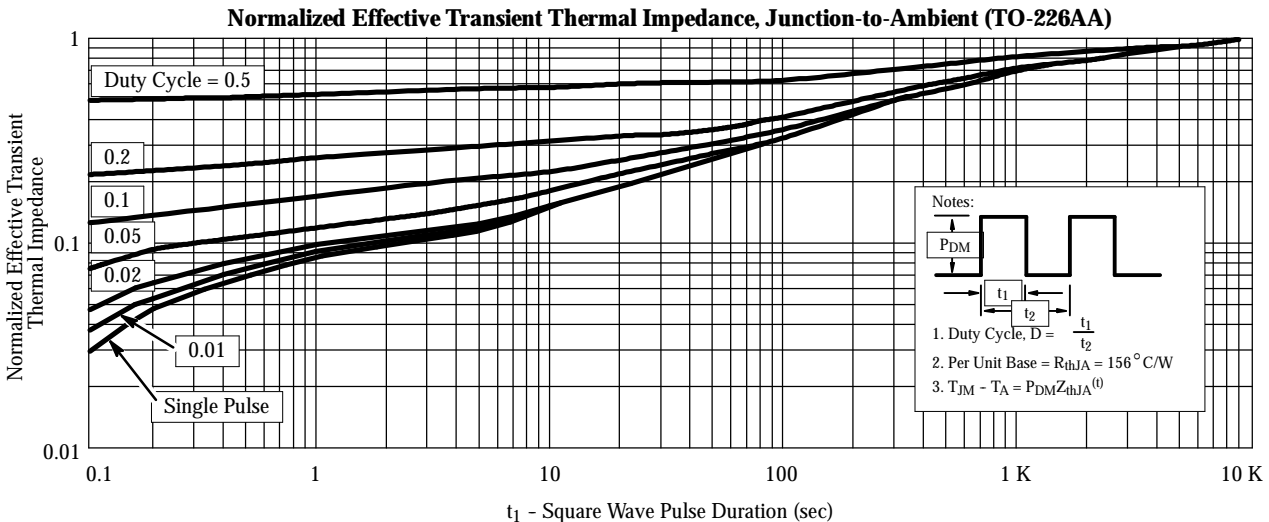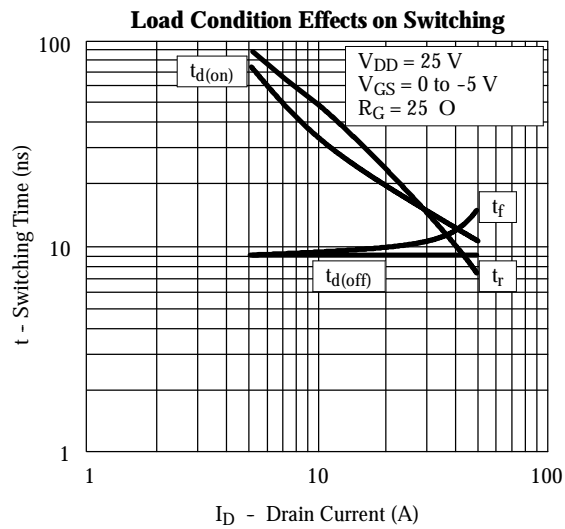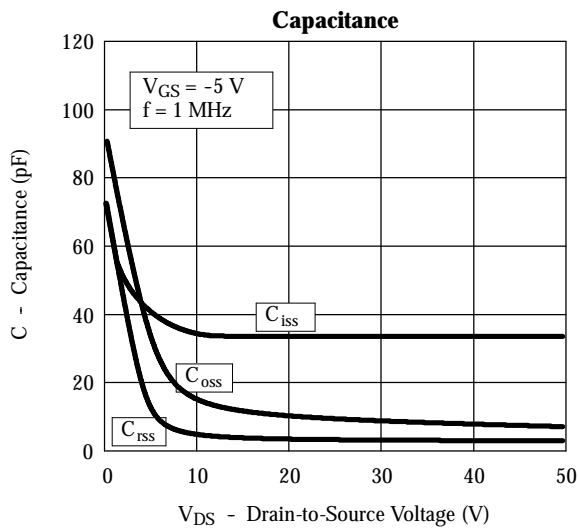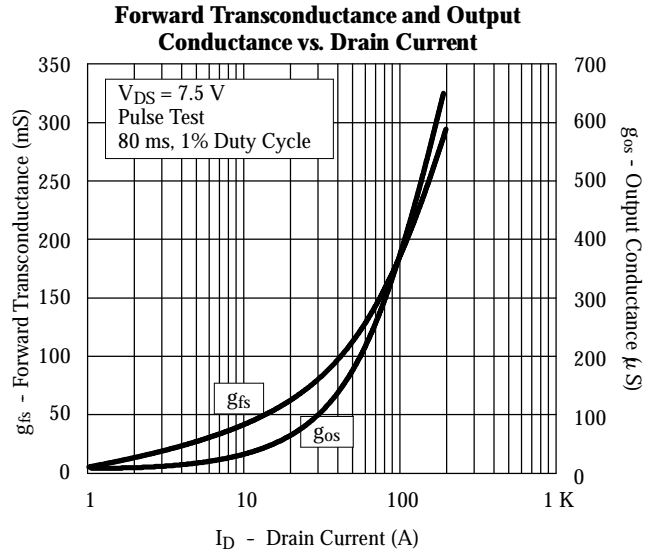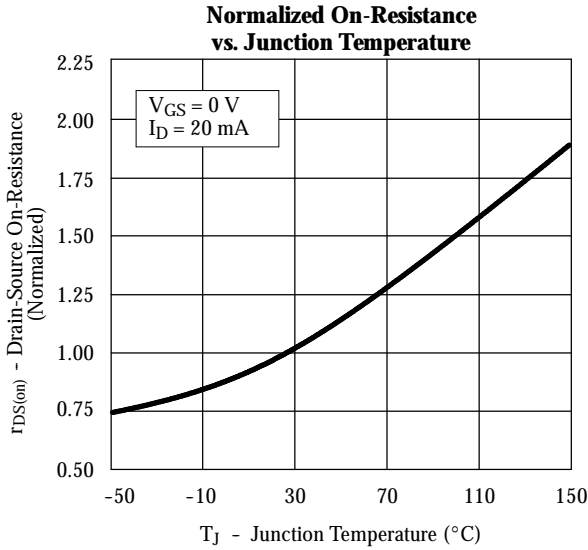



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.