

NOTES: UNLESS OTHERWISE SPECIFIED


1. P/N: XJLCOLOR
 HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
 CONTACT BLADE: NICKEL SILVER ALLOY.
 SPRING & NEEDLE POINT: STAINLESS STEEL.

2. P/N: 9302COLOR
 HOUSING: MOLDED NYLON. AVAILABLE IN ALL TEN COLORS.
 FRAME: NICKEL PLATED BRASS.
 CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
 HARDWARE: NATURAL NYLON NUT COVER. STAINLESS STEEL NUT.
 BRASS EYELET. COPPER, TIN PLATED. TERMINAL RING.

3. P/N: W-600/COLOR
 18AWG 65X36 TINNED COPPER
 0.144 [3.66] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.

4. PERFORMANCE
 MAXIMUM CURRENT: 4.0 AMPS
 MAXIMUM VOLTAGE: 5000 W.V.D.C.
 MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

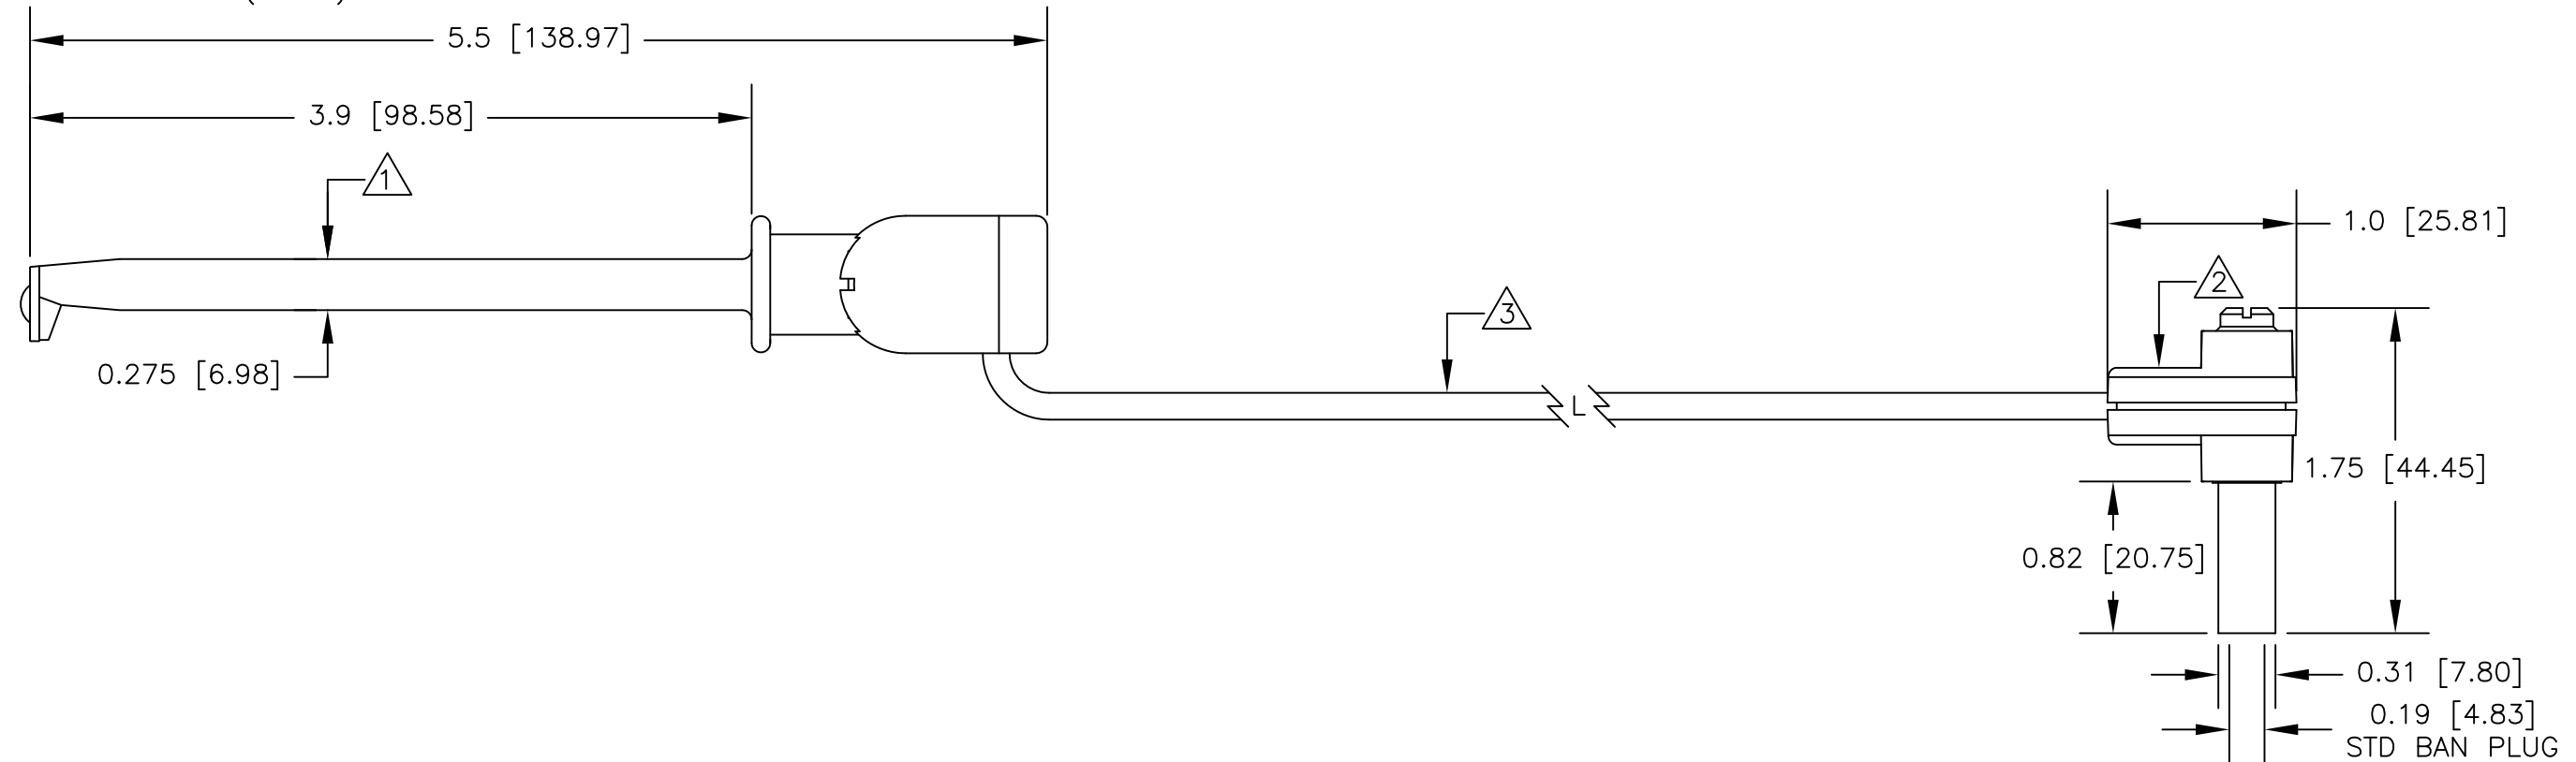

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.		
			APPROVALS	DATE			
		MATERIAL SEE NOTE.	DRAWN	R.L.	8/16		
			APPROVED BY				
		FINISH SEE NOTE.	SIZE		CODE IDENT NO.	DRAWING NO.	REV.
NEXT ASSY	USED ON		B		08505	633XJL	
APPLICATION		DO NOT SCALE DRAWING		SCALE		1:1	SHEET 1 OF 1