


Product Type	Current Transformer
AMGIS Part Number	#U
Customer Part Number	
Place of Manufacture	

SCHEMATIC:

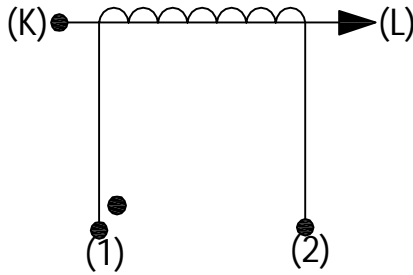


ELECTRICAL SPECIFICATION:

Rated input current = 75Amps
 Primary to Secondary isolation = 2500VAC
 Operating Frequency = 50 / 60 Hz
 Turns Ratio = 1 : 1000
 DC Resistance = 24.00 Ω
 Output Voltage = 7.5V @ 75A / 100Ω, 0.5700W
 I_o @ V_{rms} : 9.26V = 1520μArms
 Ratio Correction factor (RCF*) = 1.001@10% (Multiply current reading by this factor to compensate for transformer losses)


100Ω	500Ω	2000Ω	5000Ω
0.10	0.39	0.57	0.65

MECHANICAL SPECIFICATION :

Pin Side View




Front View

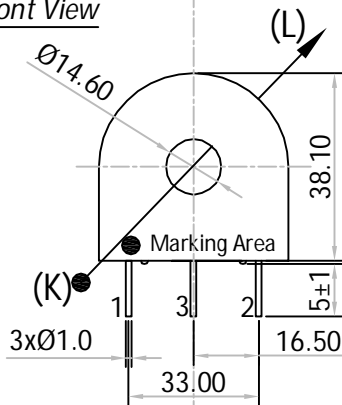


All dimensions are in mm
 Linear dimensional tolerance ±0.2mm

OUTPUT RESPONSE vs INPUT CURRENT @ RATED BURDEN :

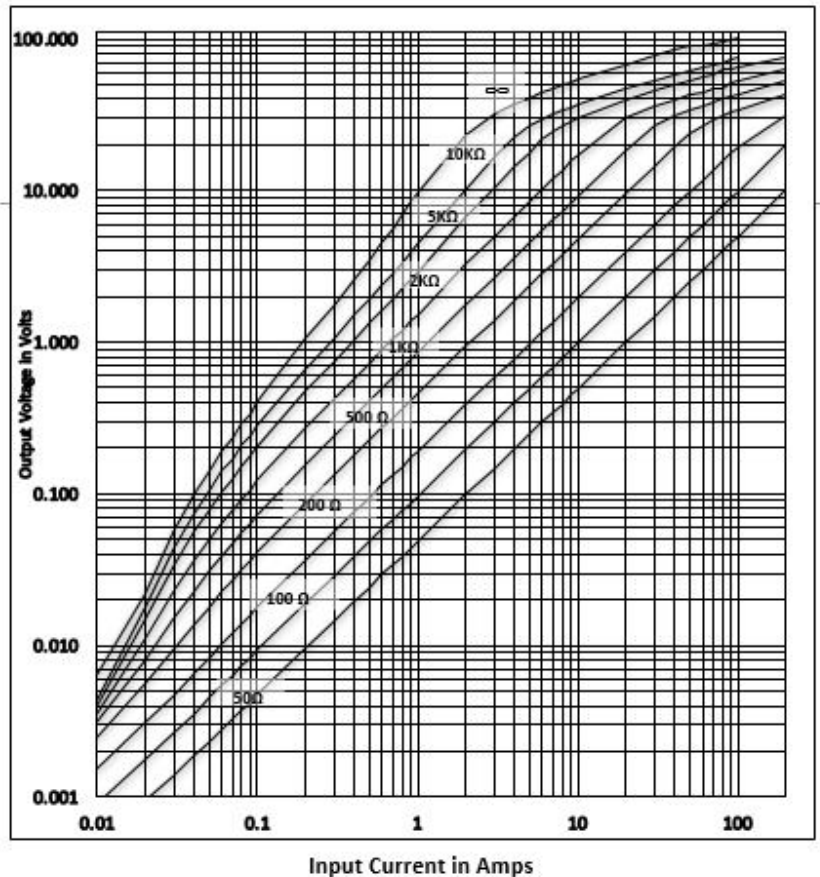


Note : Un-Used pin → #3

TYPICAL EXCITATION CURVE :

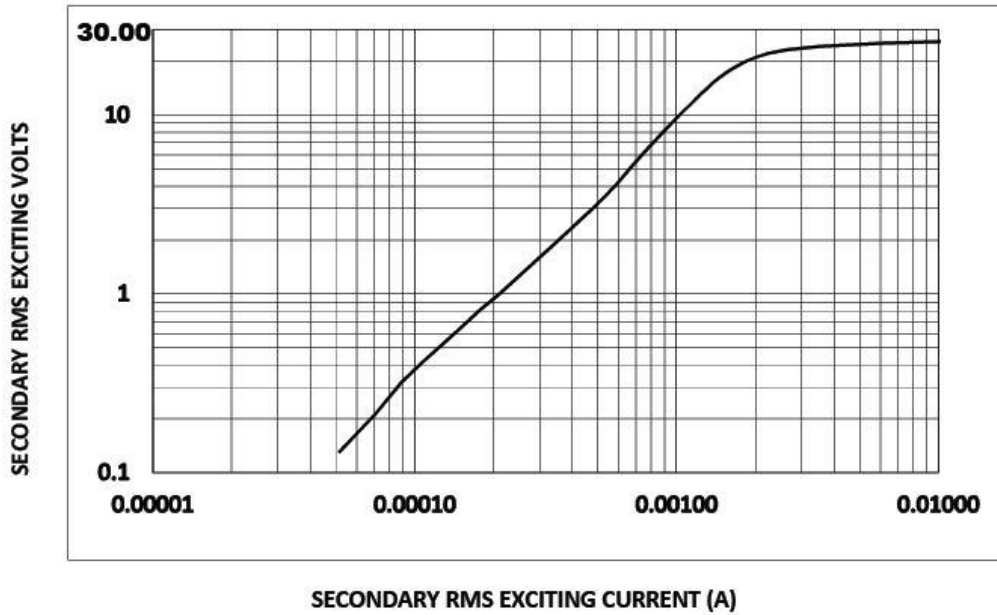

RATIO ERROR (%) vs RATED BURDEN @ INPUT CURRENT :

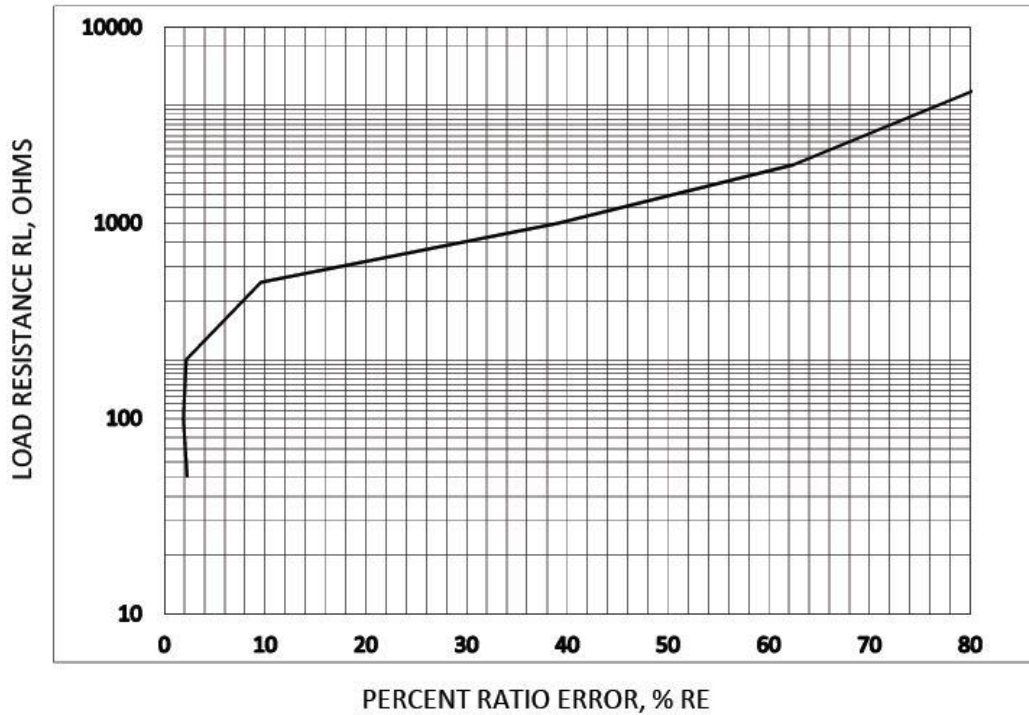

TRAFO WEIGHT:

Approx. Weight = 0.0652 kg / pc

MARKING INFORMATION:

L01-6219
 Ac yr / wk code
 ●
 Dot mark for Start pin identification

-----Initial Issue-----	1	0	Balaji. R	18-Nov'2015
Changes	Issue	Rev	Initial	Date